



TECHNICAL INFORMATION BULLETIN

High Pressure Sodium

Order Code: **14890**

Description: **LU1000B/EN EYE**

ANSI Code: **S52**

Features:

- Long Life
- Low cost efficient lighting
- Nickel plated base w/ceramic insulator


- Universal burning position
- EPA TCLP compliant for non-hazardous waste
- Green (EN) date code on base insulator

PERFORMANCE DATA


Initial lumens at rated watts after 100 hours operation	140000	lm
Mean lumens at 10 hours/start	126000	lm
Rated average life	24000+	h
Warm up time (90% lumens)	5	min
Correlated color temperature	2100	K
CIE chromaticity	0.532, 0.403	x, y
Color rendering index	25	
Operating Position	Any	
Hot Re-strike time	15	min

EPA TCLP Compliant

Yes




Spectral Distribution

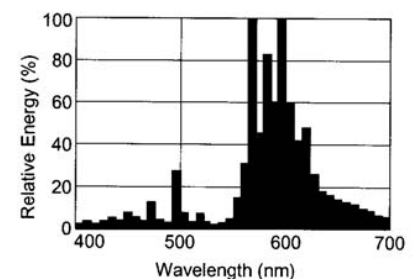

ELECTRICAL CHARACTERISTICS

Nominal lamp wattage	1000	W
Nominal lamp voltage	250	V
Nominal lamp current	4.7	A _{rms}
Current crest factor (max.)	1.8	
Max. starting current	8.0	A _{rms}
Min. starting current	4.7	A _{rms}
Ballast requirements	Use with ballast rated for S52 lamps	


LAMP MORTALITY

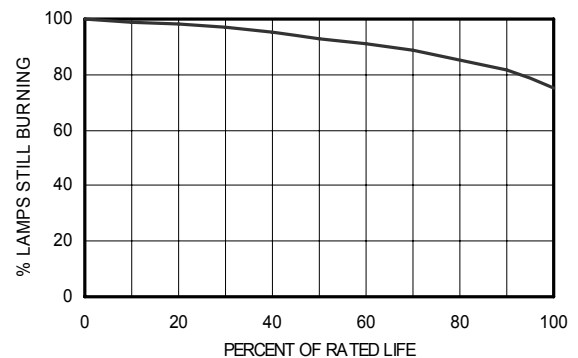

PHYSICAL DESCRIPTION

Maximum overall length	383 (15.08)	mm (in)
Light center length	222 (8.74)	mm (in)
Bulb diameter	78 (3.1)	mm (in)
Base to bulb eccentricity (max.)	3	Degrees
Maximum base temperature	210 (410)	°C (°F)
Maximum bulb temperature	400 (752)	°C (°F)
Bulb designation	E25	
Bulb material	Borosilicate (Hard Glass)	
Arc tube material	PCA	
Arc length	172 (6.77)	mm (in)
Bulb finish	Clear	
Base designation	Mogul (E39)	

LUMEN MAINTENANCE

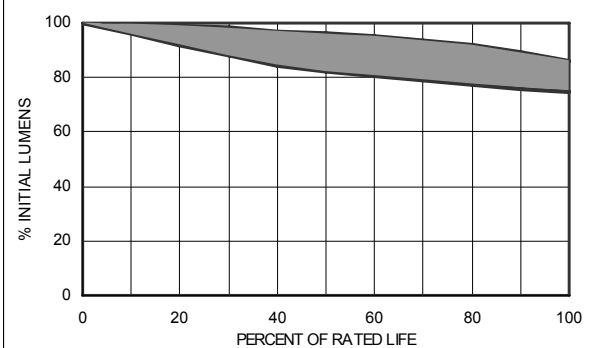



TECHNICAL INFORMATION BULLETIN

High Pressure Sodium

⚠ WARNING

RISK OF ELECTRIC SHOCK:

- Turn power off before inspection, installation or removal.
- Protect lamp from direct contact with liquids to avoid breakage from thermal shock.

RISK OF FIRE:

- Keep combustible materials away from lamp during operation.

UNEXPECTED LAMP RUPTURE MAY CAUSE INJURY, FIRE OR PROPERTY DAMAGE

- Do not exceed rated ballast voltage.
- Do not use lamp if outer glass is scratched or broken.
- Do not use beyond rated life.
- Do not turn on lamp until fully installed.
- Use only with fixture and ballast rated for this product.
- Electrically insulate any metal to glass support in fixture.

⚠ CAUTION

RISK OF BURN:

- Allow lamp to cool before handling.
- Contains sodium – Avoid skin contact with broken pieces.

LAMP MAY SHATTER AND CAUSE INJURY IF BROKEN

- Do not use excessive force when installing lamp.
- Dispose of lamp in an enclosed container.
- Wear safety glasses and gloves when installing lamp.

Note: All information subject to change without notice.

Hg-LAMP CONTAINS MERCURY
Manage in Accord with Disposal Laws
See: www.lamprecycle.org or 1-888-665-2677