



Z6950-XL-IM-S

Aqua-FIT® Battery Powered Faucet with Integral Mixer



Patented and Patent Pending

Flow Control Options

- ☐ -E 1.5 gpm/ 5.7 Lpm Vandal-Resistant Aerator
- ☐ -F 0.5 gpm/1.9 Lpm Vandal-Resistant Non-Aerated
- ☐ -J 1.5 gpm/ 5.7 Lpm Vandal-Resistant Laminar Flow
- ☐ -K 1.0 gpm/ 3.8 Lpm Vandal-Resistant Laminar Flow
- ☐ -L 1.0 gpm/ 3.8 Lpm Vandal-Resistant Aerator
- ☐ -M 0.35 gpm/1.3 Lpm Vandal-Resistant Non-Aerated
- ☐ -N 0.5 gpm/ 1.9 Lpm Vandal-Resistant Laminar Flow

Power Supply Choices (Sold Separately)

- ☐ -ACA 6 VDC Plug-In Power Converter
- ☐ -HW6 Hardwired Power Converter

Optional Power Supply Accessories

- ☐ -CWB Connector Wire for Hardwire Install
- ☐ -MJ Mini Junction Box

The information contained in this document is subject to change without notice.
Please contact Zurn for most up to date information.

ZURN INDUSTRIES, LLC. ♦ COMMERCIAL BRASS OPERATION
5900 ELWIN BUCHANAN DRIVE ♦ SANFORD NC 27330
Phone: 1-800-997-3876 ♦ Fax: 919-775-3541
www.zurn.com
In Canada: ZURN INDUSTRIES LIMITED
3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2
Phone: 905-405-8272 Fax: 905-405-1292

Aqua-FIT® is a trademark of Zurn Industries, LLC.

Engineering Specification

ADA compliant, battery powered, chrome plated sensor faucet for retrofit and new construction.

- Customizable Settings
 - Time-out
 - Line Purge
 - Sensor Range
 - Metering Mode
- Occupant Detection
 - Infrared convergence-type proximity sensor
 - Thirty Second Time out feature
- Spout module
 - Chrome Plated Cast Brass
- Dual Solenoid Operated
- Integral Above Deck Mixing
- Also Includes
 - In-line filter
 - 4 "AA" lithium batteries
 - Inlet for a 1/2"[13] ball riser

Accessories


- ☐ -5S 5 sec. Timeout
- ☐ -10S 10 sec. Timeout
- ☐ -15S 15 sec. Timeout
- ☐ -60S 60 sec. Timeout
- ☐ -CP4 Cover Plate 4"[102] Centers
- ☐ -CP8 Cover Plate 8"[203] Centers
- ☐ -LP12 Line Purge 2 min/12 hr
- ☐ -LP24 Line Purge 2 min/24 hr
- ☐ -LP48 Line Purge 2 min/48 hr
- ☐ -SH Supply Hoses for Mixing Valve
- ☐ -_____ Other

NOTE: For Hardwire applications furnish P6000-HW6 power converter. Order P6000-HW6 power converter separately.
The P6000-HW6 and P6000-MJ will power up to 8 sensor faucets.

Architectural/Engineering Approval

TYPICAL Z6950-XL-IM-S


AquaSense Battery Powered Faucet

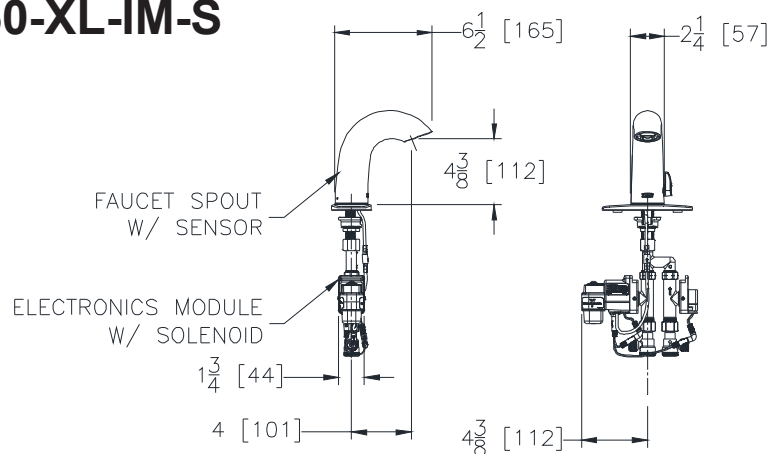

NOTE: Recommended through hole diameter to properly mount the spout/shank is 1-1/8" to 1-1/4".

TYPICAL Z6950-XL-IM-S-ACA

AquaSense Plug-In Powered Faucet

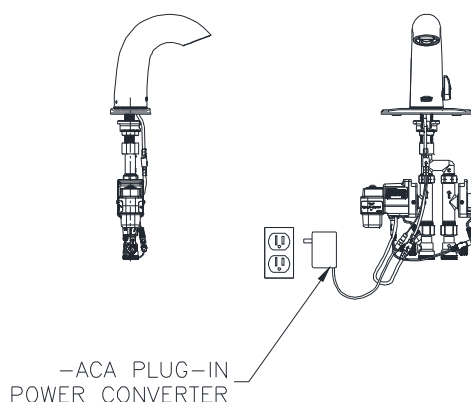

TYPICAL Z6950-XL-IM-S-CWB

AquaSense Hardwire Powered Faucet

Optional:

* Optional -MJ mini junction box for connecting up to 8 faucets

NOTE: MUST USE EITHER ZURN P6000-HW6 HARDWIRE POWER CONVERTER OR ZURN P6000-ACA PLUG-IN POWER CONVERTER TO ENSURE PROPER OPERATION. USING A POWER CONVERTER OTHER THAN ZURN MAY RESULT IN OPERATION MALFUNCTION OR UNIT FAILURE.

