

FLUORESCENT STRIP INSTALLATION INSTRUCTIONS



Order code	Description	Type of fixture	Family of fixture	Size of fixture	Number of lamps	Wattage (W)	Ballast	Voltage (V)
63510	FSS/4/132T8/2ISN/PW/STD	FS	S	4'	1	32	IS	120-277
63512	FSS/4/232T8/2ISN/PW/STD	FS	S	4'	2	32	IS	120-277
63514	FSS/8/432T8/2ISN/PW/STD	FS	S	8'	4	32	IS	120-277
63511	FSS/4/132T8/3ISN/PW/STD	FS	S	4'	1	32	IS	347
63513	FSS/4/232T8/3ISN/PW/STD	FS	S	4'	2	32	IS	347
63515	FSS/8/432T8/3ISN/PW/STD	FS	S	8'	4	32	IS	347

IMPORTANT: READ ALL INSTRUCTIONS BEFORE THE INSTALLATION.

WARNING: Risk of fire or electric shock. The installation should be performed only by a qualified electrician in accordance with the National Electrical Code and relevant local codes. This product must be installed in full accordance with applicable electrical and building codes.

TO PREVENT ELECTRICAL SHOCK, MAKE SURE TO TURN OFF MAINPOWER SWITCH PRIOR TO THE INSTALLATION.


INSTALLATION INSTRUCTIONS

- Ensure that the ambient temperatures are within the luminaire's rated limits.
- Check the nameplate's marking for more information.
- Unpack the luminaire and the mounting hardware kit.

SURFACE MOUNT

1. Remove the ballast cover (C) by unscrewing the twist latch (E) from either end.
2. Fix the sockets using the screw as shown in figure 2.
3. Use the luminaire as a template by placing it on the junction box and penciling in the four (4) hole positions. Put the luminaire aside and drill the four (4) holes. Insert an anchoring bolt (not included) into each hole.
4. Secure the luminaire into place with the help of mounting screws (not included) making sure to pass the junction box cables on the inside of the luminaire. (Fig.3)
5. Connect luminaire wires to junction box wires (wire connectors not included) as follows: ground wire to manufacturer's ground wire, LIVE wire to manufacturer's power wire, neutral wire to manufacturer's neutral wire.
6. Put the ballast cover (C) on the installed luminaire and secure into place with the twist latch (E) and the screw (F) from either end. (Fig.1) **CAUTION! Carefully push the connecting wires into the luminaire carefully. WIRES MUST NOT INTERFERE WITH THE BALLAST COVER.**
7. Install the lamp or lamps in the luminaire. (Fig.4)
8. Turn on the luminaire.


DRILL PATTERN DIMENSIONS		
FIXTURE LENGTH	D	d
2'	1' 4 1/16" (408 mm)	1 9/16" (40 mm)
3'	2' 4 1/16" (713 mm)	1 9/16" (40 mm)
4'	3' 4 1/16" (1018 mm)	1 9/16" (40 mm)
8'	7' 4 3/8" (2 245 mm)	1 9/16" (40 mm)

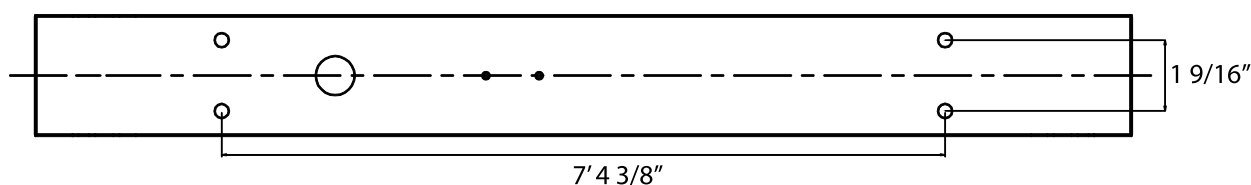


FLUORESCENT STRIP INSTALLATION INSTRUCTIONS




1

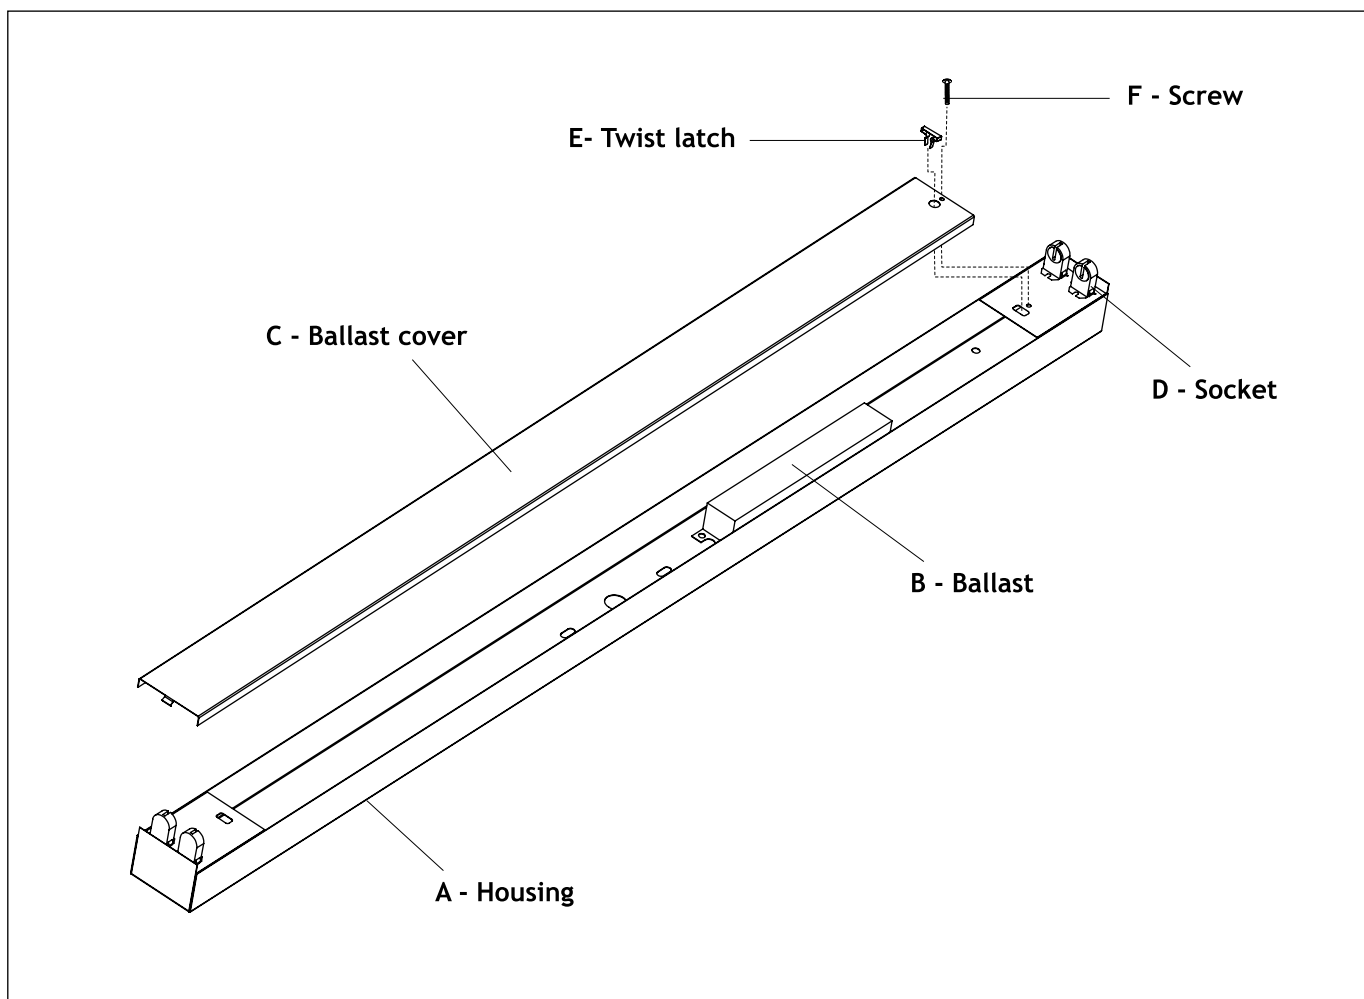


2

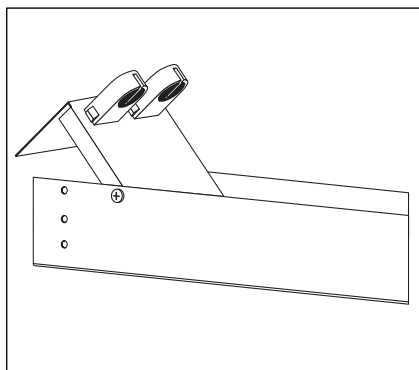

Non fixed sockets

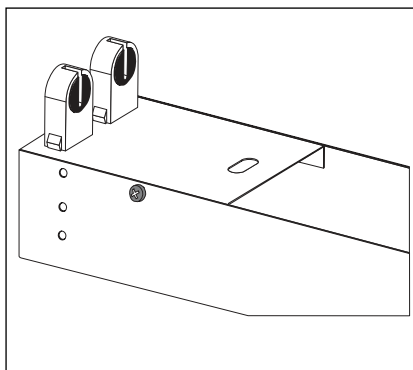

Align the sockets

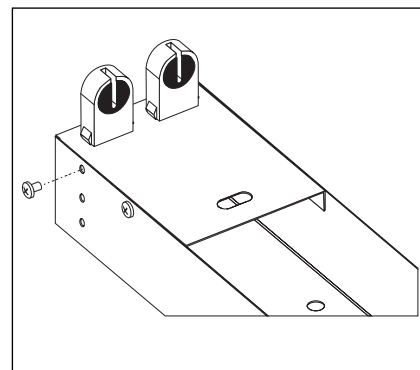


Secure with the screw

FLUORESCENT STRIP INSTALLATION INSTRUCTIONS



3

MOUNTING INSTRUCTIONS

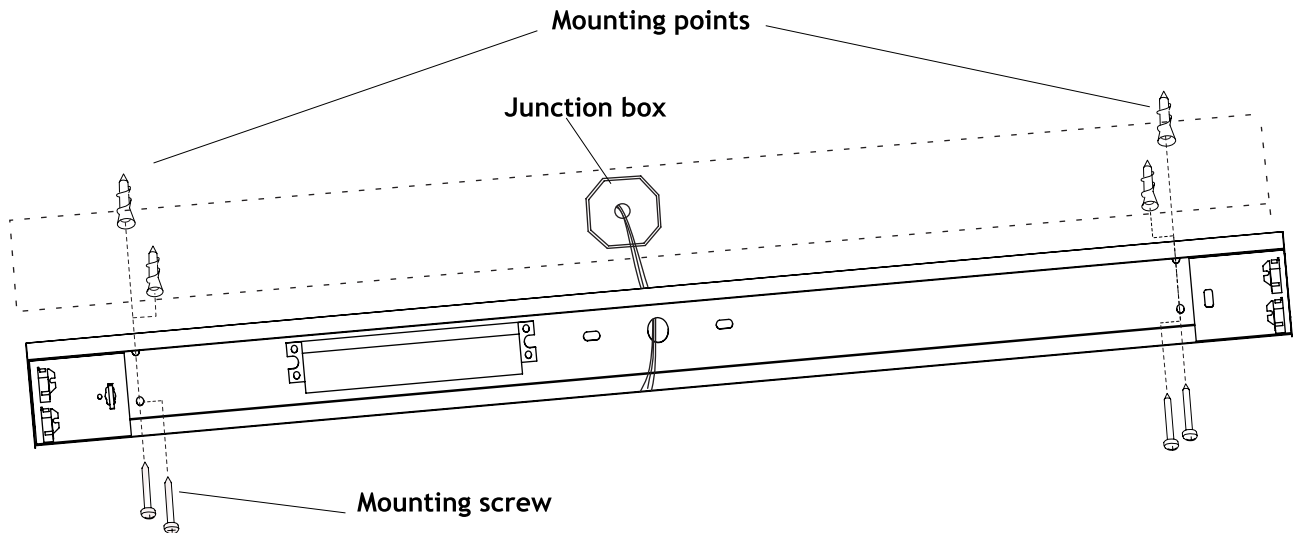

4

LAMP INSTALLATION

Put the lamp in the socket then turn it.

