

VAPOR TIGHT LED LUMINAIRE INSTALLATION INSTRUCTIONS



IMPORTANT: READ ALL INSTRUCTIONS BEFORE THE INSTALLATION.

WARNING: Risk of fire or electric shock. The installation should be performed only by a qualified electrician in accordance with the National Electrical Code and relevant local codes. This product must be installed in full accordance with applicable electrical and building codes.

TO PREVENT ELECTRICAL SHOCK, MAKE SURE TO TURN OFF MAIN POWER SWITCH PRIOR TO THE INSTALLATION.

INSTALLATION INSTRUCTIONS

- Disconnect all power to the wiring intended to be connected to the luminaire.
- Ensure that the ambient temperatures are within the luminaire's rated limits.
- Check the nameplate's marking for more information.
- Unpack the luminaire and remove the lens by releasing the ten clips securing the lens. Remove the reflector by squeezing the two clips located near the center line of the reflector.
- Remove and unpack the mounting hardware kit.

SURFACE MOUNT

Mount the two ceiling brackets (included with the mounting kit) directly to the ceiling using suitable anchors and screws. The housing will snap into these brackets when aligned.

SUSPENDED MOUNT


Insert the two "V" clips into the housing brackets for chain or cable suspension (chain and cable is not included).

WIRING

1. Remove and reverse the cable gland located at one end of the enclosure. Use a suitable type flexible power cable, water-resistant and heat (min. 90°C), 300 V voltage (configured for 120 V, 277 V) and 600 V voltage (configured for 347 V), 0.170" to 0.450" diameter. Insert power cable through the cable gland allowing for sufficient length of stripped cable inside the housing and tighten the gland.
2. Make the GROUND connection to the supplied green grounding conductor.
3. Make connections to the driver always observing polarity of the black (HOT) and white (NEUTRAL) conductors.
4. Replace the reflector by aligning and pushing the reflector onto the housing clips.
5. Replace the lens and secure all ten lens clips.
6. Apply power.

CAUTION: For LED replacement consult factory

VAPOR TIGHT LED LUMINAIRE INSTALLATION INSTRUCTIONS

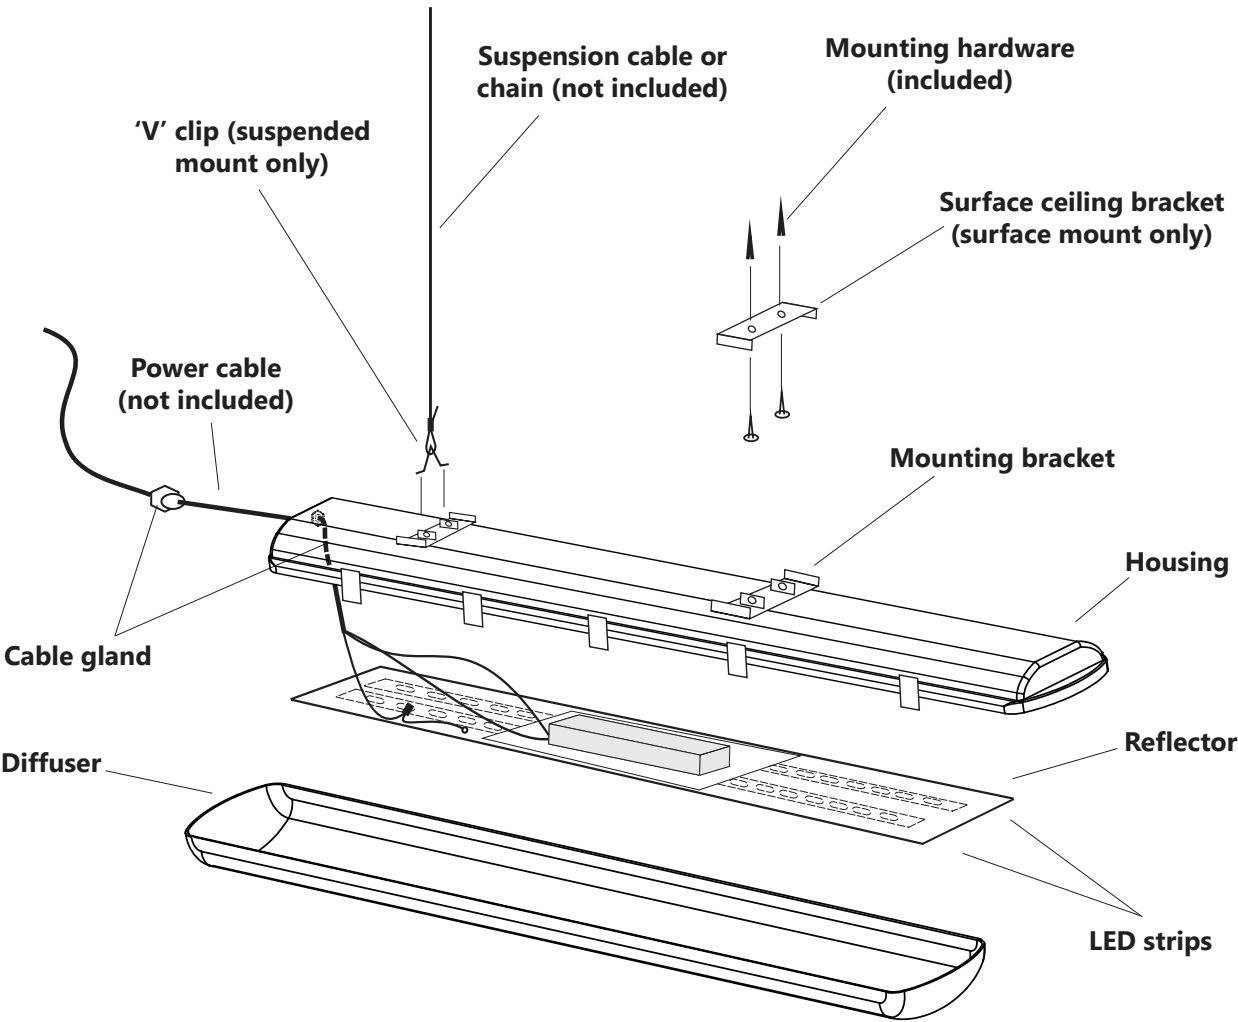

DIMENSIONS

