

TEMPCONTROL®

Thermostatic Mixing Valve

Tempcontrol thermostatic controller with swivel action check stops, removable cartridge with strainer, stainless steel piston and liquid fill thermal motor bellows element mounted out of water. Standard rough bronze finish.


Model No.	Inlets	Outlet
□ 5-102	1/2" (13mm)	1/2" (13mm)
□ 5-200	3/4" (19mm)	3/4" (19mm)
□ 5-400	3/4" (19mm)	1" (25mm)
□ 5-500	1" (25mm)	1 1/4" (32mm)
□ 5-700	1 1/4" (32mm)	1 1/2" (38mm)
□ 5-900	1 1/2" (38mm)	1 1/2" (38mm)
□ 5-1000	1 1/2" (38mm)	2" (51mm)

Modifications:

- **Suffix 1:** For use in photographic or x-ray work (available as model 5-200-1)
- **Suffix NI:** Rough chrome finish
- **Suffix P:** Polish chrome highlight finish
- **Suffix W:** Wall mounting bracket
- **Suffix RC:** Spare cartridge – recommended for non-interrupted service
- **Suffix HC:** for higher capacity up to 15 gpm (56.8 L/min) at 45 psi (310 kPa) (model 5-102 only)

Physical Dimensions

Model No.	A	B	C	D	E
5-102	3 1/2" (89mm)	5 3/4" (146mm)	2 1/8" (54mm)	–	1 15/16" (49mm)
5-200	6 1/4" (159mm)	5 3/8" (137mm)	1 7/8" (48mm)	2 5/8" (67mm)	2" (51mm)
5-400	6 1/4" (159mm)	6 3/8" (162mm)	1 7/8" (48mm)	2 7/16" (62mm)	2 5/8" (67mm)
5-500	8" (203mm)	7" (178mm)	1 5/8" (41mm)	2 7/8" (73mm)	3 1/8" (79mm)
5-700	8" (203mm)	7" (178mm)	1 5/8" (41mm)	2 7/8" (73mm)	3 1/8" (79mm)
5-900	12" (305mm)	7 3/4" (197mm)	2 9/16" (65mm)	–	3 3/8" (86mm)
5-1000	12" (305mm)	7 3/4" (197mm)	2 9/16" (65mm)	–	3 3/8" (86mm)

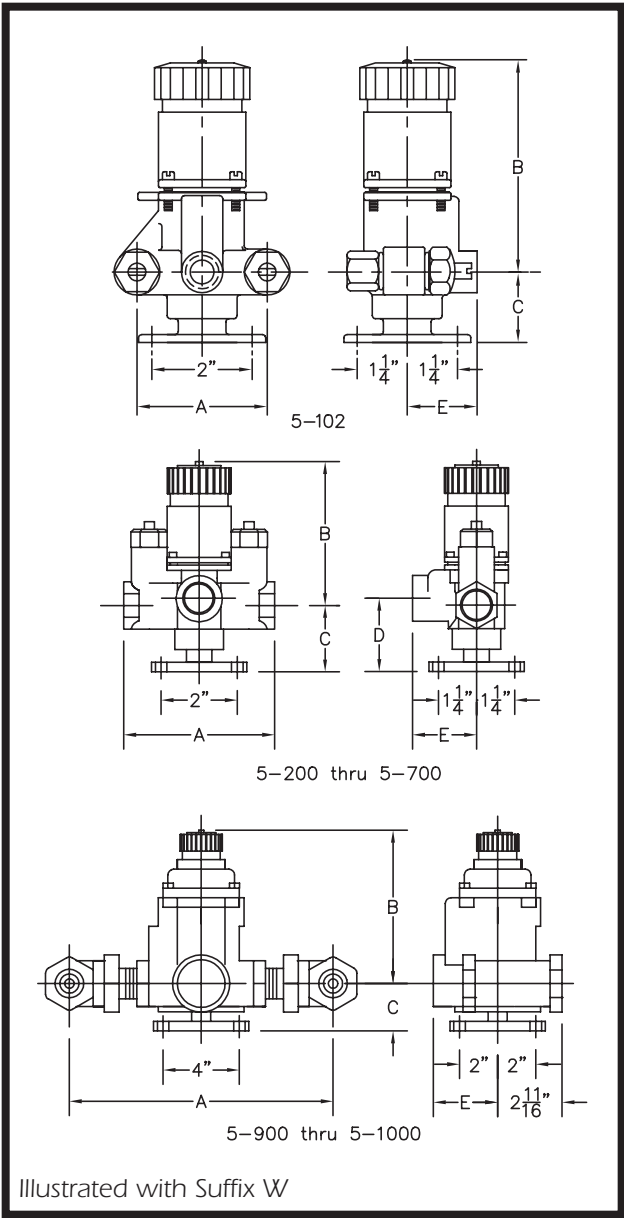

Job/Location

.....
.....

Engineer

.....
.....

Location

.....
.....

SYMMONS INDUSTRIES, INC.
31 Brooks Drive, Braintree, MA 02184-3804
TEL: 1-800-SYMMONS, (781) 848-2250 FAX: 1-800-961-9621, (781) 843-3849
Web site: www.symmons.com

