

LINT TRAP FOR STACKER DRYER

Model LT400SD



bottom view
of the lint trap

FEATURES:

- Simple and quick installation
- 38 sq. inch filtering area increases dryer efficiency
- Stainless steel filter screen for long life
- Available in 4" & 5" dia. sizes outlet
- Viewing Plexiglass
- Oven baked finish
- Easy to clean
- Positive lock

Sept., 2008




top view
of the lint trap



REVERSOMATIC
MANUFACTURING LIMITED
www.reversomatic.com

LINT TRAP FOR STACKER DRYER

Model LT400SD

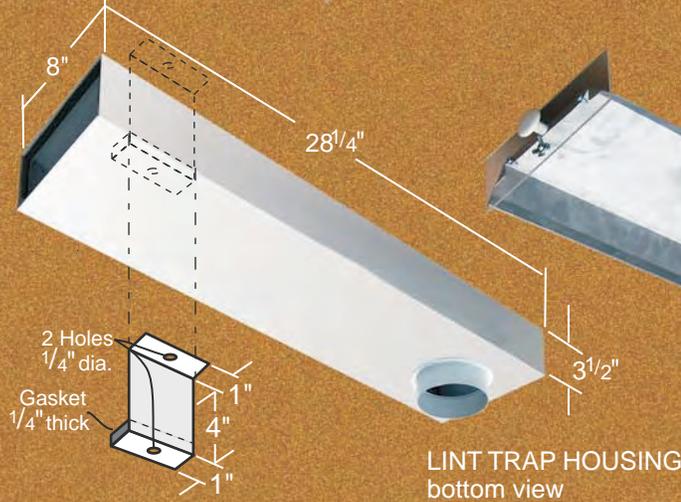


4-CEILING MOUNTING BRACKET (optional)

LINT TRAP HOUSING bottom view



S.S.FILTER

PULL OUT FILTER TRAY bottom view

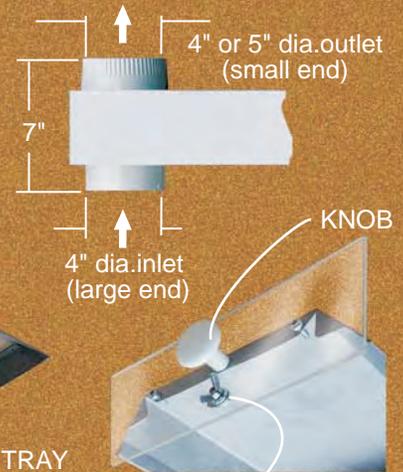

POSITIVE LOCK

INSTALLATION INSTRUCTIONS



- Clean the dryer top surface properly before installation.
- Mark Lint Trap position on the dryer, the lint trap I/L collar and the dryer exhaust must be aligned correctly.
- Fix double sided foam tape on the bottom surface of the lint trap as shown tapes spacing equally.
- Remove the remaining side of the foam tape strips and install the lint trap on the dryer top surface as marked.
- Apply some force downwards on the lint trap to hold it firmly.
- Connect I/L & O/L pipes as shown.
- Always use solid metal pipe.
- Installation of the lint trap must be done by a qualified person and be in accordance with all municipal and national codes and standards.

IMPORTANT: CLEAN LINT TRAP BEFORE EVERY DRYER CYCLE



REVERSOMATIC
MANUFACTURING LIMITED

790 ROWNTREE DAIRY ROAD . WOODBRIDGE, ONTARIO, CANADA L4L 5V3
PHONE (905) 851-6701 . FAX (905) 851-8376
www.reversomatic.com • EMAIL: info@reversomatic.com