



### SUPER QUIET EXHAUST FAN

The QCF-125 fan is designed for high performance and quiet operation. This fan is equipped with specially designed mounting slots that allow for easy installation on concrete ceilings or wooden joists. The QCF-125 is constructed with corrosion resistant, heavy gauge satin coat steel. The fan is suitable for installation over bath tub or shower stall with GFCI protected branch circuit. It also meets Washington State Ventilation and Indoor Air Quality Code.



Plastic Backdraft Damper

Off White Aluminum Grille




High Impact Styrene Grille



Off White Louvered Grille

### QCF-125 FAN DATA

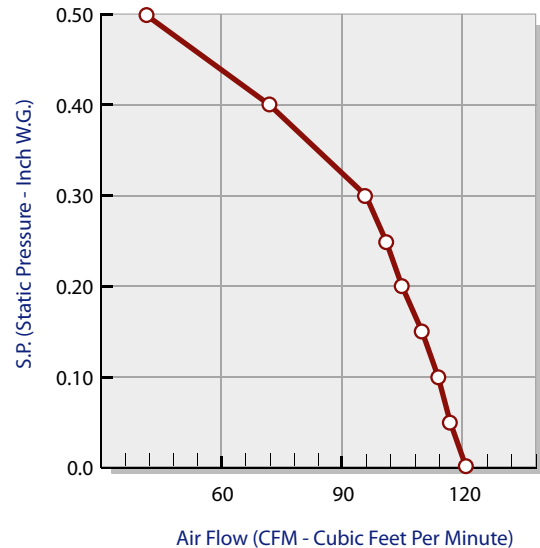

### ACCESSORIES

#### Standard:

- Insulated housing
- Plastic backdraft damper or metal collar with neoprene damper
- Mounting brackets
- Styrene grille or off white louvered grille


#### Optional:

- Variable speed control
- Off white aluminum grille
- Aluminum backdraft damper



**Reversomatic Manufacturing Ltd.**

790 Rowntree Dairy Road, Woodbridge, ON Canada L4L 5V3 • Tel: 905-851-6701 • Fax: 905-851-8376  
www.reversomatic.com • info@reversomatic.com

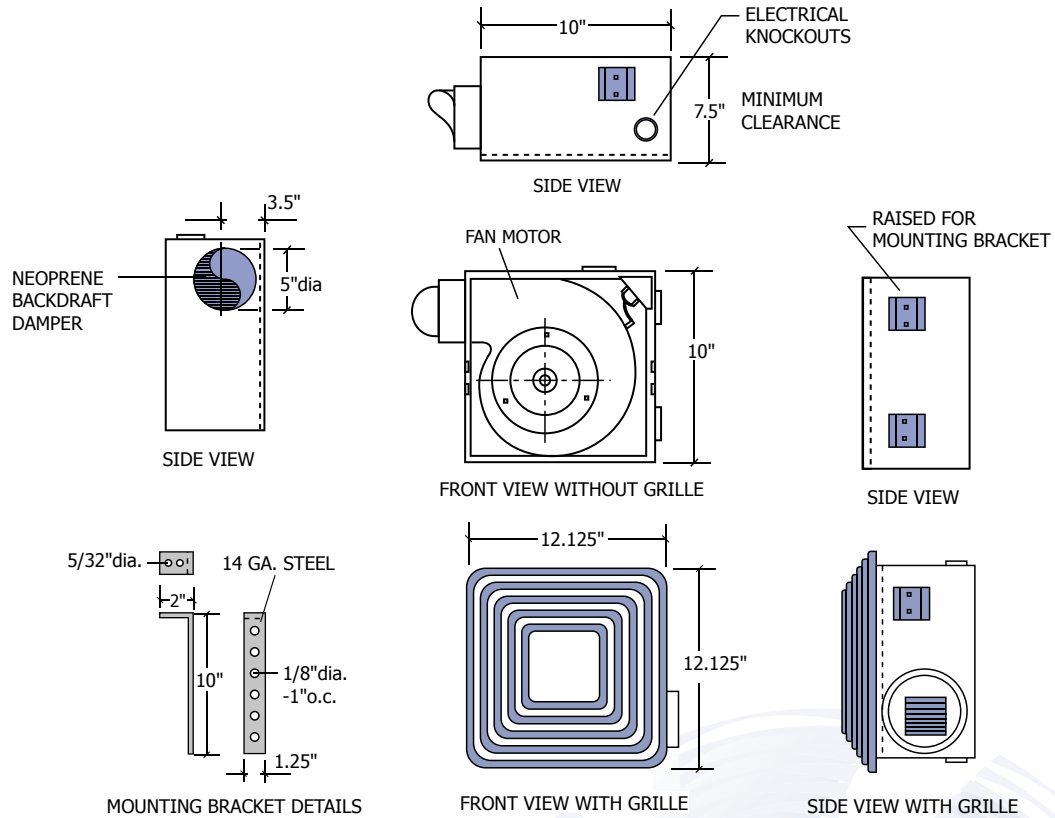

### HVI CERTIFIED RATINGS

| MODEL   | SONES | CFM @ 0.10" S.P. |
|---------|-------|------------------|
| QCF-125 | 2.0   | 110              |

### FAN DATA

| MODEL   | MOTOR 120 VAC 60 Hz |      |      | CUBIC FEET PER MINUTE |      |      |      |      |      |      |      |      |      |
|---------|---------------------|------|------|-----------------------|------|------|------|------|------|------|------|------|------|
|         | RPM                 | AMPS | HP   | S.P.                  | 0.00 | 0.05 | 0.10 | 0.15 | 0.20 | 0.25 | 0.30 | 0.40 | 0.50 |
| QCF-125 | 1050                | 0.7  | 1/90 | CFM                   | 121  | 117  | 114  | 110  | 105  | 101  | 96   | 72   | 41   |

RPM (Revolution Per Minute) shown is nominal and performance is based on actual speed of test.  
Unit was tested with inlet grille, backdraft damper and outlet duct.

### SOUND RATING

| OCTAVE BAND                                | 1    | 2    | 3    | 4    | 5    | 6    | 7    | 8    |
|--|------|------|------|------|------|------|------|------|
| CENTER FREQUENCY Hz                        | 63   | 125  | 250  | 500  | 1000 | 2000 | 4000 | 8000 |
| FULL-OCTAVE BAND SOUND PRESSURE LEVEL (dB) | 40.8 | 47.2 | 39.4 | 34.0 | 31.5 | 24.0 | 19.4 | 14.4 |

|             |                 |      |             |
|-------------|-----------------|------|-------------|
| Contractor: | QCF-125         |      |             |
| Architect:  | Job:            | Date | Supersedes  |
| Engineer:   | Date Submitted: |      | Drawing NO. |

### Reversomatic Manufacturing Ltd.

790 Rowntree Dairy Road, Woodbridge, ON Canada L4L 5V3 • Tel: 905-851-6701 • Fax: 905-851-8376  
www.reversomatic.com • info@www.reversomatic.com