

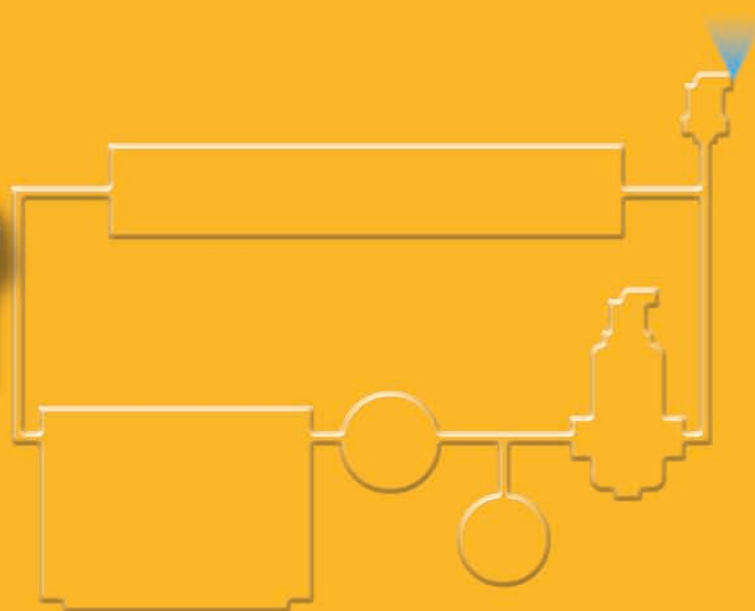


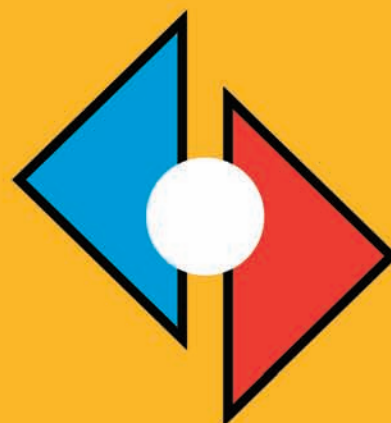

# SPIROTOP®

A U T O M A T I C   A I R   V E N T

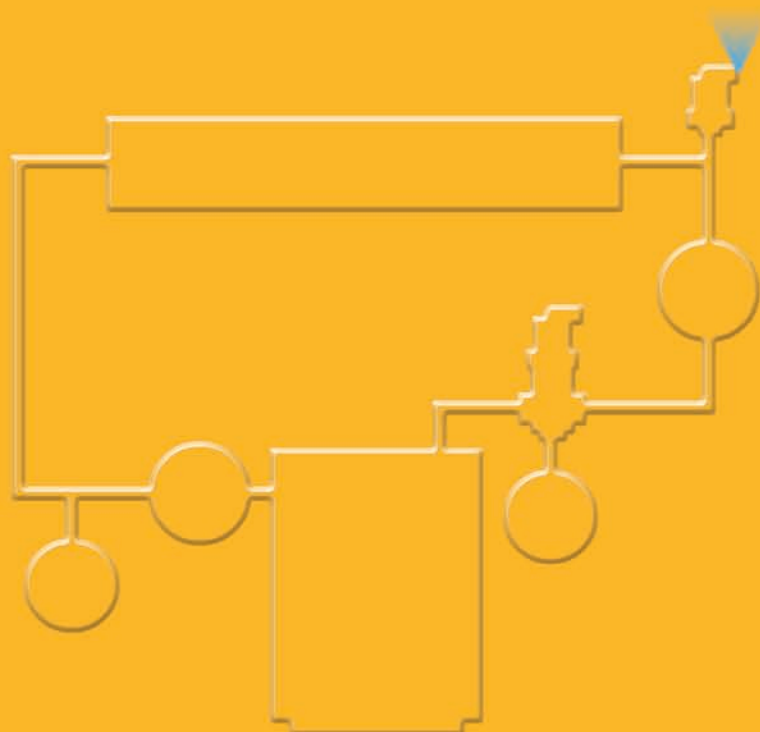

R E L I A B L E   V E N T I N G   O F   F L U I D   S Y S T E M S



# An Automatic Air Vent That's Top of the Line

When you first start up your hydronic heating or cooling system, you'll find that many air bubbles are large enough to rise to the top on their own. There is an automatic air vent that will quickly gather and release these bubbles. You won't have to manually bleed hard-to-reach areas, such as the tops of risers, tanks, unit heaters, and horizontal lines near the ceiling.

## The result?

Residential, commercial and, yes, even industrial systems start up in much less time with no aggravation.

Known for its reliability, this unique automatic air vent can be found in millions of installations around the world.




## The name:

**SPIROTOP®**

Spirotop's low profile and high-compression valve combine to give you a leak-resistant, high point vent that fits just about anywhere. Moreover, Spirotop resists dirt particles and sudden pressure shocks, which can cause ordinary vents to leak.

When filling or draining a system, venting high points, or eliminating air locks, the Spirotop automatic air vent is the only choice for those who want reliable, problem-free results every time. Try a Spirotop. We think you'll find it's much more than an air vent. It's a problem solver!

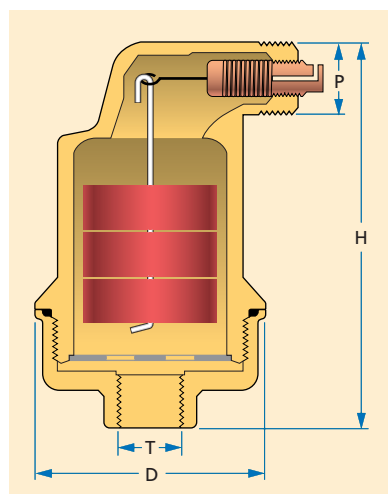


H = 4 $\frac{3}{8}$ "    T = 1/2" female thread  
D = 2 $\frac{5}{8}$ "    P = 1/2" male thread

## ADVANTAGES TO THE INSTALLER AND END-USER

- Maintenance free.
- Continuous air venting.
- 150 psig standard working pressure.\*
- 270° F maximum temperature.
- Sized to fit almost anywhere.
- Dirt resistant.
- Leak resistant.
- 1/2" male thread at vent point for pressure testing or remote venting of unwanted gasses.
- Quick removal of large air bubbles.
- Reliable vacuum breaker for system draining.

## The principal difference

1. Unique valve mechanism is guaranteed not to leak and cannot be shut off. Standard thread for vent pipe connection or pressure testing.
2. Specially constructed air chamber to protect the valve mechanism from dirt. Sufficient volume to handle pressure fluctuations.
3. Solid brass construction for extended service life.\*

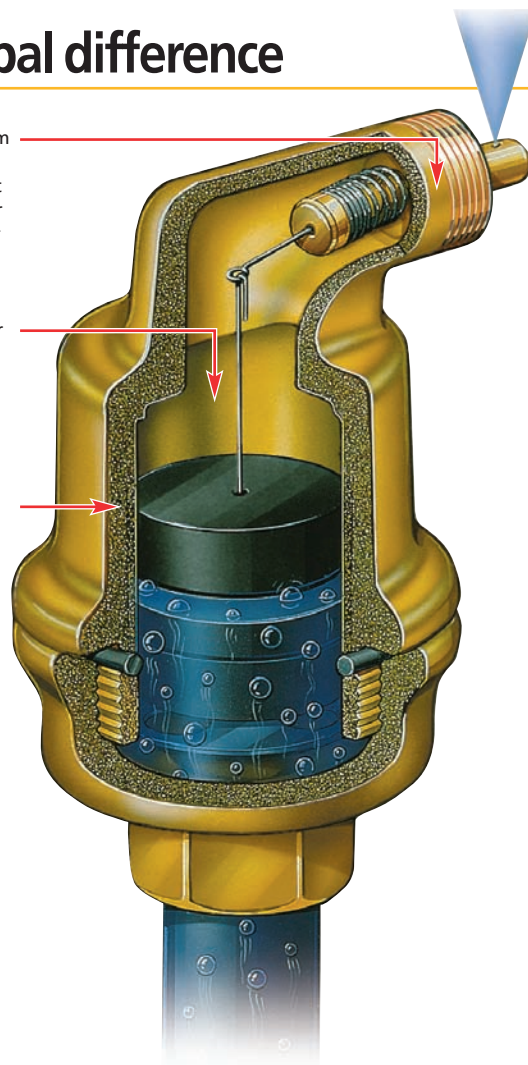

An automatic air vent will only remove free air. Contact your local Spirotherm representative for more information on the Spirovent® air eliminator.

\*Other materials, pressures and temperatures are available on request.

**SPIROTHERM**

A Spiro Enterprises Company

**Spirotherm, Inc.**  
25 N. Brandon Drive  
Glendale Heights, IL 60139

Tel.: 630-307-2662  
Fax: 630-307-3773

Website: [www.spirotherm.com](http://www.spirotherm.com)  
E-mail: [info@spirotherm.com](mailto:info@spirotherm.com)