



IN-LINE FANS

*better AIRFLOW
by DESIGN™*



AXC IN-LINE DUCT FANS

- Heavy gauge, drawn steel housing with baked epoxy finish
- Exceptionally quiet & efficient BC motorized impeller
- Precision balanced for quiet & vibration-free operation
- Automatic reset thermal overload protection
- ENERGY STAR® qualified models
- 120V operation, other voltages available
- Speed control available
- Size 4" to 14", capacities to 1,400 cfm

AXC IN-LINE DUCT FANS




PERFORMANCE DATA

MODEL	WATTS	RPM	ENERGY STAR®	CUBIC FEET PER MINUTE									
				0"SP	0.2"SP	0.4"SP	0.6"SP	0.8"SP	1.0"SP	1.2"SP	1.5"SP	2.0"SP	3.0"SP
AXC100A-ES	43.3	2580	YES	147	130	107	82	57	34	11			
AXC100B	83.4	2620	NO	150	140	127	112	94	74	53	23		
AXC125A-ES	44.4	2520	YES	179	150	121	87	49	14				
AXC125B	85.4	2750	NO	183	160	141	122	101	77	51	14		
AXC150A-ES	46.8	2390	YES	235	190	148	97	44					
AXC150B-ES	89.2	2450	YES	308	260	216	175	139	108	81	47		
AXC200A-ES	84.5	2500	YES	368	300	234	184	149	114	70			
AXC200B	188	2550	NO	579	520	453	387	329	282	245	206	154	
AXC250-ES	197	2470	YES	616	550	488	431	379	330	286	227	143	
AXC300A-ES	206	2450	YES	780	700	595	420	330	290	255	210	132	
AXC300B-ES	312	2780	YES	970	910	803	680	559	453	367	273	164	
AXC355A	334	1360	NO	1325	1150	960	790	660	550	430	238		
AXC355B	830	2900	NO	1400	1370	1325	1250	1210	1135	1090	1000	880	675

DIMENSIONS IN INCHES

MODEL	D (in.)	d (in.)	a (in.)	B (in.)	WT (lbs)
AXC100A-ES	9.5	3.9	1.0	8.3	6.5
AXC100B	9.5	3.9	1.0	8.3	6.5
AXC125A-ES	9.5	4.8	1.0	8.3	6.5
AXC125B	9.5	4.8	1.0	8.3	6.5
AXC150A-ES	9.5	5.8	1.0	8.3	6.5
AXC150B-ES	13.2	5.8	1.0	9.1	11.0
AXC200A-ES	13.2	7.8	1.0	9.1	11.0
AXC200B	13.2	7.8	1.0	9.1	11.0
AXC250-ES	13.2	9.8	1.0	9.1	11.0
AXC300A-ES	15.9	11.8	1.2	11.8	18.0
AXC300B-ES	15.9	11.8	1.2	11.8	20.0
AXC355A	19.0	14.0	1.5	15.7	26.0
AXC355B	19.0	14.0	1.5	15.7	31.0

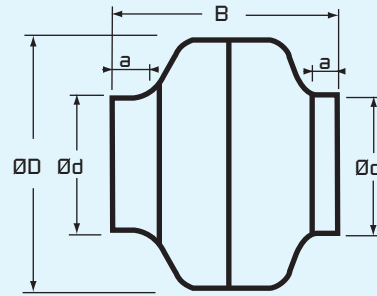

AXC models 355A and 355B are CSA listed to both US and Canadian standards.

Products are HVI certified for airflow and power at 0.2" SP. HVI currently does not have a standard in place for testing the sound of a remote mounted fan. Many factors, such as ducting and fan location, can contribute to sound levels. Generally, a remote mounted fan should be quieter than a typical ceiling mounted fan.

Fan models ending in -ES are ENERGY STAR® qualified

Available Accessories

A full range of accessories is available to suit each custom application.

				
Speed Controls	Supply & Exhaust Grilles	Backdraft Dampers	Mounting Clamps	Pressure Switches

www.continentalfan.com

—better AIRFLOW by DESIGN™

USA - Continental Fan Manufacturing Inc.

203 Eggert Road, Buffalo, NY 14215

T: 716-842-0670 • 800-779-4021 • F: 716-842-0611

Canada - Continental Fan Canada Inc.

12-205 Matheson Blvd E, Mississauga, ON L4Z 3E3

T: 905-890-6192 • 800-779-4021 • F: 905-890-6193

AXC IN-LINE DUCT FANS



AXC-IFD-1204