



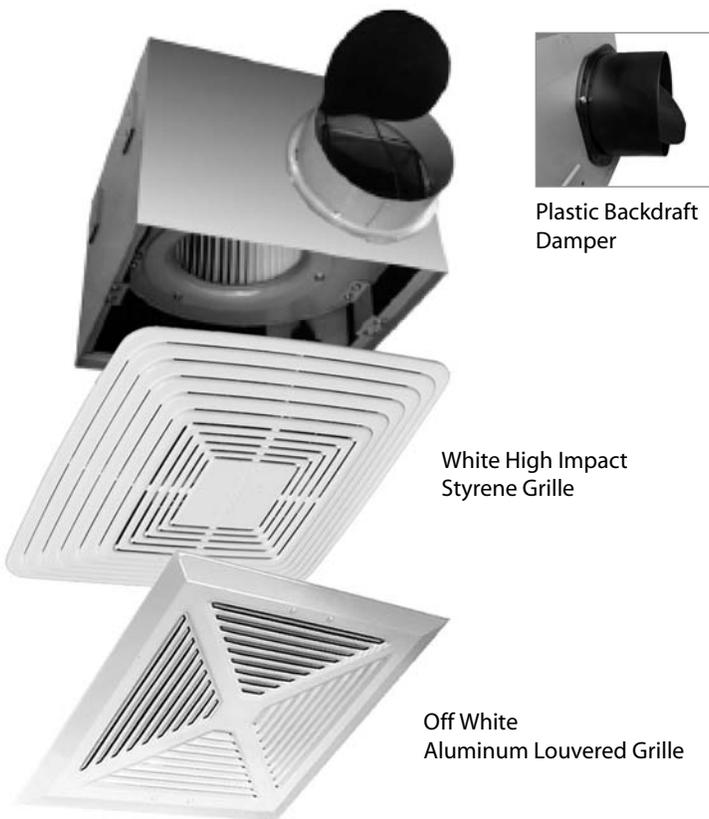

ULTRA SUPER QUIET EXHAUST FAN

The QCF-110 fan is designed for high performance and quiet operation. This fan is equipped with specially designed mounting slots that allow for easy installation on concrete ceilings or wooden joists. The QCF-110 is constructed with corrosion resistant, heavy gauge satin coat steel. The fan is suitable for installation over bath tub or shower stall with GFCI protected branch circuit. It also meets Washington State Ventilation and Indoor Air Quality Code.

QCF-110 FAN DATA

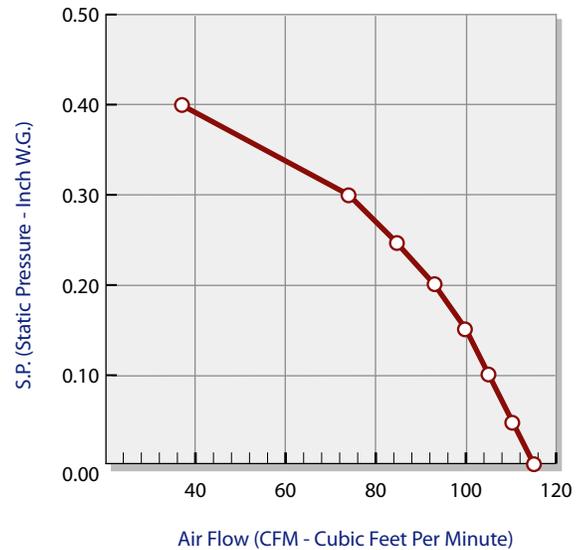

Plastic Backdraft Damper

White High Impact Styrene Grille

Off White Aluminum Louvered Grille

ACCESSORIES

Standard:

- Insulated housing
- Plastic backdraft damper or metal collar with neoprene damper
- Mounting brackets
- Aluminum or styrene grille


Optional:

- Variable speed control
- Aluminum backdraft damper



Reversomatic Manufacturing Ltd.

790 Rowntree Dairy Road, Woodbridge, ON Canada L4L 5V3 • Tel: 905-851-6701 • Fax: 905-851-8376
www.reversomatic.com • info@reversomatic.com

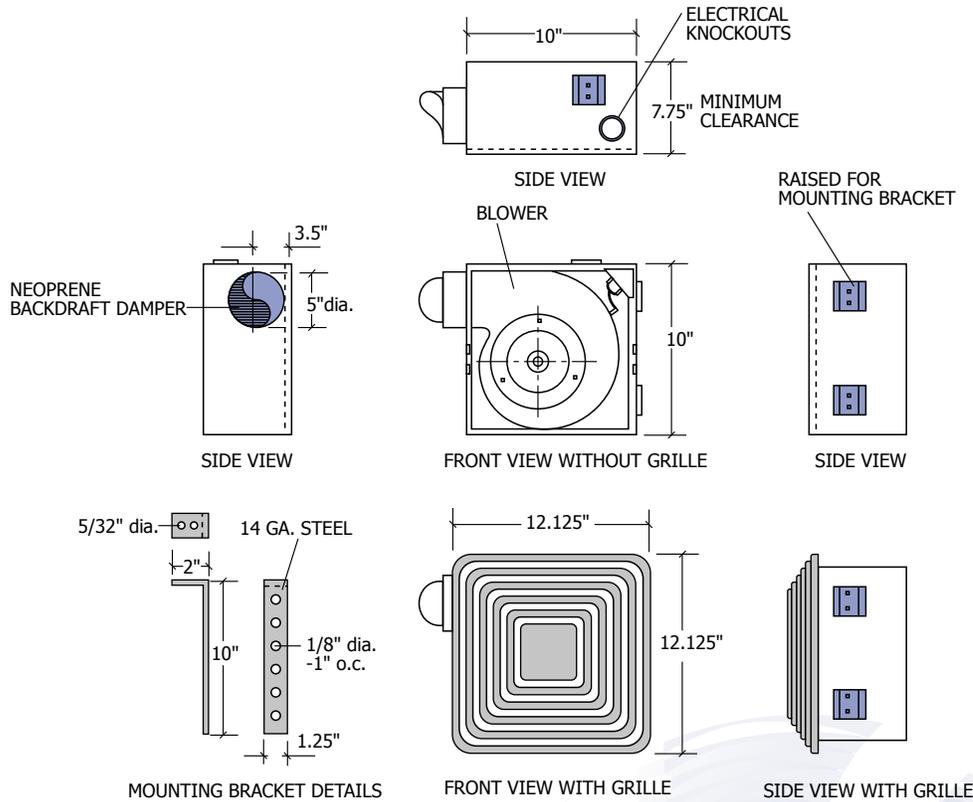

HVI CERTIFIED RATINGS

MODEL	SONES	CFM @ 0.10" S.P.
QCF-110	1.0	100

FAN DATA

MODEL	MOTOR 120 VAC 60 Hz			CUBIC FEET PER MINUTE								
	RPM	AMPS	HP	S.P.	0.00	0.05	0.10	0.15	0.20	0.25	0.30	0.40
QCF-110	1050	0.6	1/90	CFM	115	110	105	100	93	84	74	37

RPM (Revolution Per Minute) shown is nominal and performance is based on actual speed of test. Unit was tested with inlet grille, backdraft damper and outlet duct.

SOUND RATING

OCTAVE BAND	1	2	3	4	5	6	7	8
CENTER FREQUENCY Hz	63	125	250	500	1000	2000	4000	8000
FULL-OCTAVE BAND SOUND PRESSURE LEVEL (dB)	43	47	49	45	44	33	33	24

Contractor:	QCF-110			
Architect:	Job:	Data	Supersedes	Drawing NO.
Engineer:	Date Submitted:			

Reversomatic Manufacturing Ltd.