

TECHNICAL INFORMATION BULLETIN

ELECTRONIC CFL BALLAST

INSTANT START

ORDERING INFORMATION

Order code: 10457
 Description: E1528-347-SL GLB
 Internal code: E1528-347-SL GLB
 UPC: 69549104570

GENERAL INFORMATION

Ballast type: Electronic
 Starting method: Instant Start
 Lamp connection: Series
 Input voltage: 347V
 Input frequency: 50/60HZ
 Status: Active
 Safety approval: 10457STD




Lamp type	Number of lamps	Rated lamp watts	Min. start temp. (°F / °C)	Input current (A)	Input power (ANSI watts)	Ballast factor	Max THD %	Power factor	Max. lamp current crest factor	B.E.F.
2D	1	10	14/-10	0.073	11.91	1.00	6	0.47	1.35	8.40
2D	1	16	14/-10	0.093	15.81	0.92	6	0.49	1.35	5.80
2D	1	21	14/-10	0.098	16.32	0.69	6	0.48	1.35	4.20
2D	1	28	14/-10	0.113	18.82	0.56	6	0.48	1.35	3.00
TTT	1	10	14/-10	0.073	11.91	1.00	6	0.47	1.35	8.40
TTT	1	13	14/-10	0.090	13.74	1.09	6	0.44	1.35	7.90
TTT	1	18	14/-10	0.098	15.30	0.86	6	0.45	1.35	5.60
TTT	1	26	14/-10	0.104	18.04	0.83	6	0.50	1.35	4.60
TTL	1	18	14/-10	0.073	10.89	0.56	6	0.43	1.35	5.10
TTL	1	24	14/-10	0.096	15.32	0.60	6	0.46	1.35	3.90
TT	1	5	14/-10	0.048	6.50	0.95	6	0.39	1.35	14.60
TT	1	7	14/-10	0.059	8.20	1.03	6	0.41	1.35	12.60
TT	1	9	14/-10	0.068	9.91	1.06	6	0.42	1.35	10.70
TT	1	11	14/-10	0.066	9.89	1.20	6	0.43	1.35	12.10
TT	1	13	14/-10	0.066	9.85	0.71	6	0.43	1.35	7.20
T12	1	14	14/-10	0.066	9.30	0.79	6	0.42	1.30	8.50
T12	1	15	14/-10	0.070	10.30	0.79	6	0.42	1.30	7.70
T5	1	4	14/-10	0.040	5.69	1.06	6	0.41	1.35	18.6
T5	1	6	14/-10	0.051	7.61	1.13	6	0.43	1.35	14.8
T5	1	8	14/-10	0.065	9.70	0.79	6	0.43	1.35	8.10
T5	1	13	14/-10	0.092	14.50	1.09	6	0.46	1.35	7.50
T5	1	14	14/-10	0.091	14.53	1.06	6	0.46	1.35	7.30
T5	1	21	14/-10	0.178	19.44	1.06	6	0.51	1.35	5.50
T5	1	28	14/-10	0.145	25.66	1.06	6	0.51	1.35	4.10
T8	1	13	14/-10	0.054	7.60	0.84	6	0.4	1.35	11.10
T8	1	14	14/-10	0.063	9.10	0.84	6	0.42	1.35	9.20
T8	1	15	14/-10	0.069	10.20	0.84	6	0.43	1.35	8.20
T8	1	16	14/-10	0.075	11.40	0.84	6	0.43	1.35	7.40
T8	1	17	14/-10	0.083	12.80	0.97	6	0.45	1.35	7.60
T8	1	18	14/-10	0.075	11.10	0.67	6	0.43	1.35	6.00
T8	1	25	14/-10	0.112	18.60	0.97	6	0.48	1.35	5.20

TECHNICAL INFORMATION BULLETIN

ELECTRONIC CFL BALLAST


INSTANT START

WIRING DIAGRAM

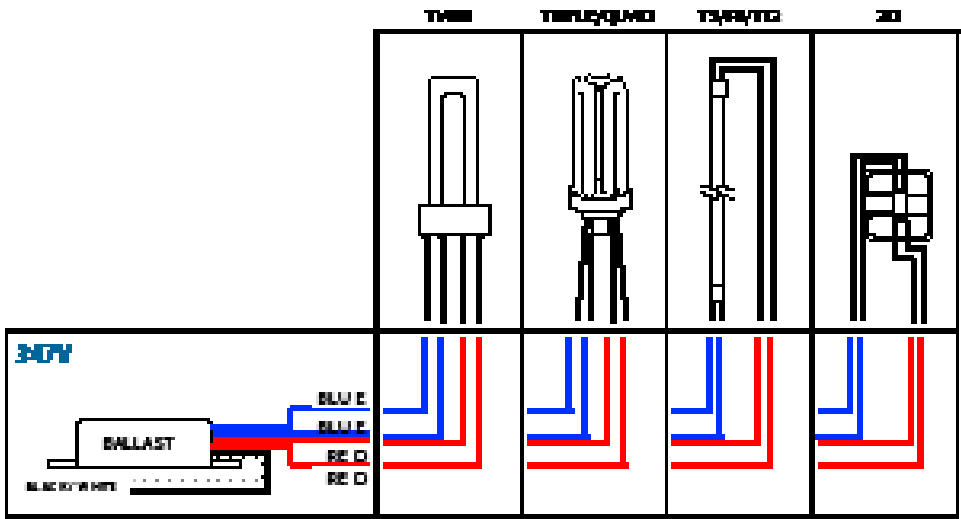

BALLAST FEATURES

A	B	C	D	E	F
2.00 in.	1.50 in.	1.00 in.	0.93 in.	2.88 in.	2.50 in.
5.08 cm	3.91 cm	2.54 cm	2.36 cm	72.1 cm	6.35 cm



WARRANTY:

Ballast warranty of 3 years for matchbox electronic ballast.
For more information visit our website.

Data is based upon tests performed in a controlled environment and representative of relative performance.
Actual performance can vary depending on operating conditions.
Specifications are subject to change without notice.

STANDARD
LEADERS IN LIGHTING

www.standardpro.com