

Location: _____



MFRU

**UNINSULATED FIRE RATED
ACCESS DOOR**

Specification: MIFAB Series MFRU uninsulated fire rated access door is approved by Underwriters Laboratories Inc., for 1 ½ hours, "B" label in walls. The door meets ANSI-UL 10B standards. It has a unique white finish.



STANDARD SIZES (special sizes available upon request)

DOOR SIZE		WALL OPENING		SHIPPING WEIGHT		LAT-CHES
Inches	mm	Inches	mm	lbs.	kg.	
"B" x "A"	"B" x "A"	Inches	mm	lbs.	kg.	
8 x 8	203 x 203	8 1/2 x 8 1/2	216 x 216	10.0	4.5	1
10 x 10	254 x 254	10 1/2 x 10 1/2	267 x 267	12.0	5.4	1
12 x 12	305 x 305	12 1/2 x 12 1/2	318 x 318	14.0	6.3	1
12 x 18	305 x 457	12 1/2 x 18 1/2	318 x 470	16.0	7.2	1
12 x 24	305 x 610	12 1/2 x 24 1/2	318 x 622	19.0	8.6	1
14 x 14	356 x 356	14 1/2 x 14 1/2	368 x 368	15.5	7.0	1
16 x 16	406 x 406	16 1/2 x 16 1/2	419 x 419	16.5	7.5	1
18 x 18	457 x 457	18 1/2 x 18 1/2	470 x 470	19.0	8.6	1
20 x 20	508 x 508	20 1/2 x 20 1/2	521 x 521	24.0	10.9	1
22 x 22	559 x 559	22 1/2 x 22 1/2	571 x 571	28.0	12.7	1
22 x 30	559 x 762	22 1/2 x 30 1/2	571 x 775	35.0	15.9	1
24 x 24	610 x 610	24 1/2 x 24 1/2	622 x 622	30.0	13.6	1
24 x 36	610 x 914	24 1/2 x 36 1/2	622 x 927	46.0	20.9	2
24 x 48	610 x 1219	24 1/2 x 48 1/2	622 x 1232	65.0	29.5	2
30 x 30	762 x 762	30 1/2 x 30 1/2	775 x 775	45.0	20.4	1
32 x 32	813 x 813	32 1/2 x 32 1/2	826 x 826	47.0	21.3	1
36 x 36	914 x 914	36 1/2 x 36 1/2	927 x 927	60.0	27.2	2
36 x 48	914 x 1219	36 1/2 x 48 1/2	927 x 1232	80.0	36.3	2

Material: MFRU Series is 16 gage satincoat steel door and frame. The MFRU-SS stainless steel Series is 16 gage #304 stainless steel door and frame.

Finish: Satincoat steel doors have a primed white finish. Stainless steel doors have a #4 brush satin finish.

Door: Flush to frame. Self-closing. Can be opened from the inside or back of the door with MIFAB's unique thumb turn latch.

Frame: Four piece welded frame with masonry mounting straps.

Hinge: Concealed pivot pins.

Spring: Heavy duty.

Latch: Standard - Flush mounted, interchangeable turn ring operator and key operator latch. Optional - cylinder key lock. All of MIFAB's cylinder key locks are keyed alike.

Fire Rating: Underwriters Laboratories "B" label. 1 ½ hours for walls.

Insulation: Not required.

Packaging: One door per carton.


SUFFIX OPTIONAL VARIATIONS:

- C Cylinder key lock
- SS Type #304 Stainless steel door & frame

A-B Door Size

C-D Overall Dimensions - Door Size - Plus 2 5/8" (67)

E Wall Opening - Door Size - Plus 1/2" (13) (Allow an extra 1/4" (6) clearance for latch housing on "D" side).

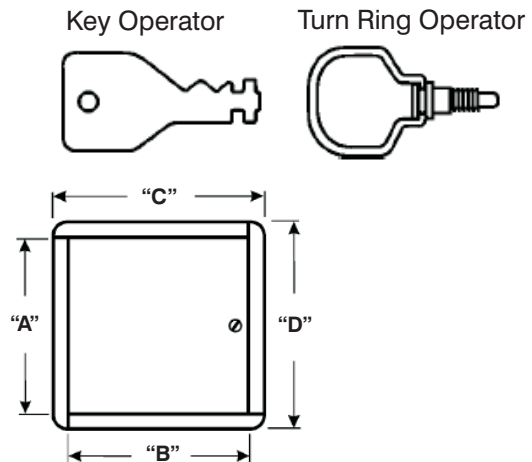

(Dimension) Denotes Millimetres

Note: The hinge is always furnished on the "A" or height (longer) dimension, unless otherwise specified.

Job Name: _____
Section No: _____
Schedule No: _____

Page No: _____
Contractor: _____
Purchase Order No: _____

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880