




WALLMOUNT KITCHEN FAUCETS


COMPLIES WITH:




ASME A112.18.1 / CSA B125.1




27W650



27W660



27W670

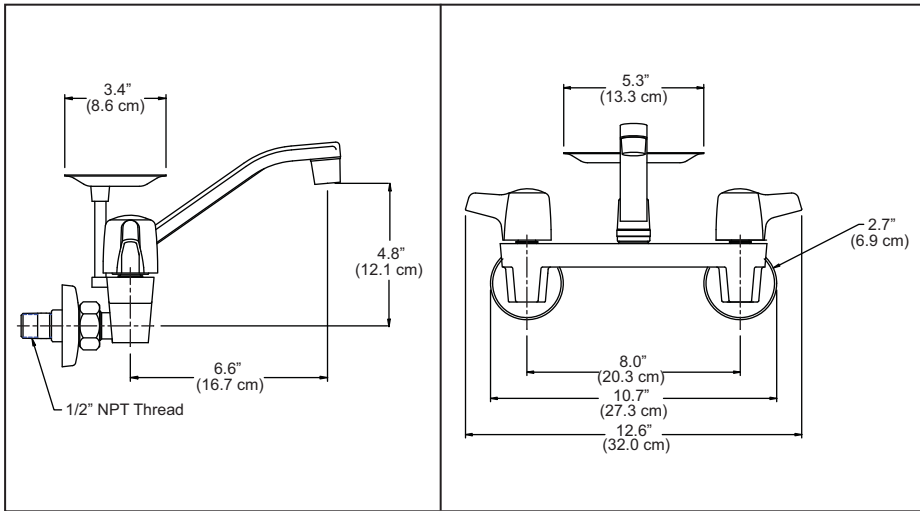

Suggested Specifications

- Two handle kitchen faucet for exposed wall mounting.
- 20.3 cm (8") centre.
- 16.7 cm (6.6") swing spout.
- 5.08 cm (2") lever type handles.
- Control mechanism shall be of the rotating compression type used with replaceable chrome-plated brass seats.
- All exposed metal surfaces shall be chrome-plated.


Features	Model 27W650	Model 27W660	Model 27W670
Compression	X	X	X
Soap Dish	X		
Spout	X	X	
Lever Handles	X	X	X

Aerator

- Flow restricting, 8.3 litres per minute maximum (2.2 gpm), chrome plated brass housing.

Brass Stem - Compression

1	Acme threads engaged at all times for long life Lubrication lasts and water is sealed out
2	Buna N Nitrile Radial Seal "O" ring
3	Buna N Nitrile seat washer
4	Stainless steel screw
5	Nickel chrome-plated renewable brass seats




DELTA FAUCET CANADA
(a division of Masco Canada Limited)
420 Burbrook Place
London, Ontario N6A 4L6
www.deltafaucet.com

ROBINETS DE CUISINE MONTÉS AU MUR


CONFORMES AUX NORMES SUIVANTES :




ASME A112.18.1 / CSA B125.1




27W650



27W660



27W670

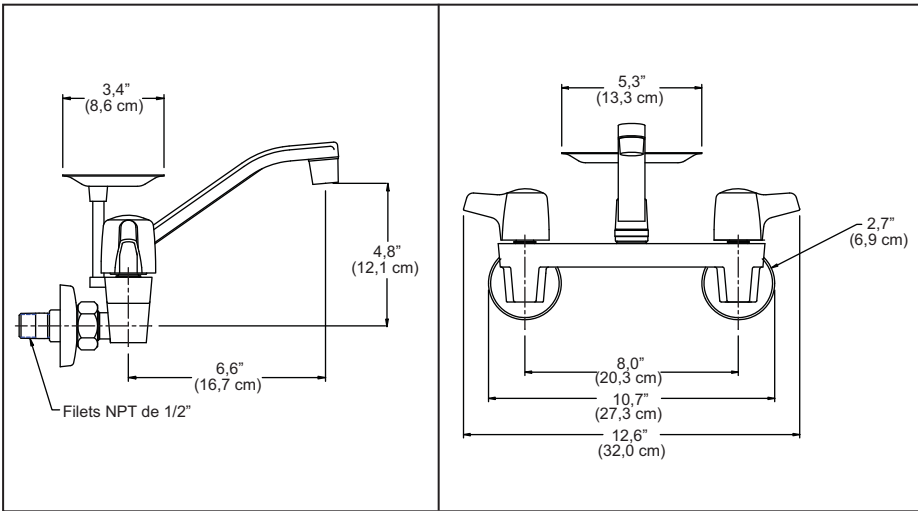

Spécifications suggérées

- Robinet de cuisine à une manette pour l'installation exposée au mur.
- Entraxe de 20,3 cm (8 po).
- Bec pivotant de 16,7 cm (6,6 po).
- Manettes à levier de 5,08 cm (2 po).
- Le mécanisme de commande doit être du type rotatif à compression utilisé avec des sièges remplaçables en laiton chromés.
- Toutes les surfaces métalliques exposées doivent être chromées.

Caractéristiques	Modèle 27W650	Modèle 27W660	Modèle 27W670
À compression	X	X	X
Savonnier	X		
Bec	X	X	
Manettes à levier	X	X	X

Aérateur

- Boîtier en laiton chromé, à restriction de débit, d'un débit de 8,3 litres à la minute (2,2 gal.min).

Tige en laiton - à compression

1	Les filets Acme sont engagés à tout moment pour assurer une longue durée de vie. La lubrification dure longtemps et les joints sont rendus étanches à l'eau.
2	Joint torique d'étanchéité radial Buna N Nitrile
3	Rondelle de siège Buna N Nitrile
4	Vis en acier inoxydable
5	Sièges remplaçables en laiton nickelé-chromé

