

Suggested Specifications

27W411

Two handle deck faucets with 4" centres and 6" swing spout. Valve mechanisms shall be of the rotating compression type. Hot and cold stem units shall be interchangeable. All operating parts must be replaceable from above the deck. Valves shall be used with replaceable chrome-plated brass seats. All exposed metal surfaces are to be chrome-plated.

Aerator: flow restricting, 8.3 litres per minute maximum, chrome-plated brass housing

29W211; 29W221

As **27W411** with removeable spout end 1/2" NHC hose adaptor and trap seal primer

29W521

Two handle concealed automatic washer faucet with 6" centres. Valve mechanisms shall be of the rotating compression type. Hot and cold stem units shall be interchangeable. All operating parts must be replaceable from outside the wall. Valves shall be used with replaceable chrome-plated brass seats. All exposed metal surfaces are to be chrome-plated.

29W721

As **29W521** but with anti-water hammer outlets

29W621

As **29W521** but with cover plate for exposed mounting



29W813

Two handle laundry tray for exposed mounting. 3-3/8" inlet line centres and 6" swing spout with removeable 3/4" NHC hose adaptor to reveal a standard 55/64" – 27" aerator thread. Valve mechanisms shall be of the rotating compression type. Hot and cold cartridges must be replaceable. Cold side stem will rotate counter clockwise (utilizes 96101 structure). All operating parts must be replaceable from the installed position. Valves are outfitted with chrome-plated brass renewable seats. All exposed surfaces are natural, mill finished brass.


29W713

As **29W813** less mounting bracket


27W411

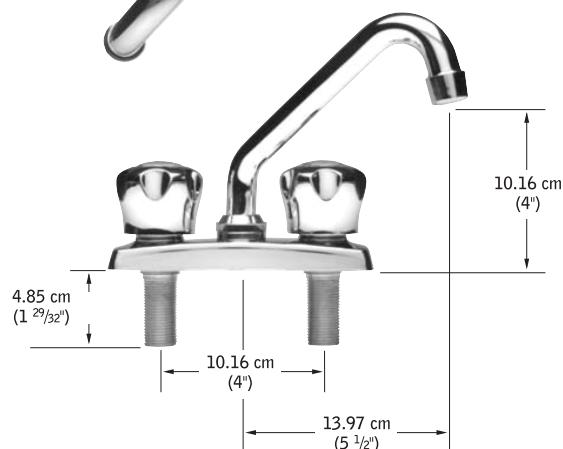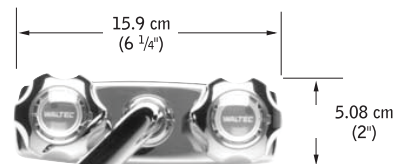

29W813

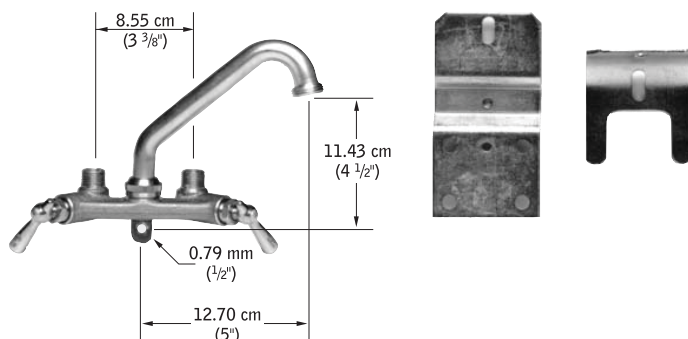

29W721

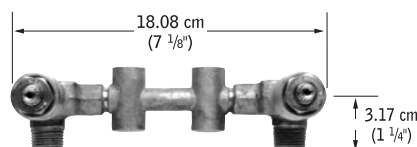

Note: • 5/16" female hex drive removeable seat
• 13/16" across flat wrench size of cartridge