

Below Deckmount Sink Faucets 8" Centers

TECK®
COMMERCIAL



Specification: (example)

- Below deckmount sink faucet
 - 203mm (8") centers, two handle
 - Polished chrome plated finish trim
 - CAST BRASS** bodies
 - BRASS** swing spout or 3/8" IPS **BRASS PIPE** Rigid/Swivel Gooseneck Spout
 - Metal hold-down package
 - Color indexed metal handles with vandal resistant screws
 - CER-TECK®** 1/4 turn ceramic structures)
- and ... with ... Hose, Spray and Diverter (if applicable)
 with ... (add spout required)
 with ... (add outlet required)
 with ... (add handle required)
 with ... (add suffix **-LS** if required – See Back Page)
 with ... (add suffix **-TI** if required – See Back Page)

27C2144

27C2944



Engineer/Architect Approval














Model Specified:

Approval:

Date:

DESCRIPTION	PRODUCT NO.			
WITH hose and spray	27C1			
LESS hose and spray	27C2			



SPOUT		OUTLET		HANDLE	
	✓		✓		✓
0	<input type="checkbox"/>	0	<input type="checkbox"/>	0	<input type="checkbox"/>
1 203mm (8") Wallform (S2) Swing Spout (2) 	<input type="checkbox"/>	1	<input type="checkbox"/>	1 Five Flute Handles 	<input type="checkbox"/>
2 203mm (8") Tubular (S5) Swing Spout (2) 	<input type="checkbox"/>	2 Vandal Resistant 1.5 USGPM (5.7 L/min.) Laminar w/Antimicrobial By Agion® 	<input type="checkbox"/>	2 102mm (4") Hooded Blade Handles (5) 	<input type="checkbox"/>
3	<input type="checkbox"/>	3 Vandal Resistant 1.5 USGPM (5.7 L/min.) Flow Control Aerator 	<input type="checkbox"/>	3 76mm (3") Lever Blade Handles (5) 	<input type="checkbox"/>
4	<input type="checkbox"/>	4 Standard 1.5 USGPM (5.7 L/min.) Flow Control Aerator 	<input type="checkbox"/>	4 102mm (4") Blade Handles, Sanitary Hoods(5) 	<input type="checkbox"/>
5	<input type="checkbox"/>	5 Vandal Resistant Non-Aerating Spray Outlet 0.5 USGPM (1.9 L/min.) 	<input type="checkbox"/>	5 152mm (6") Wrist Handles, Sanitary Hoods 	<input type="checkbox"/>
6	<input type="checkbox"/>	6	<input type="checkbox"/>	6	<input type="checkbox"/>
7	<input type="checkbox"/>	7 Smooth End, Laminar Flow Control in Base of Gooseneck Spout 1.1 USGPM (4.2 L/min.) (3) 	<input type="checkbox"/>	7	<input type="checkbox"/>
8	<input type="checkbox"/>	8	<input type="checkbox"/>	8	<input type="checkbox"/>
9 Heavy Duty 152mm (6") Bend Rigid/Swivel (R4) Gooseneck Spout (1) (4) 	<input type="checkbox"/>	9	<input type="checkbox"/>	9	<input type="checkbox"/>

(1) Available **Optional Rigid/Swivel Spouts**. These spouts can ONLY be added to **SPOUT Option No. 9**. Note: Use this page front and back as a product submittal sheet. Flow Rates are at 60 PSI.
 (2) Available **Optional Swing Spouts**. These spouts can ONLY be added to **SPOUT Option No. 2**. Refer to www.specselect.com for individual models.
 (3) This outlet can ONLY be added to **SPOUT Option No. 9**. (4) 120° Limited Swing Spout available. Add Suffix **-LS**. (5) H/C Temperature Indicator Available. Add Suffix **-TI**.

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.


CDSP-27C12 Rev. A

Approvals:


- CSA certified
- Complies to ASME A112.18.1
- Lever Blade Handles No. 2, 3, 4, and 5, ADA Compliant and meet Handicapped Accessibility Standard ASME A117.1 of less than 5 lbs. operating force.
(Contact Delta Representative for State and/or Local Approvals.)

HANDLE TEMPERATURE INDICATORS

- ☐ Add suffix **"-TI"** to Product Number for handle temperature indicators "H" (red), "C" (blue).
Available on handle options 2, 3 or 4 only.



FLOW RATE vs PRESSURE

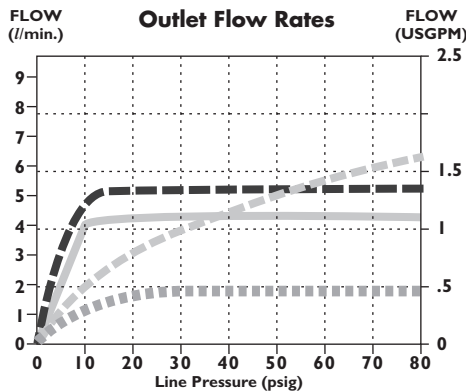

OUTLET NO.	"D"
	mm in.
2	18 0.69
3	18 0.69
4	17 0.67
5	18 0.69

LIMITED SWING GOOSENECK

- ☐ Add suffix **"-LS"** to Product Number for 120° Limited Swing

GOOSENECK SPOUT ASSEMBLIES


SPOUT/OUTLET	"A"	"C"	"L"
	mm in.	mm in.	mm in.
Gooseneck-Standard (R4) for outlets #2, 3, 4 & 5	152 6	124 4.9	146 5.8
Gooseneck-Standard (R4) for outlet #7	152 6	117 4.6	152 6.0

INLETS - 1/2" MIP/Coupling Nuts


Note: Measurements may vary ± 6 mm (0.25")

FRONT VIEW

(Extension Kit Available for up to 1 1/4" Thick Decks)

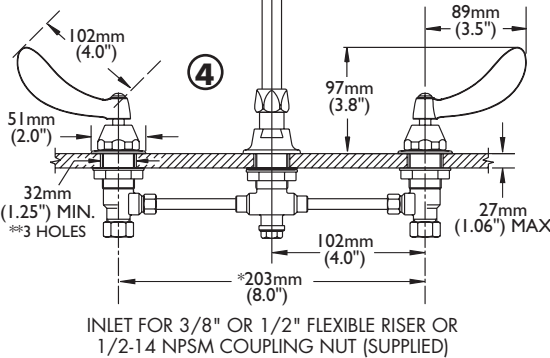

SWING SPOUT

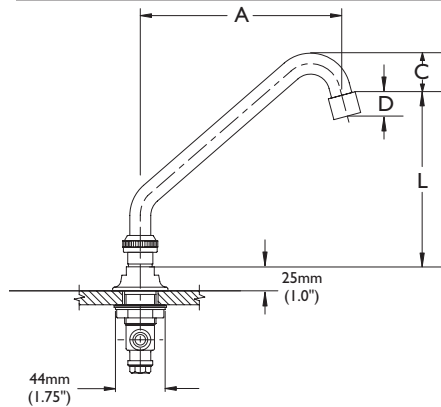


FOR OPTIONAL RIGID/SWIVEL & LIMITED SWING SPOUTS

See **DSP-R/S** for detailed specification (Found in the "Add-On Option" section when using the printed spec binder)

FOR OPTIONAL SWING SPOUTS

See **DSP-S/S** for detailed specification (Found in the "Add-On Option" section when using the printed spec binder)


SPRAY



GOOSENECK SPOUT

Outlets #2, 3, 4 & 5

Outlet #7

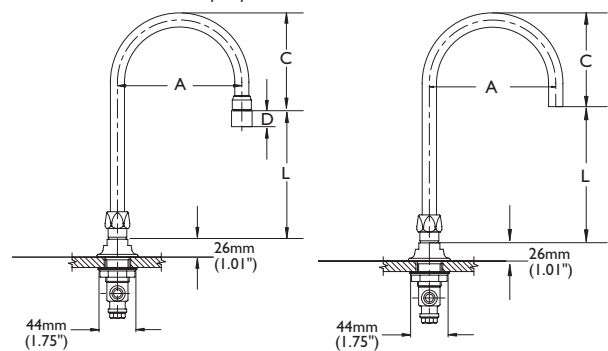

SWING SPOUT ASSEMBLIES

SPOUT NO.	SPOUT TYPE	"A"	"C"	"L"
		mm in.	mm in.	mm in.
1	8" Wallform Spout (S2)	206 8.1	15 0.6	130 5.1
2	8" Tubular Spout (S5)	185 7.3	41 1.6	147 5.8