

AquaSense® TAG

Z6913

AquaSense Battery Powered Faucet



Shown with -CP4 option

Flow Control Options

- □ -F 0.5 gpm/1.9 Lpm Vandal-Resistant Non-Aerated
- □ -J 1.5 gpm/ 5.7 Lpm Vandal-Resistant Laminar Flow
- □ -K 1.0 gpm/ 3.8 Lpm Vandal-Resistant Laminar Flow
- □ -L 1.0 gpm/ 3.8 Lpm Vandal-Resistant Aerator
- □ -M 0.35 gpm/1.3 Lpm Vandal-Resistant Non-Aerated

Power Supply Choices (Sold Separately)

□ -ACA 6 VDC Plug-In Power Converter
□ -HW6 Hardwired Power Converter

Optional Power Supply Accessories

□ -CWB Connector Wire for Hardwire Install

□ -MJ Mini Junction Box

NOTE: For Hardwire applications furnish P6000-HW6 power converter. Order P6000-HW6 power converter seperately.

The P6000-HW6 and P6000-MJ will power up to 8 sensor faucets.

The information contained in this document is subject to change without notice. Please contact Zurn for most up to date information.

ZURN INDUSTRIES, LLC. ◆ COMMERCIAL BRASS OPERATION 5900 ELWIN BUCHANAN DRIVE ◆ SANFORD NC 27330 Phone: 1-800-997-3876 ◆ Fax: 919-775-3541 www.zum.com

In Canada: ZURN INDUSTRIES LIMITED

3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2
Phone: 905-405-8272 Fax: 905-405-1292

Engineering Specification

ADA compliant, battery powered, chrome plated sensor faucet for retrofit and new construction.

- Flow Rate
 - 1.5 gpm Vandal Resistant Aerator
- Occupant Detection

Infrared convergence-type proximity sensor Thirty Second Time out feature

> Spout module

Chrome Plated Cast Brass

Also Includes

 In-line filter
 4 "AA" batteries
 Inlet for a 1/2"[13] ball riser
 Single supply hose

* Option not available for -XL faucets

Accessories

□ -ADM	Above Deck Mixer *
□ -ADM-1	Above Deck Mixer w/4" Cover Plate *
□ -ADM-2	Above Deck Mixer w/8" Cover Plate *
□ -CG	CareGuard Aerator
□ -CP4	Cover Plate 4"[102] Centers
□ -CP8	Cover Plate 8"[203] Centers
□ -DSA	Drug Screening Applications
□ -H4	Wrist Blade Handle for ADM *
□ -MT	Mixing Tee *
□ -MV	Temperature Mixing Valve
□ -SH	Supply Hoses for Mixing Valve
□ -TMV	Thermostatic Mixing Valve for Multiple
	Faucets
□ -TMV-1	Thermostatic Mixing Valve for Single
	Faucets
□ -	Other


Careguard currently only available with -E, 1.5 Vandal Resistant Laminar Aerator.

□ -XL Zurn Lead Compliant products (-XL) are manufactured to comply with state laws and local codes that mandate lead content levels less than one quarter of one percent (0.25%) total lead content by weighted average.

Architectural/Engineering Approval

TYPICAL Z6913


AquaSense Battery Powered Faucet

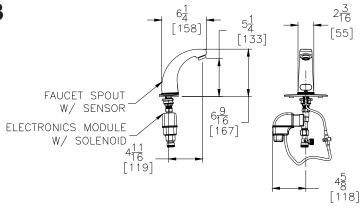

Optional Mixing Valves 3/8 COPPER TUBE (BY OTHERS) BRASS MIXING TEE BRASS FERRULE FILTER HOUSING P6900-MT Mixing Tee P6900-MV Temperature Mixing Valve

TYPICAL Z6913-ACA

AquaSense Plug-In Powered Faucet



TYPICAL Z6913-CWB


AquaSense Hardwire

Powered Faucet

Optional:

* Optional -MJ mini junction box for connecting up to 8 faucets

NOTE: MUST USE EITHER ZURN P6000-HW6 HARDWIRE POWER CONVERTER OR ZURN P6000-ACA PLUG-IN POWER CONVERTER TO ENSURE PROPER OPERATION. USING A POWER CONVERTER OTHER THAN ZURN MAY RESULT IN OPERATION MALFUNCTION OR UNIT FAILURE.

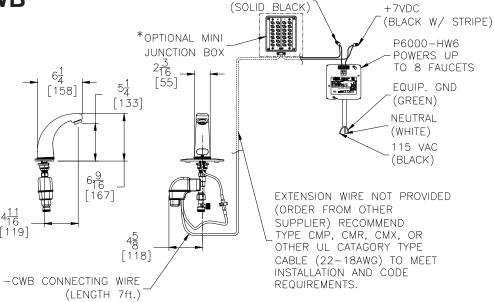

DC COMMON (GND)