

Specifications

FAUCET DESCRIPTION

- Solid brass body with chrome plated or Lifeshine polished brass finish.
- · Elegant styling
- 4" centersét

OPERATION

- Adjustable infrared sensor (range, turn off delay and obstruction delay)
- Temperature controlled by mixing valve or mixing tee (optional)
- Battery powered (AC optional)

FLOW

 Supplied with vandal resistant 0.5 gpm (1.9 L/min) aerator (with key)

VALVES


- In-line filter included
- Slow close solenoid valve

STANDARDS

 Third party certified by IAPMO and CSA to meet ASME A112.18.1M and all applicable specifications referenced therein and complies with the requirements of ANSI A117.1

WARRANTY

5 year warranty




Deck-Mount (4" Center), Non-Mixing, Battery Powered Electronic Faucet

Models: 8301, 8301P*

* Discontinued

NOTE: DESIGNED TO BE INSTALLED THROUGH 3 HOLES 1" MIN. DIA. 2" ON CENTER

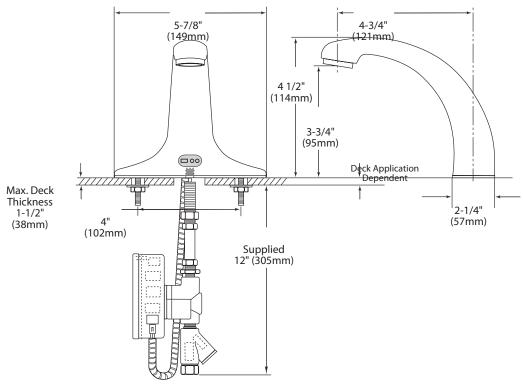

CRITICAL DIMENSIONS

(DO NOT SCALE)

MOEN SPECIFIER SERVICES 1-800-321-8809 Ext. 2158 www.moen.com