


Polished chrome plated flush valve, chloramine resistant diaphragm, 1.0 gallons per flush, externally adjustable for water conservation, with $\frac{3}{4}$ " vandle resistant capped screwdriver angle stop with back-check, renewable main valve seat, metal "Rubberflex" oscillating handle, "Turn-to-Silence" equipment, with "Kwikfit" threaded union tailpiece, vacuum breaker, wall flange, spud nut and spud flange for $\frac{3}{4}$ " top spud.

Variations

- ☐ C – 3" Oscillating disc
- ☐ L – Handle or push-button on front of valve
- ☐ T6 – Heavy cast wall flange with allen head set screw
- ☐ T36 – Solid ring wall support for flush connection
- ☐ T42 – Sweat adapter kit for stop
- ☐ T46 – Split ring wall support for flush connection

Remarks

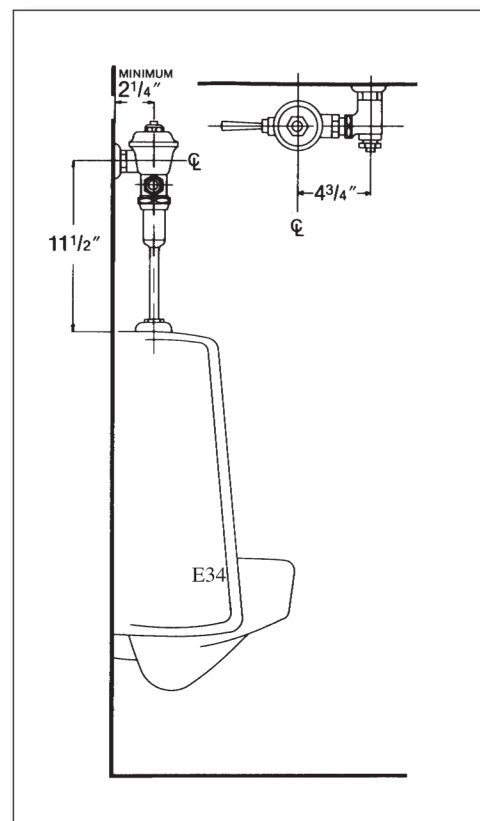

P.O. Box 411 • Charlottesville • VA • 22902 • USA
 Phone: (434) 296-0166 • Fax (434) 977-3596
 Email: info@delanyproducts.com
 Web: www.delanyproducts.com
 ©2012

