

Electronic Exposed TECK® Flush Valves

**TECK®
COMMERCIAL**



81T201HWA

Exposed Hardwire Operated 1-1/2" Top Inlet Closet Fixture

- Polished chrome plated vandal resistant metal cover with top mounted sensor operated **H₂OPTICS®** electronics
- Right or left-hand supply installation
- ADA compliant, automatic operation hardwire powered infrared sensor
- Scratch resistant replaceable lens window
- Infrared sensor range adjustment of 610mm-1067mm (24" - 42"), factory set at 34" (±2")
- Hardwire adaptor 24VAC to 6VDC converter (supplied)
- Vandal resistant copper tube conduit
- Optional 24 hour automatic flush factory set to OFF, 3 second flush delay
- Set-up sensor range adjustment indicator lights
- 24 VAC input, 8 second arming delay
- Electronic operated non-hold-open **metal** manual override button with 5 second lockout
- (110 to 24 VAC Transformer not included. See selection below for additional part number.)
- Quiet action, TECK® exposed diaphragm flush valve
- Chloramine resistant diaphragm
- Forged brass diaphragm retainer
- Renewable seat
- Polished chrome plated finish
- External water conserving flush adjustment**, factory set at 60 PSI to 6 litre (1.6 gal.) (except -48 and -6 models)
- 1" FIP/Copper sweat inlet adaptor**, angle check stop with protecting cap
- Adjustable 121mm (4-3/4") plus or minus 11mm (7/16") inlet/valve outlet centers
- Vacuum breaker
- Cover tube, stainless steel wall flange, spud flange, concealed spud nut, and 292mm (11-1/2") outlet tube

81T201HWA-6

Same as 81T201HWA, but **Not Field Adjustable**

81T201HWA-48

Same as 81T201HWA, but factory set at 60 PSI to 4.8 litre (1.27 gal.), **Not Field Adjustable**

81T221HWA

Same as 81T201HWA, but with 610 mm (24") outlet tube.

81T221HWA-6

Same as 81T221HWA, but **Not Field Adjustable**

81T221HWA-48

Same as 81T221HWA, but factory set at 60 PSI to 4.8 litre (1.27 gal.), **Not Field Adjustable**

Approvals:

- IAPMO listed to CSA B125.3/ASSE 1037
 - ADA Compliant and meets Handicapped Accessibility Standard ICC/ANSI A117.1 of less than 5 lbs. operating force.
- (Contact Delta Representative for State and/or Local Approvals.)
U.S. Patent # 6, 826, 455
Other Patents Pending



Engineer/Architect Approval

Model Specified:

Approval:

Date:



81T201HWA

Electronic Exposed TECK® II Flush Valve Retrofit Kits

81T201HWA-20

Same as 81T201HWA, but LESS stop, cover tube and wall flange

81T201HWA-20-6

Same as 81T201HWA-20, but **Not Field Adjustable**

81T201HWA-20-13

Same as 81T201HWA-20, but factory set at 60 PSI to 13 litre (3.4 gal.)


81T201HWA-20-48

Same as 81T201HWA-20 but factory set at 60 PSI to 4.8 litre (1.27 gal.), **Not Field Adjustable**

HARDWIRE WITH BATTERY BACKUP

Add suffix "**BB**" to Product Number. See **DSP-BB** for detailed specification (found in "Add-On Option" section when using printed spec binder).

✓	TRANSFORMERS:	
	060704A	110 to 24VAC Class II 20VA (for up to 5 Electronic Valves)
	060771A	110 to 24VAC Class II 40VA (up to 10 Electronic Valves)
	060772A	110 to 24VAC Class II 100VA (up to 25 Electronic Valves)

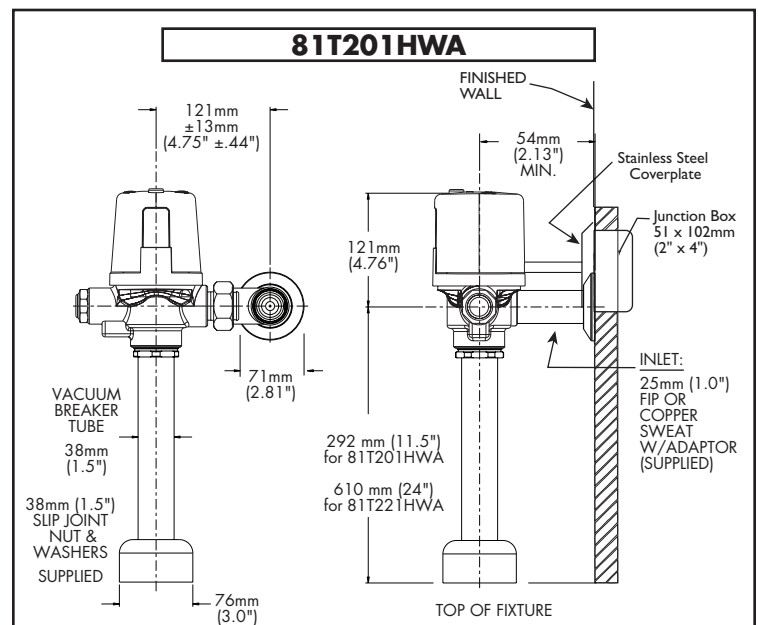

Note: For high and low pressure applications, please see page FEA-81T High Water Pressure note for more details.
Verify flow requirements with bowl manufacturer.

Note: Measurements may vary ± 6mm (0.25")

Refer to www.specselect.com for individual models.

Note: Use this page as a product submittal sheet.