

SharkBite® Check Valve

DESCRIPTION

The Cash Acme SharkBite® Check Valve is a general purpose spring Check Valve that prevents the reverse flow of water. The SharkBite® Check Valve can be installed horizontally and vertically and can be connected in seconds to copper tubing, and CTS CPVC and Pex.


FEATURES AND BENEFITS

Instant push-fit connections for increase ease of use:

No soldering, clamps, unions, or glue required.

Designed for vertical and horizontal installation:

Flexible installation options in new or existing plumbing systems.

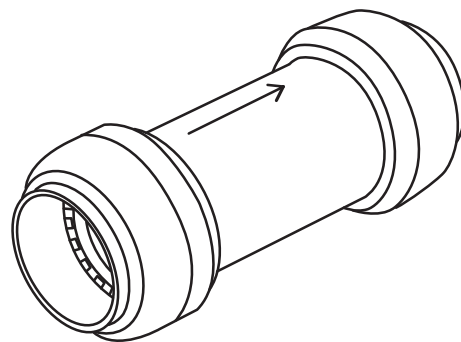

SPECIFICATION DATA

Performance:

Maximum pressure 200 psi

Maximum temperature 150°F (65°C) (water)

Service Water

Materials:

Body Brass


O-ring EPDM

Cartridge & demount ring. Acetal

Protection ring Nylon

Grab ring Stainless steel

Tube Support Liner. Polysulfone

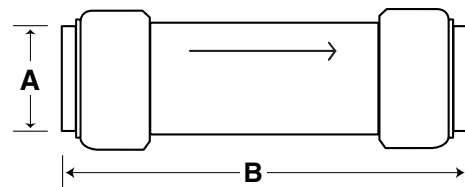

Dimensions	A [mm]	B [mm]
1/2" (U2008-0000)	1/2" [12.7]	2.66" [67.6]
3/4" (U2016-0000)	3/4" [19.05]	3.26" [82.8]
1" (U2020-0000)	1" [25.4]	3.88" [98.4]

CONNECTIONS

SharkBite® 1/2" through 1"