




INTRODUCING SLOAN'S

Side Mount Operator



**For Water
Closets and
Urinals**

EBV-89A-M (Shown)

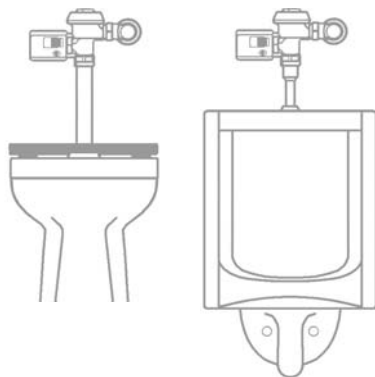

Sloan Valve Company, the leader of electronic plumbing fixtures, introduces their new *Side Mount Operator* – a side-mount-operated electronic flushing product for exposed diaphragm-style water closets and urinals.

Sloan's *Side Mount Operator* gives you these extra features:

- Programmable automatic flushing systems
- Sensor-operated for touch-free performance
- Tempered Glass lens
- Adjustable infrared sensing
- Low battery light notification
- Courtesy flush button
- Chrome metal cover for easy cleaning
- Standard "C" batteries supplied

And benefits:

- Money savings – two-minute installation
- Time savings – no water shut off required for installation
- Improved hygiene
- Fixtures stay cleaner
- Quick battery replacement – no need to shut off water
- Helps eliminate odors
- Increased water savings with electronics
- ADA compliant

Competitively priced, Sloan's *Side Mount Operator* opens a new market for you and your customers who require side-mounted electronic flushing products.

Wherever there's a Flushometer – there's a place for Sloan's new *Side Mount Operator*. See flip side for more information.

SLOAN'S

Side Mount Operator

Perfect for Sloan's line up of diaphragm Flushometers...

ROYAL®, REGAL PRO® and REGAL®

Easily converts your manual Flushometer to modern water-saving electronics.

The EBV-89A offers a wide range of operation switches from normal, to water saver, to sanitary and stadium flush. The EBV-89A comes with a courtesy flush button and features an audio signal when batteries need to be replaced.

Metal Cover	Code Number
EBV-89A-M for Water Closets, Urinals	0325105


Plastic Cover	Code Number
EBV-89A-P for Water Closets, Urinals	0325108

Note: For purposes of obtaining quantity pricing you can mix or match plastic and metal.

Easy Installation

For Water Closets and Urinals

No water shut-off required, simply remove existing handle using the supplied wrench, place collar gasket into collar nut and place the unit on the Flushometer and tighten. Use the Allen wrench to remove battery compartment, insert supplied batteries and retighten – you're finished.

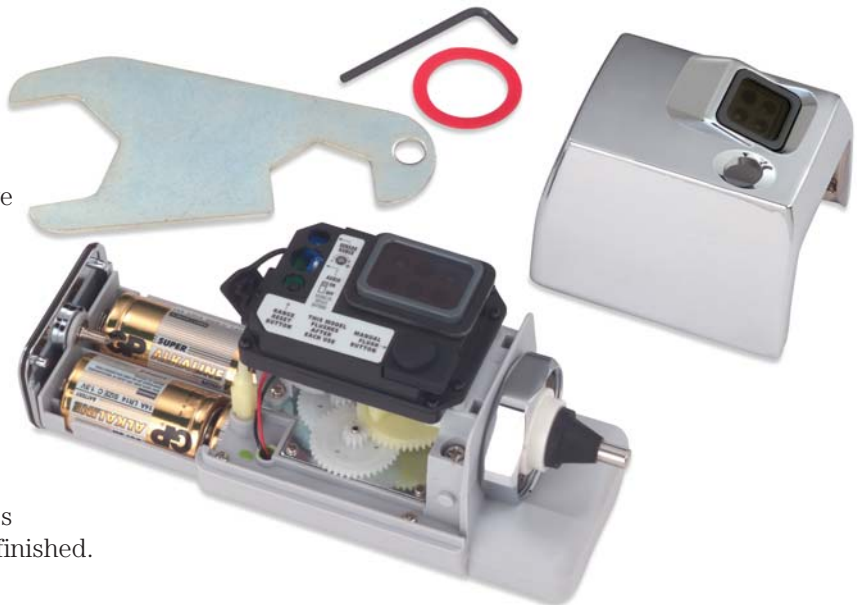

Operation

The unit will flash during its 7 minute start-up sequence. Thereafter, the LED will flash only 3 times after a 5-second delay to prevent needless flushes – another efficient way to save water.

Sloan...making electronic conversion easy.

SLOAN®

Sloan Valve Company
10500 Seymour Avenue
Franklin Park, IL 60131
800-9-VALVE-9 (800-982-5839)
FAX 847-671-6944
www.sloanvalve.com

©2008 by Sloan Valve Company
Printed in the U.S.A. SLV6296.2