


Taymor

## 06-4682P / 06-4682PSN BATHROOM FAUCET

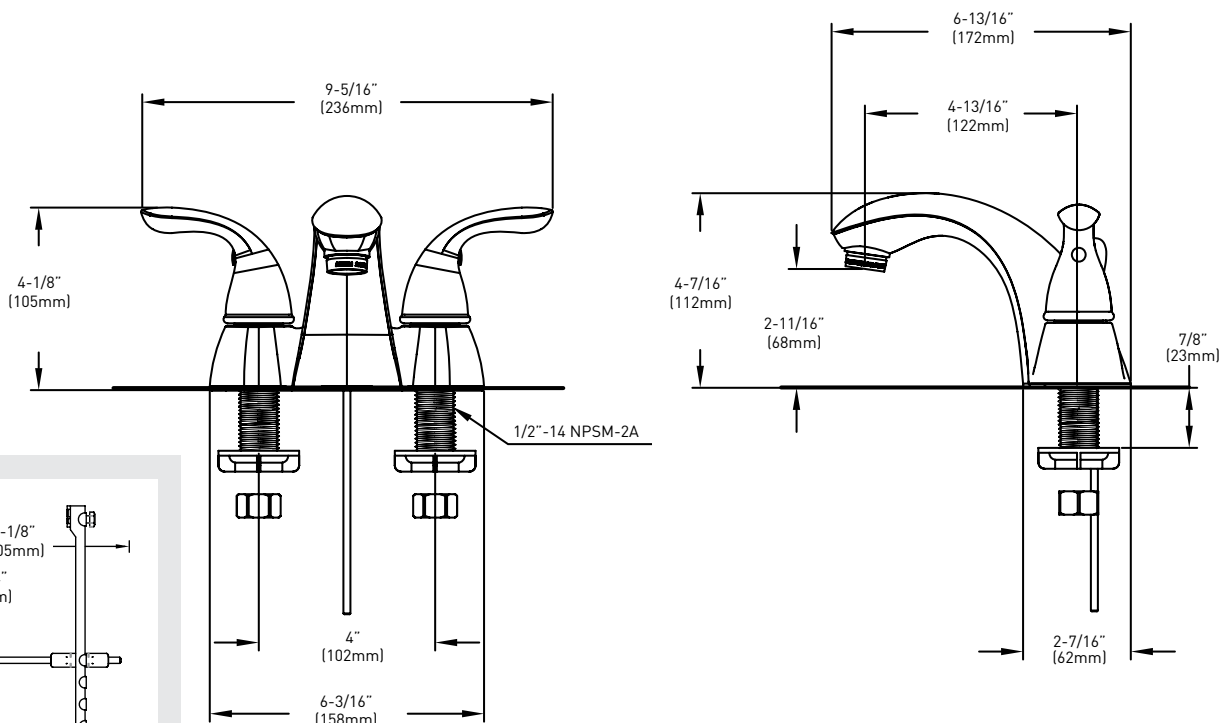

ABS POP-UP DRAIN

CRITICAL DIMENSIONS NOT TO SCALE

### CONSTRUCTION

- METAL CONSTRUCTION WITH VARIOUS FINISHES IDENTIFIED BY SUFFIX
- BRASS VALVE BODIES

### MOUNTING

- DESIGNED TO INSTALL THROUGH 3 HOLES, 13/16" [21mm] MIN. DIA. WITH 4" [102mm] CENTERS, ON DECKS UP TO 7/8" [23mm]
- DESIGNED TO INSTALL MIN. 1-5/8" [42mm] FROM VALVE CENTERLINE TO BACK SPLASH

### INLET

- 1/2"-14 NPSM THREADED MALE INLET SHANKS

### OPERATION

- QUARTER-TURN LEVER STYLE HANDLES
- OPERATES WITH LESS THAN 5 LBS. OF FORCE

### WATER-CONTROL MECHANISM

- CARTRIDGE
- CERAMIC DISC VALVES

### FLOW

- AERATOR LIMITS MAXIMUM FLOW RATE TO 2.2 GPM MAX. [8.3 L/MIN.] @ 60 PS

### CODES/STANDARDS APPLICABLE

- ASME A112.18.1/ CSA B125.1
- ANSI/NSF 61/9

### GUARANTEE

- LIMITED LIFETIME GUARANTEE AGAINST DEFECTS IN MATERIAL AND WORKMANSHIP TO ORIGINAL CONSUMER PURCHASER
- 5 YEAR WARRANTY IF USED IN INDUSTRIAL, COMMERCIAL AND BUSINESS INSTALLATIONS



DESCRIPTION	POLISHED CHROME	PVD SATIN NICKEL	CASE PACK
TWO LEVER HANDLE BATHROOM FAUCET WITH HOT & COLD HANDLE INSERTS	06-4682P	06-4682PSN	6