

TECHNICAL INFORMATION BULLETIN

ORDERING INFORMATION

Order code: **10054**
 Description: **BMH0400/TRITAP/C/CWA/H/K/STD**
 Internal code: **BALM0400TCA**
 UPC: **69549100541**
 Warranty: **3 Years**
 Certification: **cUL[®] US**
1029B
E244127

GENERAL INFORMATION

Ballast type: **Magnetic metal halide**
 Ballast style: **Core and coil**
 Circuit type: **CWA**
 ANSI code: **M59**
 Input voltage (V): **120/277/347**
 Input frequency (Hz): **60**
 Line volt regulation: **± 10%**
 Line watt regulation: **± 10%**
 Insulation class: **H(180°)**

Input voltage (V)	Operating current (A)	Open circuit current (A)	Starting current (A)	Rated lamp watts (W)	Input watts (W)	OCV (V)	Dropout voltage (V)	UL 1029 code	Fuse rating (A)	Input current (A)	Power factor	Starting temperature
120	4.00	3.50	2.90	400	458	300	60	B	10	2.50 - 3.10	90%	-20° F / -30° C
277	1.70	1.60	1.30	400	458	300	140	D	5	1.05 - 1.40	90%	-20° F / -30° C
347	1.40	1.30	1.00	400	458	300	175	D	4	0.85 - 1.10	90%	-20° F / -30° C

HIGH POTENTIAL TEST (V)


1 minute:	2 000
2 seconds:	2 500
OCV test:	270 - 330
Short circuit:	3.40 - 4.20

BALLAST DIMENSIONS


Dimension A (in.):	2.00
Dimension B (in.):	3.70
Lead Lengths (in.):	12.00
Weight (lbs):	13.00

CASE DIAGRAM


4 1/4" x 4 3/4" Core

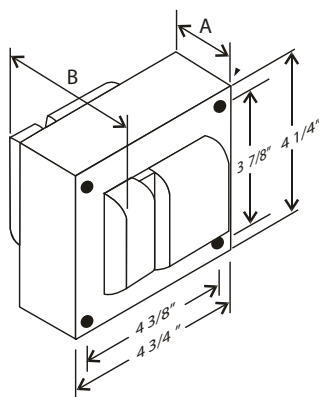


WIRING DIAGRAM

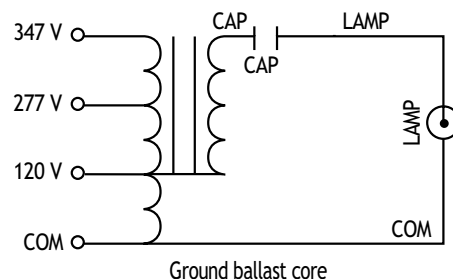

BRACKET

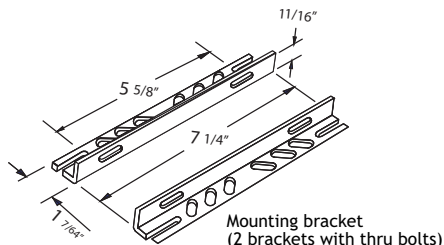

CAPACITOR

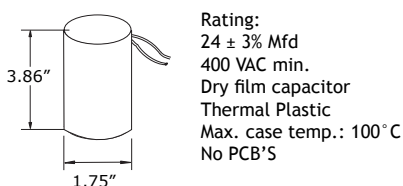

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.



www.standardpro.com