

TECHNICAL INFORMATION BULLETIN

ELECTRONIC SIGN BALLAST INSTANT START

ORDERING INFORMATION

GENERAL INFORMATION

Order code: 61017

Description: ESB/46/848/UV/STD

UPC: 69549610170

Warranty: 3 years

Ballast type: Electronic Plastic Sign

Starting method: Instant Start

Lamp connection: Parallel Input voltage: 120-277 V

Input frequency: 50/60 HZ Max. Case Temp: 90 °C

OCV: 860 V

Safety approval: 61017




Lamp type	Number of lamps		Lamp footage		Volts	Min. start temp	Max. input current	Max. input power	Max. THD	Power factor
	Min.	Max.	Min.	Max.	(V)	(°F / °C)	(A)	(W)		
T12/H0	4		8'	48'	120	-20/-29	3.50	410	10	0.98
112/110	4	0	0	40	277	-20/-29	1.50	405	10	0.97
T9 /UO	4	_	167	36'	120	-20/-29	3.20	370	10	0.98
T8/HO	4	0	16'	30	277	-20/-29	1.36	365	10	0.96

Ballast operates four, five or six T8HO lamps up to 6 feet long with total lamp length between 16 and 36 feet. Ballast operates four, five or six T12HO lamps up to 8 feet long with total lamp length between 8 and 48 feet.

WIRING DIAGRAM


BALLAST VELLOW BLACK VELLOW BLAMP BLUE LAMP BLUE LAMP BED LAMP BED

HOT SPOT LOCATION

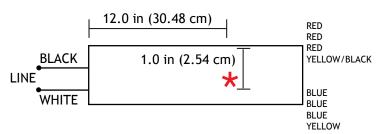

LEAD LENGTHS					
Lead colour	in.	cm			
Black	24	61.0			
White	24	61.0			
Blue	120	304.8			
Red	120	304.8			
Yellow	120	304.8			
Yellow/Black	120	304.8			

BALLAST	FEATURE:	S	
Length (L)	Width (W)	Height (H)	Mounting (M)
36.70 cm	8.90 cm	5.59 cm	34.93 cm
14.45 in	3.23 in	2.20 in	13.75 in



WARRANTY:

Ballast warranty of 5 years for electronic ballast 70 °C. Ballast warranty of 3 years for electronic ballast 90 °C. For more information visit our website.

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

