

# TECHNICAL INFORMATION BULLETIN

## T4

### Ordering Information

Order code: 10631  
Description: F20T4/41K/520mm/G5/STD  
UPC: 69549106314  
Case quantity: 48



### Performance Data

Initial lumens (lm): 1 260  
Nominal efficiency (lm/W): 63  
Wattage (W): 20  
Colour temperature (K): 4 100  
CRI: 80  
Average life (hrs): 8 000


<sup>1</sup> The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.

### Lamp Characteristics

Shape: T4  
Base: Min Bipin  
Diameter: 1/2 in. (12 mm)  
Nominal length: 20 in. (520 mm)  
Starting method: Rapid Start Lamp  
TCLP compliant: N/A  
Phosphor composition: Triphosphor  
Cathode guard: N/A  
Nominal lamp operating frequency (Hz): 60  
<sup>2</sup> Minimum starting temperature (°C): -10

<sup>2</sup> The minimum starting temperature is a function of the ballast. The minimum starting temperature is based on a STANDARD brand T4 Program Start ballast.

### Dimensions

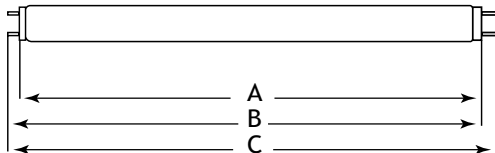

A Max Base face to base face	B Min/B Max Base face to end of opposite face pin	C Min/C Max End of base pin to the end of opposite end
19.83 in. 503.80 mm	20.11 in./20.16 in. 510.90 mm/512.10 mm	20.39 in./20.44 in. 518.00 mm/519.20 mm

F20 T4

### Spectral distribution

