

TECHNICAL INFORMATION BULLETIN

T4

Ordering Information

Order code: 10629
Description: F12T4/41K/430mm/G5/STD
UPC: 69549106291
Case quantity: 48



Performance Data

Initial lumens (lm): 880
Nominal efficiency (lm/W): 73
Wattage (W): 12
Colour temperature (K): 4 100
CRI: 80
Average life (hrs): 8 000


¹ The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.

Lamp Characteristics

Shape: T4
Base: Min Bipin
Diameter: 1/2 in. (12 mm)
Nominal length: 17 in. (430 mm)
Starting method: Rapid Start Lamp
TCLP compliant: N/A
Phosphor composition: Triphosphor
Cathode guard: N/A
Nominal lamp operating frequency (Hz): 60
² Minimum starting temperature (°C): -10

² The minimum starting temperature is a function of the ballast. The minimum starting temperature is based on a STANDARD brand T4 Program Start ballast.

Dimensions

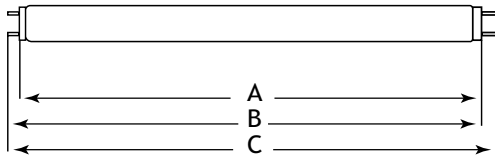

A Max
Base face
to base face
16.37 in.
416.00 mm

B Min/B Max
Base face to end
of opposite face pin
16.59 in./16.65 in.
421.80 mm/423.00 mm

C Min/C Max
End of base pin to the end
of opposite end
16.87 in./16.92 in.
428.80 mm/430.00 mm

F12T4

Spectral distribution

