

TECHNICAL INFORMATION BULLETIN ENERGY SAVER T5

Ordering Information

Order code: 10600
Description: F14T5/30K/8/PS/G5/STD
UPC: 69549106000
Case quantity: 25



Performance Data

Initial lumens (lm): 1 350
Mean lumens (lm): 1 280
Nominal efficiency (lm/W): 96
Wattage (W): 14
Colour temperature (K): 3 000
CRI: 85
Average life (hrs):
Based on a 3 hour start 24 000
Based on a 12 hour start 35 000

¹ The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.

Lamp Characteristics

Shape: T5
Base: Min Bipin
Diameter: 5/8 in. (16 mm)
Nominal length: 22 in. (559 mm)
Starting method: Program Start (PS)
TCLP compliant: Yes
Phosphor composition: Triphosphor
Cathode guard: Yes
Nominal lamp operating frequency (Hz): 60
² Minimum starting temperature (°C): -10


Benefits

One system Lamp/Ballast Warranty.
Extended lamp warranty from 2 to 3 years and ballast warranty from 3 to 5 years.



² The minimum starting temperature is a function of the ballast. The minimum starting temperature is based on a STANDARD brand T5 Program Start ballast.

Dimensions

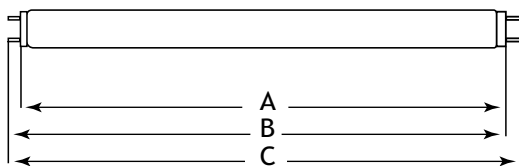

A Max
Base face
to base face

B Min/B Max
Base face to end of
opposite face pin

C Max
End of base pin to the end
of opposite end


F14T5

21.61 in.
549.0 mm

21.79 in./21.89 in.
553.7 mm/556.1 mm

22.17 in.
563.2 mm

Spectral distribution

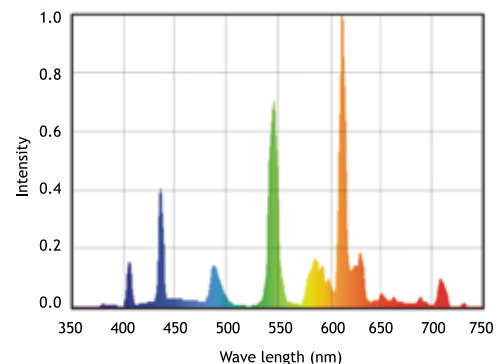

STANDARD
LEADERS IN LIGHTING

For more information on our complete product line visit us at www.standardpro.com