

TECHNICAL INFORMATION BULLETIN T8 2 FEET 800 SERIES

Ordering Information

Order code: 10015
Description: F17T8/35K/8/RS/G13/STD ESV
UPC: 69549100152
Case quantity: 25



Performance Data

Initial lumens (lm): 1 400
Mean lumens (lm): 1 330
Nominal efficiency (lm/W): 82
Wattage (W): 17
Colour temperature (K): 3 500
CRI: 85
Average life (hrs): 24 000

¹ The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.

Lamp Characteristics

Shape: T8
Base: Med Bipin
Diameter: 1 in. (26 mm)
Nominal length: 24 in. (610 mm)
Starting method: Rapid Start (RS)
TCLP compliant: Yes
Phosphor composition: Triphosphor
Cathode guard: Yes
Nominal lamp operating frequency (Hz): 60
² Minimum starting temperature (°C): -10


Benefits

One system Lamp/Ballast Warranty.
Extended lamp warranty from 2 to 3 years and ballast warranty from 3 to 5 years.



² The minimum starting temperature is a function of the ballast. The minimum starting temperature is based on a STANDARD brand T8 Instant Start ballast.

Dimensions

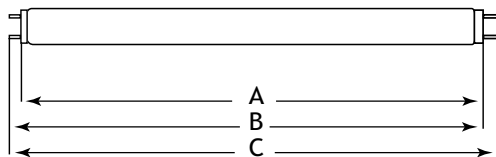


A Max
Base face
to base face
23.22 in.
589.8 mm

B Min/B Max
Base face to end
of opposite face pin
23.40 in./23.50 in.
594.4 mm/596.9 mm

C Max
End of base pin to the end
of opposite end
23.78 in.
604.0 mm

F17T8

Spectral distribution

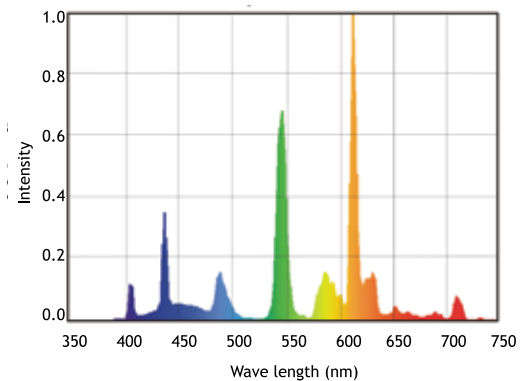

For more information on our complete product line visit us at www.standardpro.com