

# TECHNICAL INFORMATION BULLETIN

## T8 3 FEET PREHEAT

### Ordering Information

Order code: 10510  
Description: F30T8/CW/PH/G13/STD  
UPC: 69549105102  
Case quantity: 24



### Performance Data

Initial lumens (lm): 2 180  
Mean lumens (lm): 2071  
Nominal efficiency (lm/W): 73  
Wattage (W): 30  
Colour temperature (K): 4 100  
CRI: 62  
Average life (hrs): 7 500

1 The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.

### Lamp Characteristics

Shape: T8  
Base: Med Bipin  
Diameter: 1 in. (26 mm)  
Nominal length: 36 in. (915 mm)  
Starting method: Preheat Start (PH)  
TCLP compliant: Yes  
Phosphor composition: Triphosphor  
Cathode guard: Yes  
Nominal lamp operating frequency (Hz): 60

<sup>2</sup> Minimum starting temperature (°C): -10


### Benefits

One system Lamp/Ballast Warranty.  
Extended lamp warranty from 2 to 3 years and ballast warranty from 3 to 5 years.



2 The minimum starting temperature is a function of the ballast. The minimum starting temperature is based on a STANDARD brand T8 Instant Start ballast.

### Dimensions

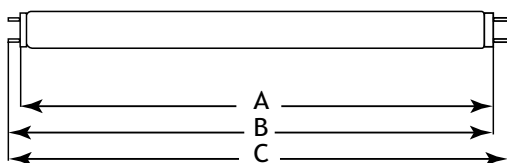

**A** Max  
Base face  
to base face  
36.02 in.  
915.0 mm

**B** Min/B Max  
Base face to end  
of opposite face pin

**C** Max  
End of base pin to the end  
of opposite end

F30T8

### Spectral distribution

