

TECHNICAL INFORMATION BULLETIN

SPECIALTY APPLIANCE

Ordering Information

Order code: 10508
Description: F17T8/CW/APL/28/PH/G13/STD
UPC: 69549105089
Case quantity: 100



Performance Data

Initial lumens (lm): 1 350
Nominal efficiency (lm/W): 79
Wattage (W): 17
Colour temperature (K): 4 100
CRI: 62
Average life (hrs): 7 500

For use with starters

IS=Instant Start PS=Program Start PRS=Program Rapid Start

¹ The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.

Lamp Characteristics

Shape: T8
Base: Med Bipin
Diameter: 1 in. (26 mm)
Nominal length: 28 in. (711 mm)
Starting method: Preheat Start (PH)
TCLP compliant: Yes
Phosphor composition: Triphosphor
Cathode guard: Yes
Nominal lamp operating frequency (Hz): 60

² Minimum starting temperature (°C): -10


Benefits

One system Lamp/Ballast Warranty.
Extended lamp warranty from 2 to 3 years and ballast warranty from 3 to 5 years.




² The minimum starting temperature is a function of the ballast. The minimum starting temperature is based on a STANDARD brand T8 Program Start ballast.

Dimensions

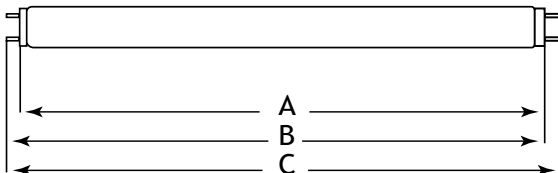

	A Max Base face to base face	B Min/B Max Base face to end of opposite face pin	C Max End of base pin to the end of opposite end
F17T8	27.22 in. 691.4 mm	27.40 in. / 27.49 in. 696 mm / 698.5 mm	27.77 in. 705.6 mm

Spectral distribution

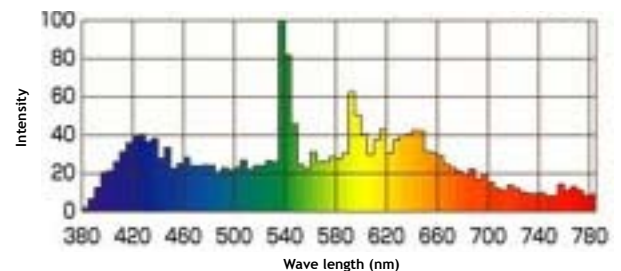

STANDARD
LEADERS IN LIGHTING

For more information on our complete product line visit us at www.standardpro.com