

TECHNICAL INFORMATION BULLETIN

T8 3 FEET 700 SERIES

Ordering Information

Order code: 10794
 Description: F25T8/35K/7/RS/G13/STD ESV
 UPC: 69549107946
 Case quantity: 25



Performance Data

Initial lumens (lm): 2 000
 Mean lumens (lm): 1 900
 Nominal efficiency (lm/W): 80
 Wattage (W): 25
 Colour temperature (K): 3 500
 CRI: 75
 Average life (hrs): 20 000

¹ The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.

Lamp Characteristics

Shape: T8
 Base: Med Bipin
 Diameter: 1 in. (26 mm)
 Nominal length: 36 in. (915 mm)
 Starting method: Rapid Start (RS)
 TCLP compliant: Yes
 Phosphor composition: Triphosphor
 Cathode guard: Yes
 Nominal lamp operating frequency (Hz): 60

² Minimum starting temperature (°C): -10


Benefits

One system Lamp/Ballast Warranty.
 Extended lamp warranty from 2 to 3 years and ballast warranty from 3 to 5 years.




² The minimum starting temperature is a function of the ballast. The minimum starting temperature is based on a STANDARD brand T8 Instant Start ballast.

Dimensions

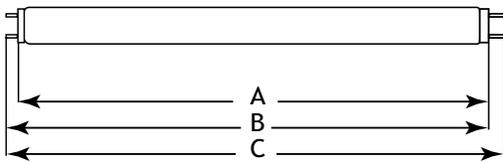

A Max	B Min/B Max	C Max
Base face to base face	Base face to end of opposite base pin	End of base pin to the end of opposite end
35.22 in. 894.6 mm	35.4 in. / 35.5 in. 899.2 mm / 901.7 mm	35.78 in. 908.8 mm

Spectral distribution

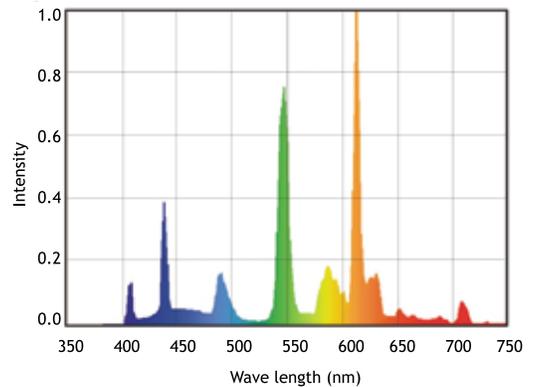

F25T8

