


## ORDERING INFORMATION

Order code: 62505  
 Description: LED/PAR38/16W/NFL/30K/25/D/STD  
 UPC: 069549625051  
 Case quantity: 6

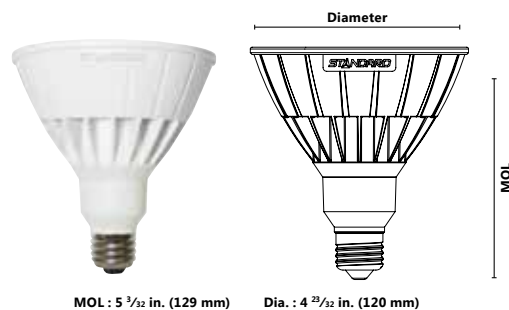

## PERFORMANCE DATA


Shape: PAR38  
 Wattage (W): 16  
 Lamp voltage (VAC): 120  
 Colour temperature (K)\*\*: 3 000  
 Average life (L70 hours): 40 000  
 Initial lumens (lm)\*: 1 020  
 Initial lumens per watt (lm/W): 64  
 CBCP: 4 444  
 CRI: 81  
 Beam angle: 25  
 Power factor:  $\geq 0.9$   
 Operating temperature range:  $-25^{\circ}\text{C}/-13^{\circ}\text{F}$  to  $40^{\circ}\text{C}/104^{\circ}\text{F}$   
 Base: E26

\*Initial lumens range: +/- 5 %

\*\*Typical colour temperature range: +/- 5 %



## BEAM SPREAD

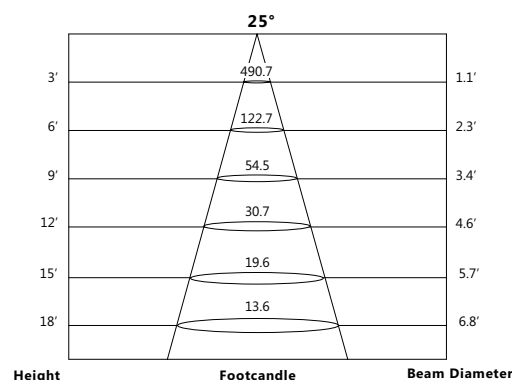

## COMPATIBLE DIMMER LIST

**LUTRON DIMMERS:** TGCL-153PH, TG-600PNLH, S-600, LGCL-153PLH, GL-600H, DVCL-153PL, TT-300NLH, DV-603PG, DV-600PH, D-603PH, CN-600P, AY-600P, NELV-450, DVELV-300P, SELV-300P, 6681.

**OTHER DIMMERS:** Leviton IPI06, 6684, 6683, 6633-P, 6613-P; Kaoyi KHD-154U; Legrand DRD4-W, DLV703-PLA, DCL453-PTC, D703-PTC, CDLV703-PW, CD703-PW.

## CAUTIONS

- Turn power off before inspection, installation, or removal.
  - Suitable for use in open fixtures.
  - Suitable for use in wet locations.
  - Do not open – no user serviceable parts inside.
  - Added weight of the device may cause instability of a freestanding portable luminaire. Use in portable table lamps in which the distance from the bottom of the base to the top of the lampholder does not exceed three (3) times the minimum base diameter.
  - Use only on 120 VAC, 60 Hz circuits.
  - This device is not intended for use with emergency exit fixtures or emergency exit lights.
  - Compatible with most dimmers.
  - Five year limited warranty.
  - For complete dimmer compatibility and warranty information visit [www.standardpro.com](http://www.standardpro.com).
  - Operating temperature:  $-25^{\circ}\text{C}/-13^{\circ}\text{F}$  to  $40^{\circ}\text{C}/104^{\circ}\text{F}$ .
- NOTES: This device complies with Part 15 of the FCC rules and has been tested and found to comply with the limits for a Class B digital device. This product may cause interference with other devices. If interference occurs, change the location of the product. Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment. This RFLD device complies with Canadian ICES-003. LED lamps must be stored, operated under suitable environmental conditions and in accordance with, but not limited to, the latest National Electrical Code, cETLus, cULus, CSA and ANSI specifications.