


T2 SPIRALS



Features

- Low mercury content of 1,5 mg
- Instant on
- Very long life
- 13 watts models are approved for use in enclosed fixtures
- Same color tone as incandescent (2 700 K)
- Full spiral structure allows for more solidity
- Super mini size fits most fixtures
- Operating temperatures:
-23°C/-10°F to 55°C/131°F
- Amalgam technology
-  Visit our website for a complete listing of all STANDARD ENERGY STAR qualified products

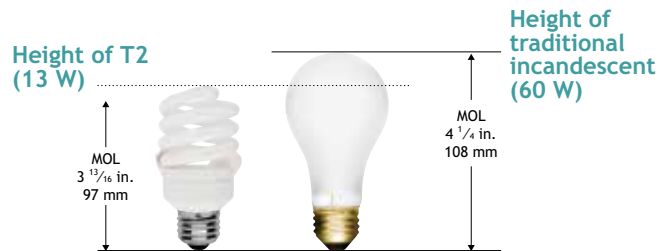

9 Watts



MOL = 3 9/16 in. (83 mm)
Dia. = 1 13/16 in. (46 mm)

13 Watts



MOL = 3 13/16 in. (97 mm)
Dia. = 1 25/32 in. (45 mm)

18 Watts



MOL = 4 13/16 in. (106 mm)
Dia. = 2 1/16 in. (54 mm)

23 Watts



MOL = 4 17/32 in. (115 mm)
Dia. = 2 5/32 in. (55 mm)

Order code	Description	Watts (W)	Base	Colour temp. (K)	CRI	Average life (hrs)	Initial lumens (lm)	Case qty	Incandescent equivalent (W)
------------	-------------	-----------	------	------------------	-----	--------------------	---------------------	----------	-----------------------------

T2 Spirals

59623	CF9/T2/27K/SPIRAL/E26/STD	9	E26	2 700	82	12 000	500	96	35
59618	CF13/T2/27K/SPIRAL/E26/STD	13	E26	2 700	82	12 000	900	48	60
60077	CF13/T2/35K/SPIRAL/E26/STD	13	E26	3 500	82	12 000	900	48	60
60078	CF13/T2/41K/SPIRAL/E26/STD	13	E26	4 100	82	12 000	900	48	60
59624	CF13/T2/50K/SPIRAL/E26/STD	13	E26	5 000	82	12 000	840	48	60
59629	CF18/T2/27K/SPIRAL/E26/STD	18	E26	2 700	82	12 000	1 250	48	75
59630	CF18/T2/30K/SPIRAL/E26/STD	18	E26	3 000	82	12 000	1 250	48	75
59631	CF18/T2/35K/SPIRAL/E26/STD	18	E26	3 500	82	12 000	1 250	48	75
59621	CF18/T2/41K/SPIRAL/E26/STD	18	E26	4 100	82	12 000	1 250	48	75
59628	CF18/T2/50K/SPIRAL/E26/STD	18	E26	5 000	82	12 000	1 250	48	75
59619	CF23/T2/27K/SPIRAL/E26/STD	23	E26	2 700	82	12 000	1 600	48	100
59622	CF23/T2/30K/SPIRAL/E26/STD	23	E26	3 000	82	12 000	1 600	48	100
59635	CF23/T2/35K/SPIRAL/E26/STD	23	E26	3 500	82	12 000	1 600	48	100
59620	CF23/T2/41K/SPIRAL/E26/STD	23	E26	4 100	82	12 000	1 600	48	100
59632	CF23/T2/50K/SPIRAL/E26/STD	23	E26	5 000	82	12 000	1 600	48	100
60117	CF23/T2/65K/SPIRAL/E26/STD	23	E26	6 500	82	12 000	1 600	48	100