
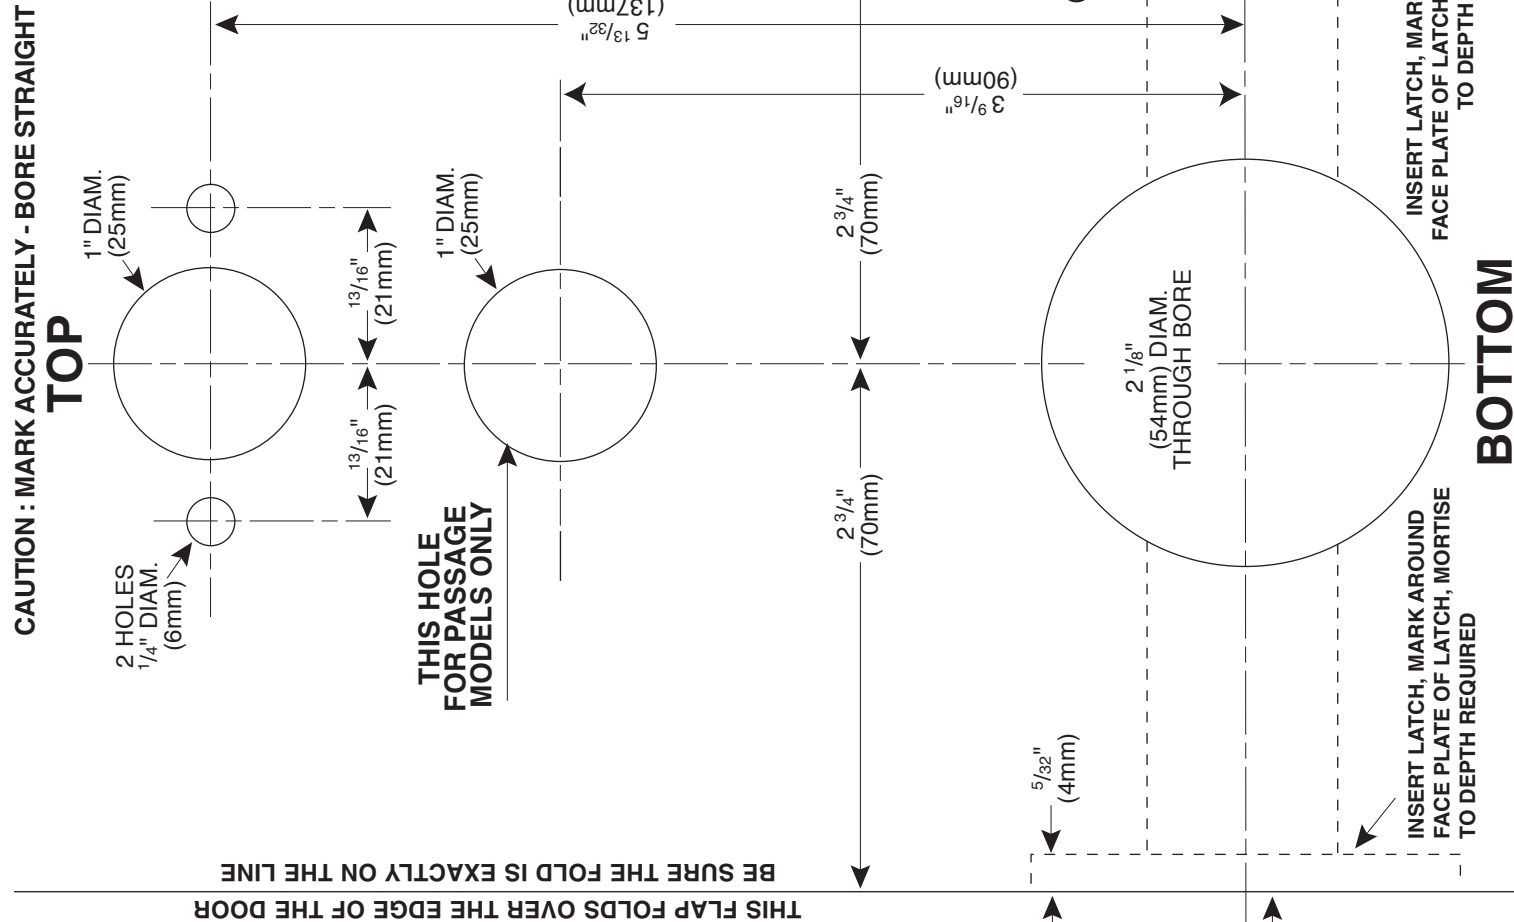
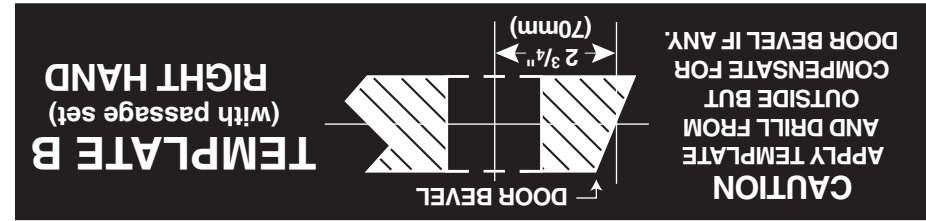


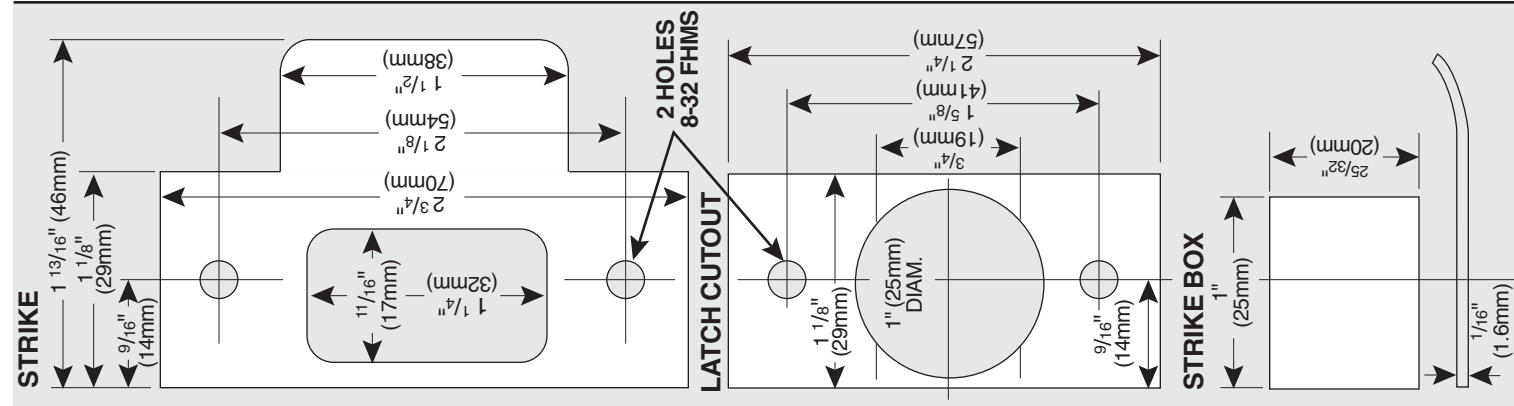

TEMPLATE B
(with passage set)
LEFT HAND

NOTE: Lock will accommodate doors 1 3/8" (35mm) to 2 1/4" (57mm) thick. Suitable reinforcement shall be provided by the hollow metal door manufacturer to prevent collapsing of door. When door silencers are to be installed, proper allowances must be made for strike location.

MARK CENTER OF DOOR THICKNESS

2 1/4" (57mm)
1 3/4" (44mm)
1 3/8" (35mm)
1 1/2" (38mm)
2" (51mm)

CROSS BORE 1" (25mm) DIA. LATCH HOLE