



- **Mechanical Pushbutton Lock**
- **Single Access Code**
- **Cylindrical**
- **Knob**

### Features

<b>Access Control:</b>	Mechanical pushbutton lock eliminates problems and costs associated with issuing, controlling, and collecting keys and cards. Provides exterior access by combination, while allowing free egress.
<b>No Battery:</b>	Fully mechanical lock eliminates the material and labor expense of battery replacements
<b>Locking Device:</b>	Cylindrical latch with 3-hour UL/ULC fire rating on "A" labeled doors
<b>Number of Codes:</b>	Single access code—one easy-to-manage code for all users
<b>Programming:</b>	Lock is easily programmed via keypad without removing lock from the door
<b>Handing:</b>	Factory-handed for left-hand doors; easily field reversible
<b>Key Override (Optional):</b>	Small format interchangeable cores, large format removable cores
<b>Operation Modes:</b>	<p><u>Pushbutton Access</u></p> <p><u>Passage</u> (select models)—allows access without using the lock entry code. Feature activated from the inside with a thumbturn or key (included with all passage feature models).</p> <p><u>Lockout</u> (select models)—disables the lock from the inside so that the entry code cannot be used to gain access. Access is permitted using the key override only.</p>
<b>Economical:</b>	A cost effective access control solution

### Mechanical Features

<b>Construction:</b>	Heavy-duty cylindrical lock housing with cast front housing; unified trim plate; cast knobs
<b>Numeric Keypad:</b>	Vandal resistant, solid metal pushbuttons
<b>Handing:</b>	Factory-handed for left-hand doors; easily field reversible
<b>Standard Finishes:</b>	Satin Chrome 26D (626), Antique Brass 05 (609)
<b>Optional Finishes:</b>	Bright Brass 03 (605), Bright Chrome 026 (625)
<b>Backset:</b>	2¾" (70 mm), 2⅝" (60 mm)
<b>Latch:</b>	½" (13 mm) throw latch, ¾" (19 mm) throw latch (optional)
<b>Minimum Stile Recommended:</b>	5" (127 mm)
<b>Weight:</b>	7.25 lbs. (3.3 kg)
<b>Strike:</b>	Standard strike plate; ASA strike plate

### Key Override

**Interchangeable Cores:** Small format—Best and equivalents (6 or 7-pin length); core not included

**Removable Cores:** Large format—Medeco/ASSA/Yale/Abloy (5 or 6-pin length), Corbin Russwin, Schlage, and Sargent; core not included

### Installation

**Door Preparation:** Easily installs on wood or metal doors. ASA 161 door preparation with additional through bore holes required.

**Door Thickness:** 1<sup>3</sup>/<sub>8</sub>" (35 mm) to 2<sup>1</sup>/<sub>4</sub>" (57 mm)—Pre-assembled to accommodate 1<sup>5</sup>/<sub>8</sub>" (41 mm) to 2" (51 mm)

**Items Supplied Include:** Lock assembly, installation manual, full-scale template, combination change plug and access key, and required installation hardware

### Certification and Testing


**Durability:** Weather resistant

**Fire Rating:** 3-hour UL/ULC fire rating for "A" labeled doors


### Warranty

**Warranty:** 3-year warranty

### Cylindrical

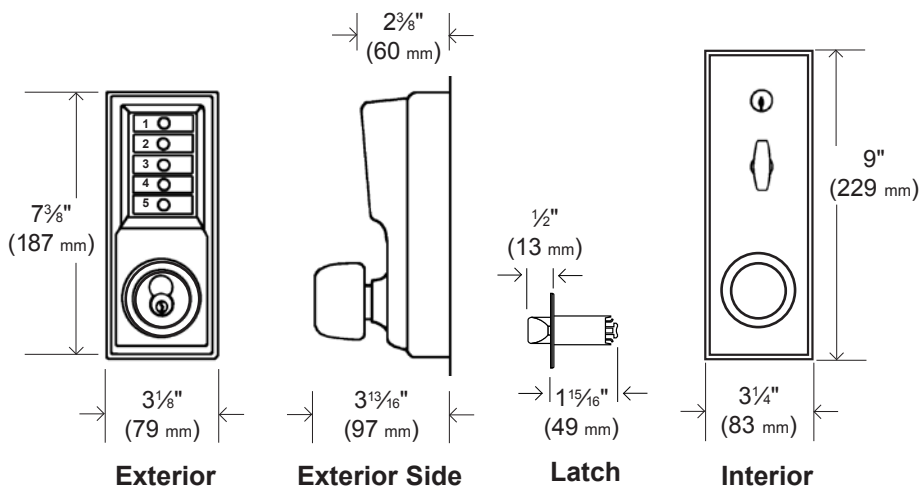


#### Model 101x




- Combination Entry
- Interior Combination Change

#### Model 102x




- Combination Entry
- Key Override (not supplied)
- Interior Combination Change

#### Model 103x




- Combination Entry
- Interior Combination Change
- Passage

#### Model 104x



- Combination Entry
- Key Override (not supplied)
- Passage
- Interior Combination Change

#### Lockout Models



- Combination Entry
- Key Override (not supplied)
- Interior Combination Change
- Lockout from Inside Trim