




STANDARD ACCUBEAM LAMP SERIES use an innovative reflector design that forms the light beam before it reaches the lens.

The innovative corrugated reflector allows for greater light concentration at the centre of the beam giving a light output that is comparable to conventional halogen using less wattage.

ACCUBEAM was designed to deliver a smooth, precise beam pattern and allows for even light distribution; without hot spots or striations.

Compare with any other conventional PAR lamps and see the difference!

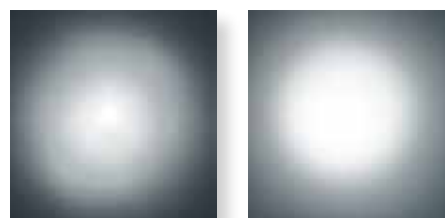

Conventional
PAR38 halogen

PAR38
ACCUBEAM

PAR20



MOL = 3 1/2 in. (83 mm)
Dia. = 2.5 in. (63.5 mm)

PAR30



MOL = 3 3/4 in. (92 mm)
Dia. = 3 1/4 in. (95 mm)

PAR38



MOL = 5 1/4 in. (135 mm)
Dia. = 4 3/4 in. (121 mm)

Order code	Description	Watts (W)	Base	Volts (V)	Beam angle (°)	Beam spread	CBCP (cd)	Average life (hrs)	Initial lumens (lm)	Case qty
PAR20										
50004	H50PAR20/NSP/2.5M/120V/STD ACC	50	E26	120	10	Narrow Spot	4 000	2 500	600	15
50003 ¹	H50PAR20/NSP/5M/130V/STD ACC	50	E26	130	10	Narrow Spot	4 000	5 000	450	15
50002	H50PAR20/NFL/2.5M/120V/STD ACC	50	E26	120	30	Narrow Flood	1 500	2 500	600	15
50001 ¹	H50PAR20/NFL/5M/130V/STD ACC	50	E26	130	30	Narrow Flood	1 500	5 000	450	15
PAR30										
50008	H50PAR30/NFL/2.5M/120V/STD ACC	50	E26	120	30	Narrow Flood	1 850	2 500	600	15
50006	H50PAR30/FL/2.5M/120V/STD ACC	50	E26	120	40	Flood	1 300	2 500	600	15
50009 ¹	H50PAR30/NSP/5M/130V/STD ACC	50	E26	130	10	Narrow Spot	6 000	5 000	450	15
50007 ¹	H50PAR30/NFL/5M/130V/STD ACC	50	E26	130	30	Narrow Flood	1 850	5 000	450	15
50005 ¹	H50PAR30/FL/5M/130V/STD ACC	50	E26	130	40	Flood	1 300	5 000	450	15
50014	H75PAR30/NFL/2.5M/120V/STD ACC	75	E26	120	30	Narrow Flood	3 200	2 500	1 100	15
50012	H75PAR30/FL/2.5M/120V/STD ACC	75	E26	120	40	Flood	1 600	2 500	1 100	15
50015 ¹	H75PAR30/NSP/5M/130V/STD ACC	75	E26	130	10	Narrow Spot	9 000	5 000	825	15
50013 ¹	H75PAR30/NFL/5M/130V/STD ACC	75	E26	130	30	Narrow Flood	3 200	5 000	825	15
50011 ¹	H75PAR30/FL/5M/130V/STD ACC	75	E26	130	40	Flood	1 600	5 000	825	15
PAR38										
50066	H45PAR38/SP/5M/130V/STD ACC	45	E26SKT	130	10	Spot	7 000	5 000	390	15
50041 ¹	H45PAR38/FL/5M/130V/STD ACC	45	E26SKT	130	30	Flood	1 700	5 000	390	15
58164	H60PAR38/FL/5M/130V/STD ACC	60	E26SKT	130	30	Flood	3 200	5 000	540	15
50101 ¹	H75PAR38/FL/5M/130V/STD ACC	75	E26SKT	130	30	Flood	3 300	5 000	825	15
50046	H90PAR38/SP/2.5M/120V/STD ACC	90	E26SKT	120	10	Spot	12 000	2 500	1 300	15
50044	H90PAR38/FL/2.5M/120V/STD ACC	90	E26SKT	120	30	Flood	3 750	2 500	1 300	15
50045 ¹	H90PAR38/SP/5M/130V/STD ACC	90	E26SKT	130	10	Spot	12 000	5 000	975	15
50043 ¹	H90PAR38/FL/5M/130V/STD ACC	90	E26SKT	130	30	Flood	3 750	5 000	975	15

¹This product is no longer manufactured as per Energy Efficiency Regulations, note that it will remain available until stock is depleted.