



Note: RoHS applies only to 316 SS version

## Description & Features:

- Incorporates a sintered, porous 316 stainless steel snubbing element with a large surface area to ensure long term effectiveness
- Available in the three standard viscosity classifications of heavy oil, water and air
- Brass or stainless steel housings can be specified depending upon pressure media and operating pressure
- CRN registered
- 1 year warranty

## Applications:


- To significantly lessen the damaging effects of pulsation on gauges, transducers, transmitters, manometers and pressure switches

Specifications	SS	Brass
Operating Temperature	-320°F to 1,500°F (-195°C to 815°C)	-65°F to 650°F (-53°C to 343°C)
Operating Pressure	Maximum 20,000 psi (137,900 kPa)	Maximum 10,000 psi (68,950 kPa)
Burst Pressure	60,000 psi (413,700 kPa)	30,000 psi (206,850 kPa)
Housing	316 SS	Brass
Snubbing Element	Sintered, porous type 316 SS	Sintered, porous type 316 SS
Retainer	300 series SS	300 series SS

## Order Codes (products in bold are normally in stock)

Model	Heavy Oil	Water	Air
1/4" Brass	<b>SSN517</b>	<b>SSN515</b>	<b>SSN516</b>
1/4" SS	<b>SSN520</b>	<b>SSN518</b>	<b>SSN519</b>
1/2" Brass	SSN514	<b>SSN512</b>	SSN513
1/2" SS	SSN531	<b>SSN529</b>	SSN530

### 1/4" Snubber

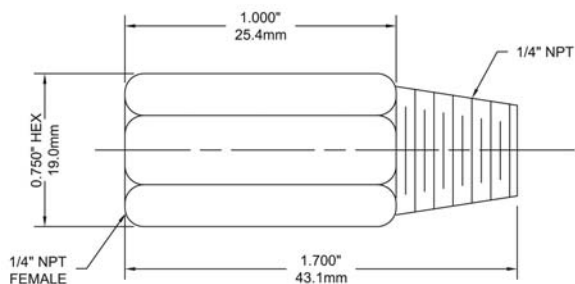

### 1/2" Snubber

