



Optional Thermowell

Description & Features:

- Measures both pressure and temperature on the same dial
- 2.5" (63mm) and 3" (75mm) dials
- Dual scale (°F & °C)
- Back or bottom connection
- Brass wetted parts
- 2" (50mm) stems
- Multiple pressure and temperature ranges available
- Ranges are compliant to industry standard ASME Boiler Code Section IV HG-612
- 5 year warranty

Applications:

- Hot water and steam pressure for boilers

Specifications

Dial	2.5" (63mm), 3" (75mm) aluminum, painted white
Case	Steel, painted black
Lens	2.5" (63mm): Plexiglass 3" (75mm): Glass
Ring	2.5" (63mm): Acrylic, threaded 3" (75mm): Chrome
Stem	Brass
Socket	Brass
Tube	Brass
Movement	Brass and phosphor bronze
Sensing Element	Temperature: Bi-metallic coil Pressure: Bourdon tube
Pointer	Aluminum, anodized black
Welding	Tin-alloy solder
Pressure Limit	75% of full scale range
Ambient Temperature	23°F to 122°F (5°C to 50°C)
Process Temperature	75% of full scale range
Accuracy	Pressure: $\pm 3-2-3\%$ Temperature: $\pm 3\%$ of full scale
Enclosure Rating	IP50

Order Codes (products in bold are normally in stock)


Range	Dial	Connection	Code
0-75psi/kPa, 50°F to 320°F & 10°C to 160°C	2.5" (63mm)	1/4" NPT, Back	TTD400
0-75psi/kPa, 30°F to 250°F & 0°C to 120°C	2.5" (63mm)	1/4" NPT, Extension Back	TTD401
0-75psi/kPa, 30°F to 250°F & 0°C to 120°C	2.5" (63mm)	1/4" NPT, Back	TTD404
0-75psi/kPa, 30°F to 250°F & 0°C to 120°C	3" (75mm)	1/2" NPT, Bottom	TTD403
0-75psi/kPa, 30°F to 250°F & 0°C to 120°C	3" (75mm)	1/2" NPT, Back	TTD402
0-200psi/kPa, 30°F to 250°F & 0°C to 120°C	3" (75mm)	1/2" NPT, Bottom	TTD405
0-200psi/kPa, 30°F to 250°F & 0°C to 120°C	3" (75mm)	1/2" NPT, Back	TTD407
0-100psi/kPa, 30°F to 250°F & 0°C to 120°C	3" (75mm)	1/2" NPT, Back	TTD408
0-100psi/kPa, 30°F to 250°F & 0°C to 120°C	3" (75mm)	1/2" NPT, Bottom	TTD409
0-250psi/kPa, 50°F to 250°F & 10°C to 120°C	3" (75mm)	1/2" NPT, Back	TTD398
0-250psi/kPa, 50°F to 250°F & 10°C to 120°C	3" (75mm)	1/2" NPT, Bottom	TTD399

Other ranges and connection sizes available upon request.


Option suffix:

TST025 = 1/4" brass thermowell
TST050 = 1/2" brass thermowell


2.5" Back Connection

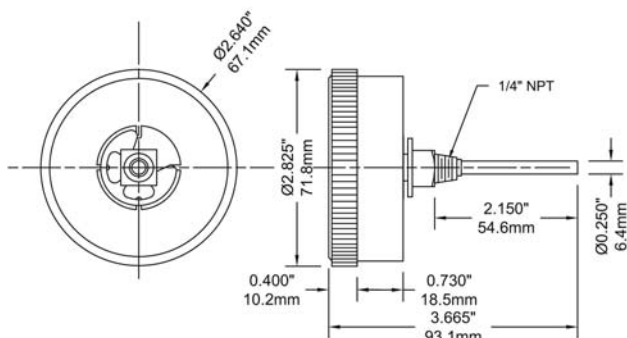


2.5" Extension Back Connection

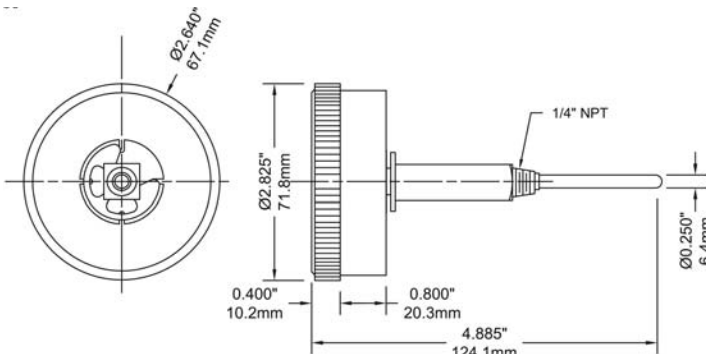


3" Bottom Connection

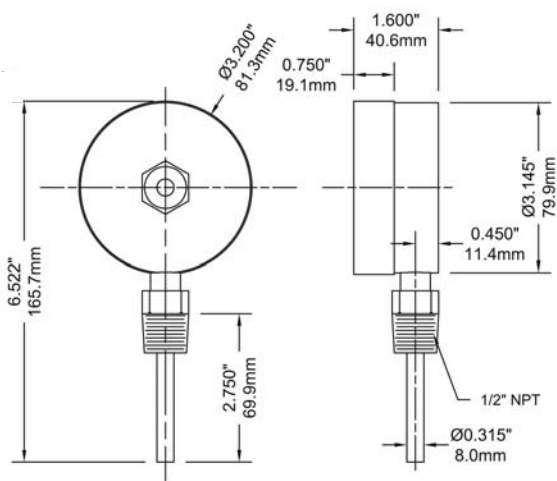

3" Back Connection

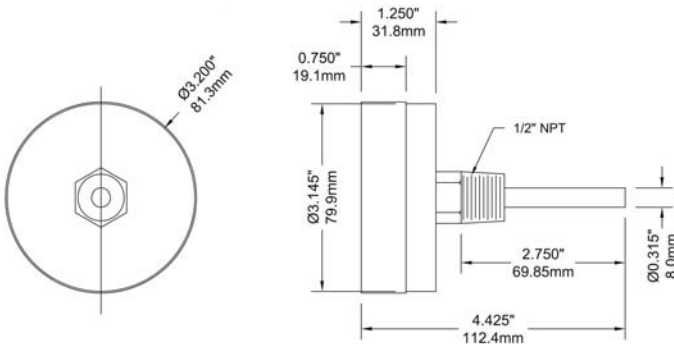

1/4" TST025

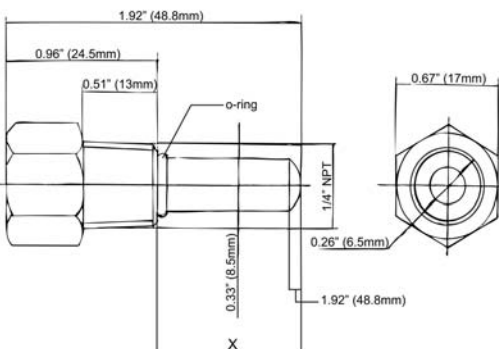

1/2" TST050

