


Features

- Easy to install
- Triple voltage (115/208/230)
- All angle
- Sleeve bearing
- 3/8" shaft with 1/2" adapter included
- Complete with resilient base
- Longer shafts
- Automatic reset thermal overload protector
- 30" colour coded leads with grommet exit
- Mechanically reversible
- 1/10 HP rating replaces G.E. 1/20, 1/15, & 1/10 motors
- Strap, stud or base mount
- 2 1/4", 2 1/2 Resilient rings
- 2 5/8" Shaft height

These specially designed Rotom motors will replace hundreds of Universal, Fasco & G.E. 21/29 frame motors. This means reduced inventory, better turnover, competitive prices and increased profits.

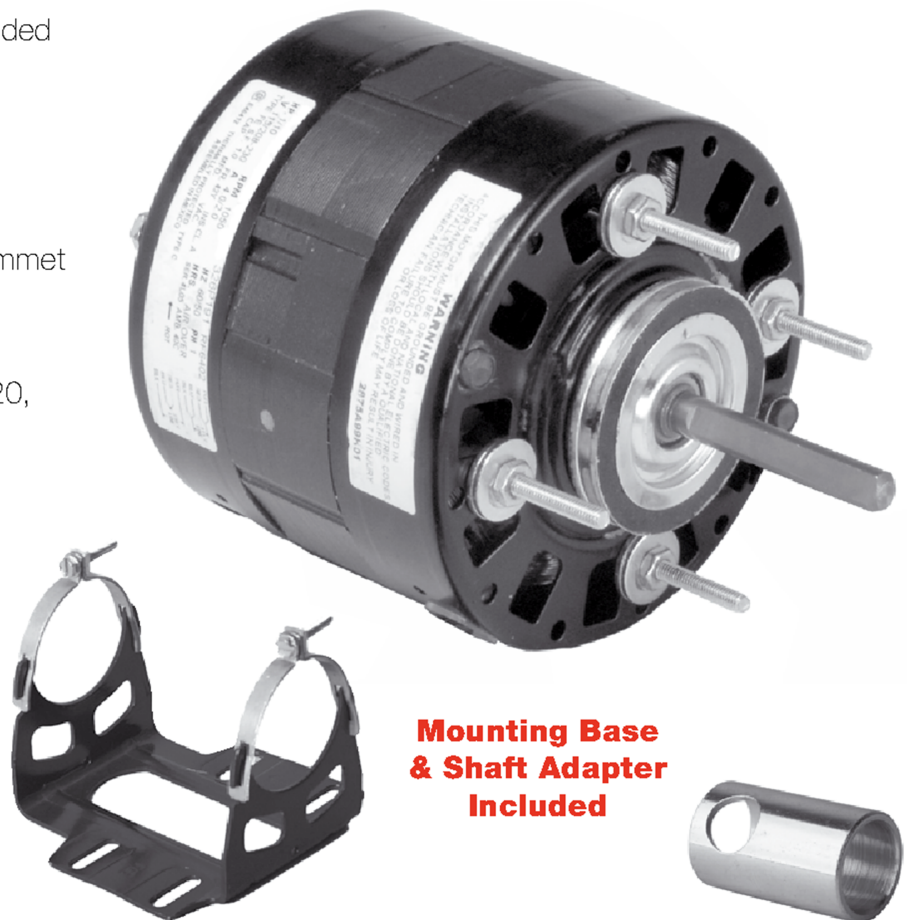

**Mounting Base
& Shaft Adapter
Included**

Used on many commercial condensing units such as Copeland, Tecumseh, Hussmann & Tyler as well as unit cooler fans and blowers, refrigeration cabinets, unit heaters, space heaters, remote air conditioners, blower units and other air moving applications.

Part #	HP	Volts	Amps	RPM	Dia	Rot	Type	Body	Shaft	Comment
M4-R2930	1/10	115/208/230	4.0	1/1050	5.0"	CCW	SP	4.80"	2.3" x 3/8"	GE2121, 2122, 2223, 2321, 2322, RF6402
M4-R2940	1/10	115/208/230	4.0	1/1050	5.0"	CW	SP	4.80"	2.3" x 3/8"	GE2113, 2213, 2311, 2312, RF6403
M4-R2942	1/10	115/208/230	4.0	1/1550	5.0"	CCW	SP	4.80"	2.3" x 3/8"	GE2141, 2142, 2241, 2242, 2341, 2342, RF4400
M4-R2932	1/10	115/208/230	4.0	1/1550	5.0"	CW	SP	4.80"	2.3" x 3/8"	GE2131, 2132, 2231, 2232, 2331, 2332, RF4401