

Part Number	Nominal Size HxWxD	Media Area (ft²)	CFM Capacities	
			Medium	High
19625	12x24x1	4.7	750	1000
10380	12x24x2	9	750	1000
10393	12x24x4	14.5	1000	1250
19641	20x20x1	6.6	1050	1400
19661	20x20x2	12.6	1050	1400
19670	20x20x4	20.1	1400	1750
19642	20x24x1	7.7	1250	1650
19662	20x24x2	18.1	1500	2000
19671	20x24x4	24.2	1657	2100
19645	24x24x1	9.3	1500	2000
19664	24x24x2	18.1	1500	2000
19673	24x24x4	29	2000	2500

Characteristics	Aerostar Series 1100 Pleated Filter
Media	Moisture resistant 100% synthetic media
Frame	Moisture resistant frame
ASHRAE Efficiency	MERV 11
Max. Temperature	150 °F
Max. Humidity	100% Relative Humidity.
Flamability	UL900 Classified as to flamability Class 2 (R12347).
Height Tolerance	+0 and -1/8"
Width Tolerance	+0 and -1/8"
Depth Tolerance	± 1/16"
Actual Frame Size	Please contact local sales person or customer service for actual sizes.


Filter Depth	Medium Velocity (FPM)	Initial Resistance (in. wg)	High Velocity (FPM)	Initial Resistance (in. wg)	Final Resistance* (All filters) (in. wg)
1"	375	0.30	500	0.45	1.0
2"	375	0.21	500	0.34	1.0
4"	500	0.34	625	0.45	1.0

* Recommended final resistance. System may dictate a lower change-out point. (Filters tested to 1.5" wg)

For Sales Only

Customer Information: _____

Item Number: _____

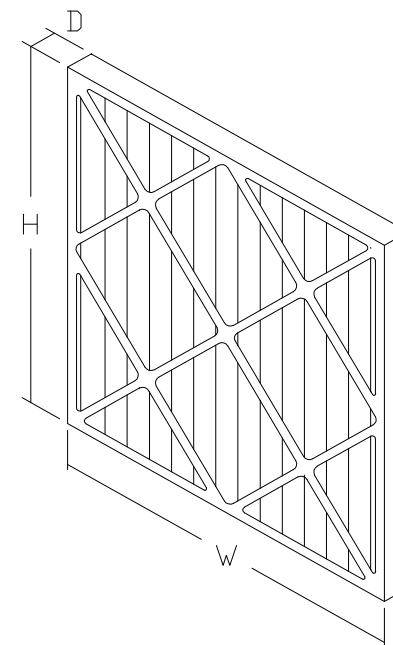

For Non-Standard Sizes, Please Consult the Factory.

_____ (H) X _____ (W) X _____ (D)

Please Specify Size as Nominal or Exact _____

Customer Initial and Date for Non-Standard Size _____



Filtration Group, Inc.
912 East Washington Street
Joliet, Illinois 60433

AEROSTAR

Series 1100 Pleat

DR:	SC	Date:	12/15/2005	Drawing Number:	Revision:
CK:	FH	Date:	12/29/2005	SD-1100-PLT	A