







 RP19754▲	 RP51345	 RP52216 RP60729 RP60983 RP63886	 RP53339	 RP53343▲	 RP53344▲	 RP53346▲
 RP53347▲	 RP54977	 RP61340▲	 RP62734 RP77767	 RP64019▲		

Submitted Model No.: _____

Specific Features: _____

Part #	Description	Models
 RP19754	1.5 gpm aerator assy 15/16"-27 male	585, 3585, 586, 3586, 2530, 3530, 4530, (500, 501, 502, 505, 520, 522, 523, 524, 525, 540, 541, 542, 544, non-DST), 3544, 3543, 2522, 2521, 2520, 2502, 2500, 583, 2583, 3483, 3582, 582
 RP51345	1.5 gpm aerator assy M16.5x1 male	(538 non-DST), 2538, 3538, 4538, 2592, 3592, 4592 Wrench Included
 RP52216	1.5 gpm aerator assy M21.5x1 male	2551, 3551, 4551 (500, 501, 502, 511, 515, 516, 520, 522, 523, 540, 541, 542, 544 DST) Wrench RP52217
 RP53339	1.5 gpm aerator assy M21.5x1 male	578, 579 non-DST Wrench RP52217
 RP53343	1.5 gpm aerator assy 3/4"-27 female	555, 755, 2555, 3555, 4555, 2155
 RP53344	1.5 gpm aerator assy 15/16"-27 male	2540, 3540, 4540
 RP53346	1.5 gpm aerator assy 55/64"-27 female	2569, 3569, 4569
 RP53347	1.5 gpm aerator assy 13/16"-27 male	2578, 3578, 4578, 2575, 3575, 4575
 RP54977	1.5 gpm aerator assy 13/16"-27 male	(538, 578, 579, 551, 592, 751, 792, 2578, 3578, 15938T DST) Wrench RP52217
 RP60729	0.5 gpm M21.5x1 male	(500, 501, 502, 520, 522, 523, 524, 525 DST) Wrench RP52217
 RP60983	1.5 gpm aerator assy M21.5x1 male	(500, 501, 502, 520, 522, 523, 524, 525 DST) Wrench RP52217
 RP61340	1.5 gpm aerator 15/16"-27 male	B501LF, B510LF, B512LF, (B2510LF, B2512LF - Male), B2596LF, B3596LF
 RP62734	1.5 gpm insert	All handshowers
 RP77767	1.75 gpm insert	All handshowers
 RP63886	1.0 gpm aerator M21.5x1 male	2551, 3551, 4551 (500, 501, 502, 511, 515, 516, 520, 522, 523, 540, 541, 542, 544 DST) Wrench RP52217
 RP64019	1.5 gpm aerator 15/16"-27 female	B2510LF, B2512LF - Female

▲ Designate Proper Finish Suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

DSP-L-AERATORS Rev. C




WATER EFFICIENT LAVATORY AERATORS

STANDARD SPECIFICATIONS:

- Maximum 0.5 gpm flowrate @ 60 PSI.
- Maximum 1.0 gpm flowrate @ 60 PSI.
- Maximum 1.5 gpm flowrate @ 60 PSI.
- Water efficient uses 30% less than industry standard of 2.2 gpm @ 60 PSI per ASME.

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

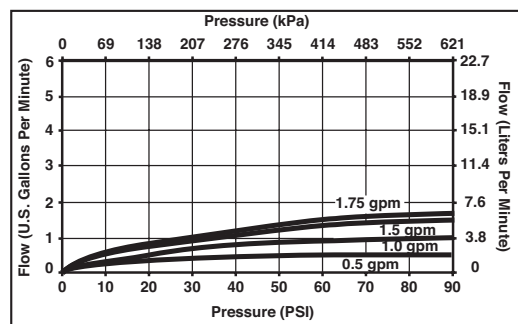

55 E. 111th Street, Indianapolis, Indiana 46280
350 South Edgeware Road, ST. Thomas, ON N5P 4L1
© 2014 Masco Corporation of Indiana