

INSTALLATION INSTRUCTIONS

for Direct Drive Automatic Washer

Clutch Band and Lining

⚠ WARNING




Electrical Shock Hazard


Disconnect power before servicing.
Replace all parts and panels before operating.
Failure to do so can result in death or electrical shock.

NOTE:


- The "3" Pad design is also a direct replacement for the "6" Pad clutch applications.
- Be sure to replace the brake cam driver, which is supplied in this kit.

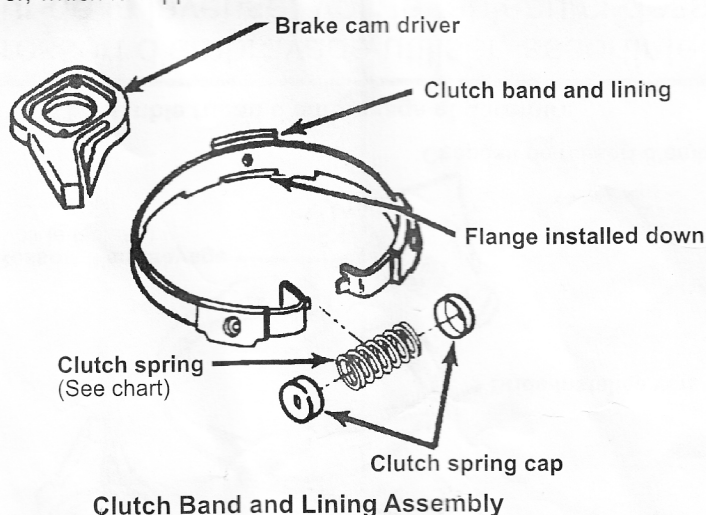


To determine which clutch spring to use, match the cabinet style and width of the washer. See chart below.

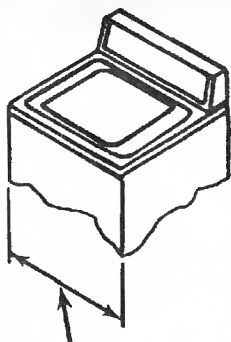


24" or 27" Regular, large capacity,
Extra and Super capacity.
Use 3946792 blue spring.

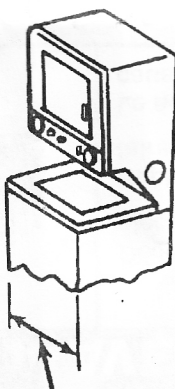

27" Over/Under laundry
system. Use 3946792
blue spring.

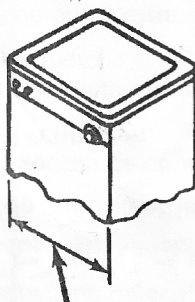

24" Compact. Use
8559387 green spring.

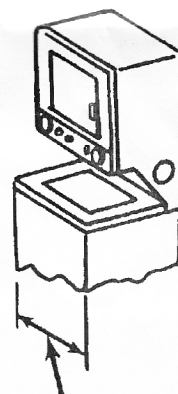

24" Over/Under laundry system.
Use 8559387 green spring.