

RMP

PLASTIC RUNNING MAN

LED 120/347VAC Input



Approvals:

CSA Certified to C22.2 #141 and C860



DESCRIPTION

The RMP series of commercial plastic running man signs is designed using durable and lightweight high impact thermoplastic. Signs and canopy quick snap together for speedy installations. Available in AC only, AC/DC and internally self-powered versions.

CIRCUITRY - AC & AC/DC

- LED ultra bright light source
- 120/347VAC Input, field selectable
- 1.9W power consumption single or double face
- Emergency DC wattages as follows:
6VDC = 0.9W **12VDC** = 0.9W **24VDC** = 0.9W


CIRCUITRY - SELF-POWERED

- LED ultra bright light source
- 120/347VAC Input, field selectable
- 2.2W power consumption single or double face
- High-performance, sealed Ni-Cad battery
- 90 minutes emergency duration (standard)
120 minutes emergency duration is optional
- Solid state transfer and battery charger

MECHANICAL

- High impact, UV stabilized, thermoplastic construction
- Quick snap faceplates, backplate and universal canopy for rapid and simple installation
- Universal spider knockout pattern stamped into backplate for junction box mounting
- Universal models include ceiling or end mount, field installable canopy kit c/w spider plate
- White colour is standard

DIMENSIONS

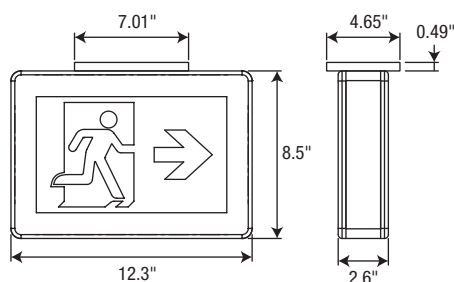

Comes standard with three pictogram legends for direction selection.

ORDERING GUIDE

RMP	0	WH	—	/
Series	Nbr of faces	Colour	DC Voltage	Options†
RMP	0 - Universal faces	WH - White	NDC - AC only UDC - Universal DC backup voltage 6, 12 or 24VDC selectable IB - Self-powered for 90 minutes IB1 - Self-powered for 120 minutes	K5, OP, BO, WO, PG, WG*

† For detailed options descriptions, please consult the options page.

* Specify mounting.