

ORDERING INFORMATION

Order code: 10477
Description: E224T5PS120-277/N
UPC: 69549104778



SPECIFICATIONS

Ballast type: Electronic
Starting method: Program Start
Lamp connection: Series
Input voltage (V): 120-277V
Input frequency (Hz): 60HZ
Max. case temperature: 75 °C
Thermal protection: Class P

Type: 1 Outdoor
Contains PCBs: No
Sound rating: A
Open current voltage (OCV) (V): 550
Inherent thermal protection: Yes
Lamp protection circuit: Yes
ICES-005 Compliant: Class A RFLD
End of life (EoL) protection: Yes
Auto-restrike: Yes



Lamp type	Number of lamps	Rated lamp watts	Min. start temp. (°F / °C)	Input current (A)	Input power (ANSI watts)	Ballast factor	Max THD (%)	Power factor	Max. lamp current crest factor	B.E.F.
120 VOLTS										
F24T5HO (24W)	2	24	-4/-20	0.38	46	0.90	10	0.99	1.7	1.96
F24T5HO (24W)	1	24	-4/-20	0.22	26	0.98	10	0.99	1.7	3.77
230 VOLTS										
F24T5HO (24W)	2	24	-4/-20	0.21	47	0.98	10	0.99	1.7	2.09
F24T5HO (24W)	1	24	-4/-20	0.12	27	1.00	15	0.99	1.7	3.70
277 VOLTS										
F24T5HO (24W)	2	24	-4/-20	0.18	48	0.98	10	0.99	1.7	2.04
F24T5HO (24W)	1	24	-4/-20	0.10	27	1.00	27	0.99	1.7	3.70

WARRANTY:


Ballast warranty of 5 years for electronic ballast 75 °C. Ballast warranty of 3 years for electronic ballast 90 °C.
For more information visit our website.

Data is based upon tests performed in a controlled environment and representative of relative performance.
Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.
March 9, 2015

ORDERING INFORMATION


Order code: 10477
 Description: E224T5PS120-277/N
 UPC: 69549104778

WIRING DIAGRAM

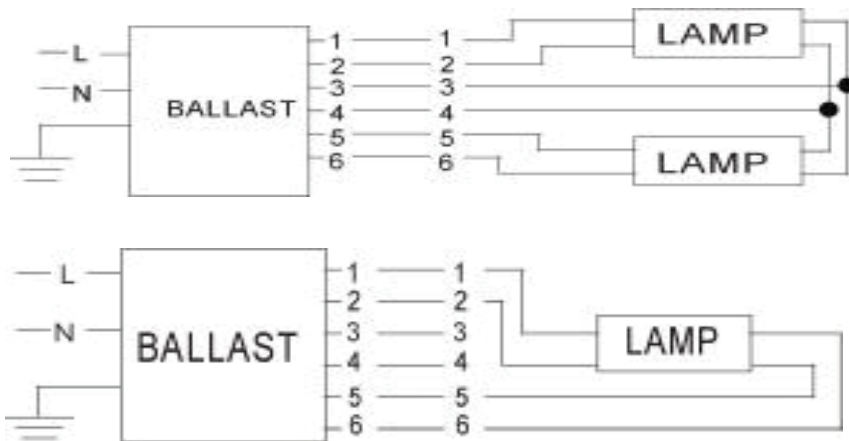

BALLAST DIMENSIONS

Length (L):	11.50" (29.2 cm)
Width (W):	1.34" (3.4 cm)
Height (H):	1.06" (2.7 cm)
Mounting (M):	11.14" (28.3 cm)

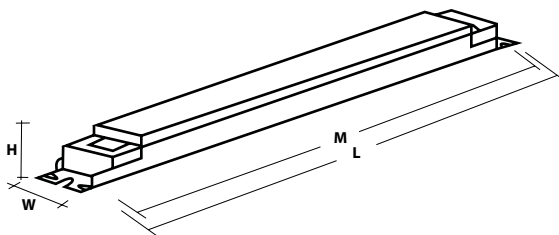

WARRANTY:

Ballast warranty of 5 years for electronic ballast 75 °C. Ballast warranty of 3 years for electronic ballast 90 °C.
 For more information visit our website.

Data is based upon tests performed in a controlled environment and representative of relative performance.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.
 March 9, 2015