


Technical Information Bulletin - LED

E-Lume™

ORDERING INFORMATION

Order code: 63854
Description: LED/MR16E26/7W/30K/38/ELUME
UPC: 69549638549
Case quantity: 48

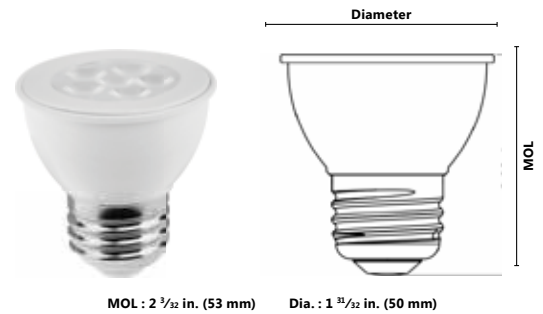


PERFORMANCE DATA

Shape: MR16
Base: E26
Wattage (W): 7
Lamp voltage (VAC): 120
Colour temperature (K)**: 3 000
Average life (L70 hours): 30 000
Initial lumens (lm)*: 500
Initial lumens per watt (lm/W): 71
CRI: 80
Beam angle: 38
Power factor: 0.9
Operating temperature range: - 20 °C / - 4 °F to 45 °C / 113 °F

*Initial lumens range: +/- 5 %

**Typical colour temperature range: +/- 5 %

BEAM SPREAD

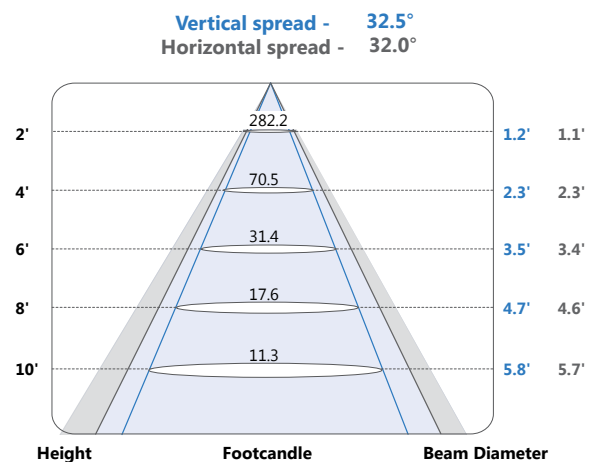

COMPATIBLE DIMMER LIST

Legrand: HCL453P
Cooper: SAL06P, SLC03P, AAL06
Lutron: DVCL-153P, CTCL-153P, MACL-153P, AYCL-253P, DVCL-253P

CAUTIONS

- Turn power off before inspection, installation, or removal.
- Risk of electric shock – do not use where directly exposed to water or weather.
- Suitable for use in open fixtures.
- Suitable for use in damp locations.
- Do not open – no user serviceable parts inside.
- Added weight of the device may cause instability of a freestanding portable luminaire. Use in portable table lamps in which the distance from the bottom of the base to the top of the lampholder does not exceed three (3) times the minimum base diameter.
- Use only on 120 VAC, 60 Hz circuits.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.
- Compatible with most dimmers.
- Three year limited warranty.
- For complete dimmer compatibility and warranty information visit www.standardpro.com.
- Operating temperature: -20°C/-4°F to 45°C/113°F.

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

September 22, 2015

STANDARD®