

Date: _____
 In hands date of project: _____
 Project name/Number: _____
 Name of distributor: _____
 Client #: _____
 Name of end user: _____

ORDERING INFORMATION


Order code: 64652
 Description: LED/OMNI/2.5W/RED/ND/STD
 UPC: 69549646520
 Case quantity: 6 / 48

PERFORMANCE DATA

Shape: OMNI A19
 Wattage (W): 2.5
 Base: E26
 Lamp voltage (VAC): 120
 Finish: Frosted
 Frequency (Hz): 60
 Colour temperature (K)**: Red
 Average life: 25 000
 Initial lumens (lm)*: N/A
 CRI: N/A
 Beam angle: 220
 Power factor: 0.5
 Operating temperature range: -20°C/4°F to 40°C/104°F
 Dimmable: No

*Initial lumens range: +/- 10 %

**Typical colour temperature range: +/- 5 %

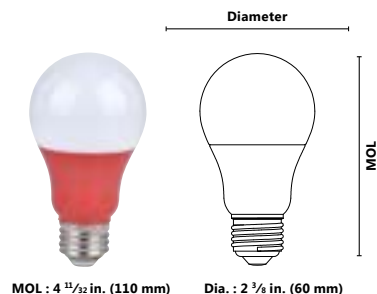

MOL : 4 1/2 in. (110 mm)

Dia. : 2 3/8 in. (60 mm)



CAUTIONS

- Turn power off before inspection, installation, or removal.
- Risk of electrical shock – do not use where directly exposed to water or weather.
- Suitable for use in damp locations.
- Do not open – no user serviceable parts inside.
- Use only on 120 VAC, 60Hz circuits.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.
- Not for use with dimmers.
- For complete warranty information visit www.standardpro.com.
- Not recommended for use with timers.
- Operating temperature: - 20 °C / - 4 °F to 45 °C / 113 °F.
- 3 Years Limited Warranty.

NOTES: This device complies with Part 15 of the FCC rules and has been tested and found to comply with the limits for a Class B digital device. This product may cause interference with other devices. If interference occurs, change the location of the product. Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment. This RFLD device complies with Canadian ICES-005. LED lamps must be stored, operated under suitable environmental conditions and in accordance with, but not limited to, the latest National Electrical Code, cULus and ANSI specifications.

Qty	Description	Price

I accept the specifications of the lamp configuration mentioned above.

Name: _____
 Company: _____
 Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

July 26, 2016

STANDARD®