


Date: _____
 In hands date of project: _____
 Project name/Number: _____
 Name of distributor: _____
 Client #: _____
 Name of end user: _____

ORDERING INFORMATION

Order code: 63740
 Description: LED/C12/5W/27K/F/E12/STD
 UPC: 69549637405
 Case quantity: 48

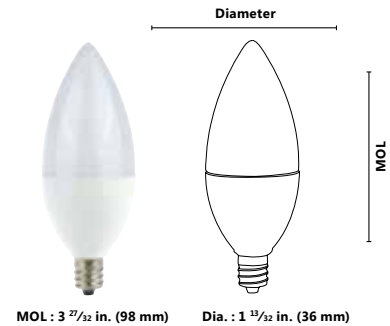

PERFORMANCE DATA

Shape: C12
 Base: E12
 Wattage (W): 5
 Lamp voltage (VAC): 120
 Colour temperature (K)**: 2 700
 Average life (L70 hours): 25 000
 Initial lumens (lm)*: 338
 Initial lumens per watt (lm/W): 68
 CRI: 82
 Beam angle: 232
 Power factor: 0.97
 Operating temperature range: - 20 °C / - 4 °F to 50 °C / 122 °F

*Initial lumens range: +/- 5 %

**Typical colour temperature range: +/- 5 %

COMPATIBLE DIMMER LIST

Cooper:	SLC03P, AAL06
Leviton:	IPL06, 6674
Lutron:	DVCL-153P, CTCL-153P, MACL-153M, AYCL-253P, DVCL-253P



DIMMABLE

DAMP

NO MERCURY

COMPLIANT

WARRANTY

CAUTIONS

- Turn power off before inspection, installation, or removal.
- Risk of electric shock – do not use where directly exposed to water or weather.
- Not for use in completely enclosed recessed fixtures.
- Suitable for use in damp locations.
- Added weight of the device may cause instability of a free-standing portable luminaire. Use only with a portable table lamps in which the distance from the bottom of the base to the top of the lamp holder does not exceed three (3) times the minimum base diameter.
- Do not open – no user serviceable parts inside.
- Use only on 120 VAC, 60 Hz circuits.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.
- The lamp may not be compatible with all dimmers, visit www.standardpro.com to find up-to-date dimmer compatibility information.
- 3 Years Limited Warranty.
- Visit www.standardpro.com for consumer complaint resolution and toll-free numbers.
- Operating temperature: - 20 °C / - 4 °F to 50 °C / 122 °F.

Qty	Description	Price

I accept the specifications of the lamp configuration mentioned above.

Name: _____
 Company: _____
 Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

February 19, 2016

STANDARD[®]