

Date: \_\_\_\_\_  
 In hands date of project: \_\_\_\_\_  
 Project name/Number: \_\_\_\_\_  
 Name of distributor: \_\_\_\_\_  
 Client #: \_\_\_\_\_  
 Name of end user: \_\_\_\_\_



## ORDERING INFORMATION

Order code: 65032  
 Description: LSHOP/40W/40K/120-277/ND/STD  
 UPC: 69549650329  
 Case quantity: 1

## PERFORMANCE DATA

Applications: Designed for residential and commercial applications.  
 Mounting option: Surface or suspended  
 Lens material: Polycarbonate  
 Housing material: White Cold rolled steel  
 Cord length (ft): 5  
 Voltage (V): 120  
 Frequency (Hz): 60  
 Wattage (W): 40  
 Color temperature (K): 4 000  
 CRI: 85  
 Average life in hours (L70): 54 000  
 Lumens: 4 000  
 Efficacy (LPW): 100  
 Beam angle (°): 180  
 Dimmable: No  
 Input Current (Ma): 344  
 Environment: Dry and damp location

### POWER FACTOR (PF)

0.9563

### TOTAL HARMONIC DISTORTION (THD)

<20%

### AMBIENT OPERATING TEMPERATURES

-40°C to 40°C

This lighting equipment complies with Canadian standard ICES-005; for use in residential applications.



\*NOTE: The above table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Standard recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation. Do not mix products of different wattages or types on the same dimming circuit. Some dimmers may require more than one product for stable operation. The maximum number of products is determined by the dimmer wattage rating with LEDs. Be careful, these dimmers have different ratings depending on the product type. Again, refer to the dimmer installation instructions. For example, if the dimmer rating is 150W with LED, a user may use up to sixteen (16) 9W DL.

For a complete list of ENERGY STAR qualified products, please visit [www.standardpro.com](http://www.standardpro.com)

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

November 11, 2016

**STANDARD®**


## ORDERING INFORMATION

Order code: 64972  
 Description: LCR/DL6/18W/35K/2/DD1/STD  
 UPC: 69549649729  
 Case quantity: 1


## DIMENSIONS

Length: 47.28" (120.1 cm)  
 Width: 4.80" (12.2 cm)  
 Depth: 1.42" (3.6 cm)

## PHOTOMETRICS - BEAM SPREAD\*

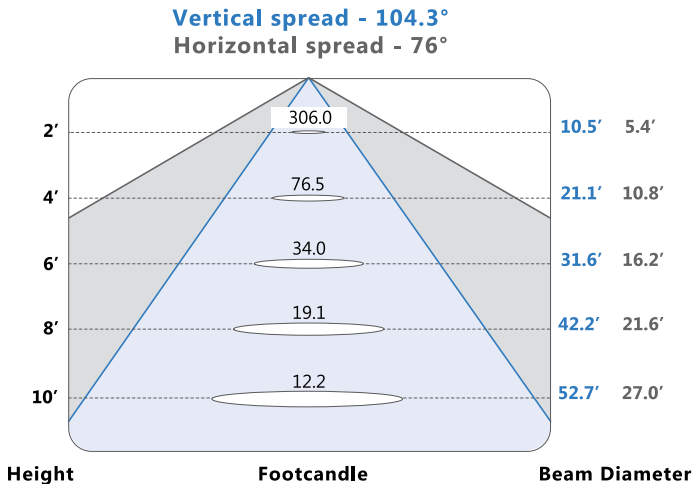

## PHOTOMETRICS - CANDELA DISTRIBUTION\*

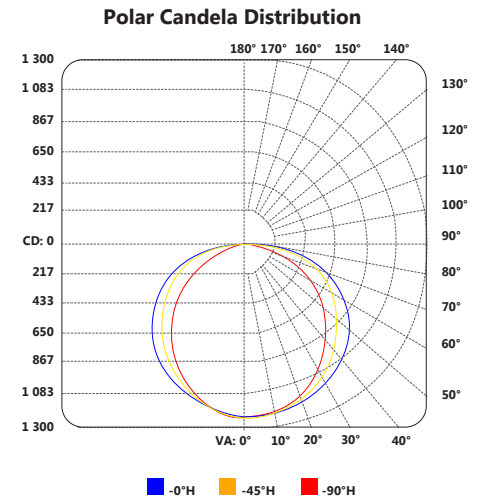

## COEFFICIENTS OF UTILIZATION (ZONAL CAVITY METHOD)\*

RW %:	70	50	30	0	70	50	30	0	50	30	20	50	30	20
RCR: 0	1.19	1.19	1.19	1.19	1.16	1.16	1.16	1.00	1.11	1.11	1.11	1.06	1.06	1.06
1	1.07	1.01	.96	.92	1.04	.99	.95	.81	.95	.91	.88	.91	.88	.85
2	.96	.87	.80	.73	.94	.85	.78	.67	.82	.76	.71	.78	.73	.69
3	.87	.76	.67	.60	.85	.74	.66	.56	.71	.64	.58	.68	.62	.57
4	.80	.67	.57	.50	.77	.65	.57	.47	.63	.55	.49	.60	.54	.48
5	.73	.59	.50	.43	.71	.58	.49	.41	.56	.48	.42	.54	.47	.42
6	.67	.53	.44	.37	.65	.52	.43	.36	.50	.42	.37	.49	.42	.36
7	.62	.48	.39	.33	.61	.47	.39	.32	.46	.38	.32	.44	.37	.32
8	.58	.44	.35	.29	.56	.43	.35	.28	.42	.34	.29	.41	.34	.28
9	.54	.40	.32	.26	.53	.40	.31	.25	.38	.31	.26	.37	.30	.26
10	.51	.37	.29	.23	.49	.37	.29	.23	.35	.28	.23	.35	.28	.23

\* complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

November 11, 2016

**STANDARD**