

# Installation Instructions

for assembly of Locking Suspension Ball to Suspension Damper Rod End

Kit Contains:

- 4 Suspension Damper Assemblies
- 4 Suspension Balls
- 4 Upper Suspension Bushings
- 1 Instruction Sheet

## ⚠ WARNING



**Electrical Shock Hazard**  
Disconnect power before servicing.  
Replace all parts and panels before  
operating.  
Failure to do so can result in death  
or electrical shock.

1. Unplug washer or disconnect power before servicing.
2. Hold suspension ball on its side with the slot feature facing up. See Figure 1.

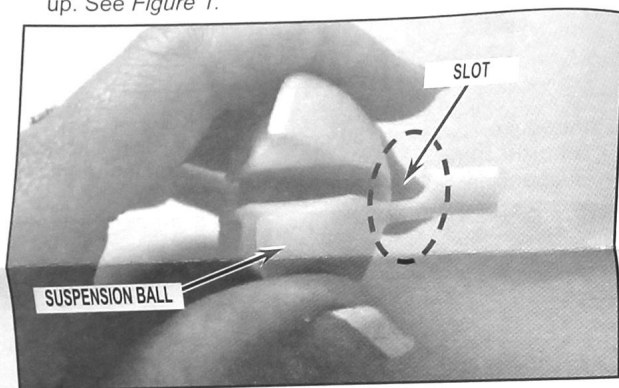


FIGURE 1

3. Align the suspension damper rod in the suspension ball slot. See Figure 2.

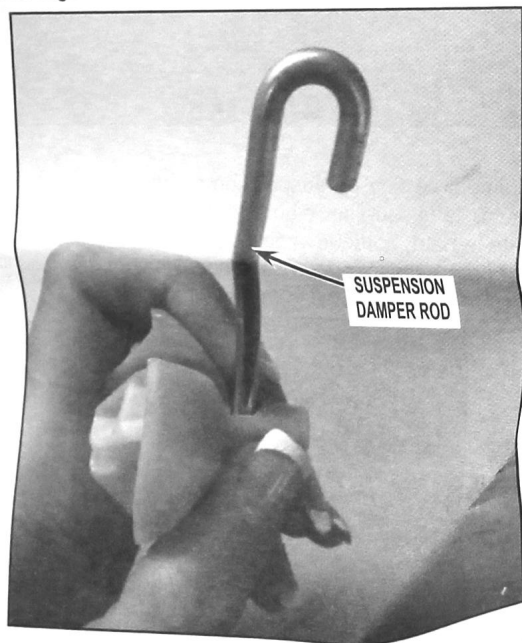


FIGURE 2

4. Flip suspension ball upright. See Figure 3.

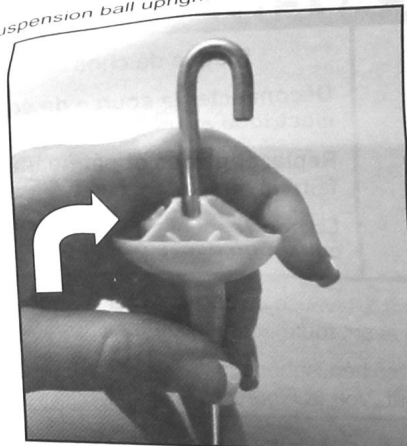


FIGURE 3

5. Align end of suspension damper rod hook into pocket on suspension ball. See Figure 4.

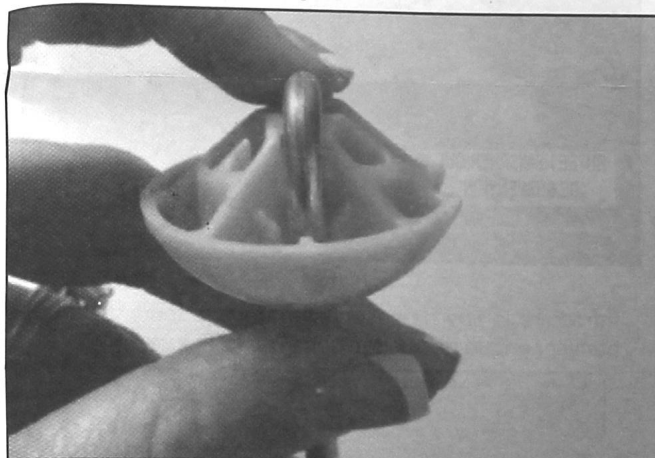


FIGURE 4

6. Hold suspension rod with one hand and with the other, pull suspension ball up. A 'snap' will be felt when the rod is fully seated in the ball. See Figure 5.

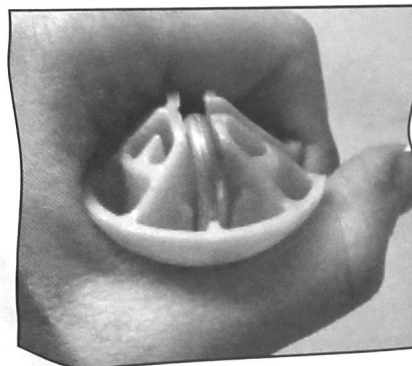


FIGURE 5