



Tri-Proof series

Commonly used in applications such as industrial sites, commercial and public lighting, these LED luminaires are an eco-friendly alternative to traditional fluorescent lighting systems. They will help reduce energy consumption up to 59%. This luminaire balances high performance lighting while providing minimum glare.

Characteristics

- Long life of 50 000 hours
- 120-277 V and 347 V
- 20 W & 40 W
- 4 000 K color temperature
- CRI of 80
- Class 2
- 5 year warranty
- Wet location rated
- Surface or suspended mounting options
- Resists to impacts up to IK10
- Operating temperature -20 to 40°C (-4 to 104°F)



CAT=ViennaCityCenter 3
23:35 only CAT-Tickets



TICKETS



Tri-proof LED luminaire:

Corrosion, water and vandal proof.


A highly efficient robust lighting solution, rated at IP66 with a high impact resistance of IK10.




Water/Dust proof



Pressure proof



Corrosion proof

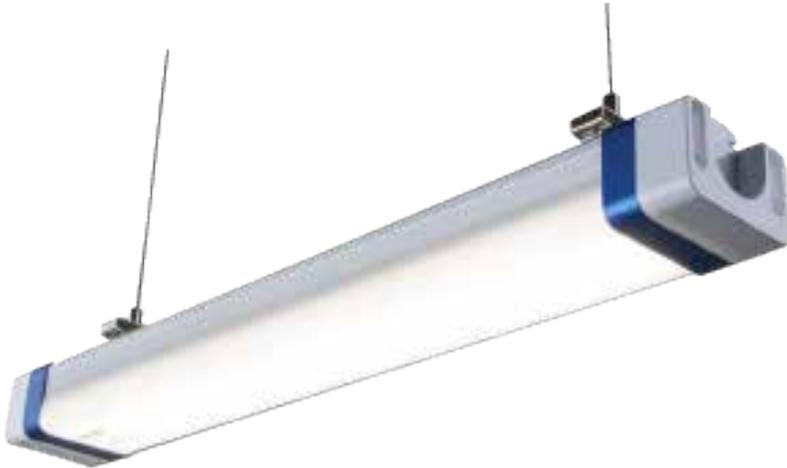


Surface or pendant
mount



Easily interlikable for
a row mount installation

Included in the box:




Mounting Clips

One set each lamp



One 6ft (183cm) cable

with one set of connectors at each end




Sold separately:

Mounting Accessory



Steel aircraft cable

Two pieces per package
64175 - LSVS/ACC/AIRCAB/STD

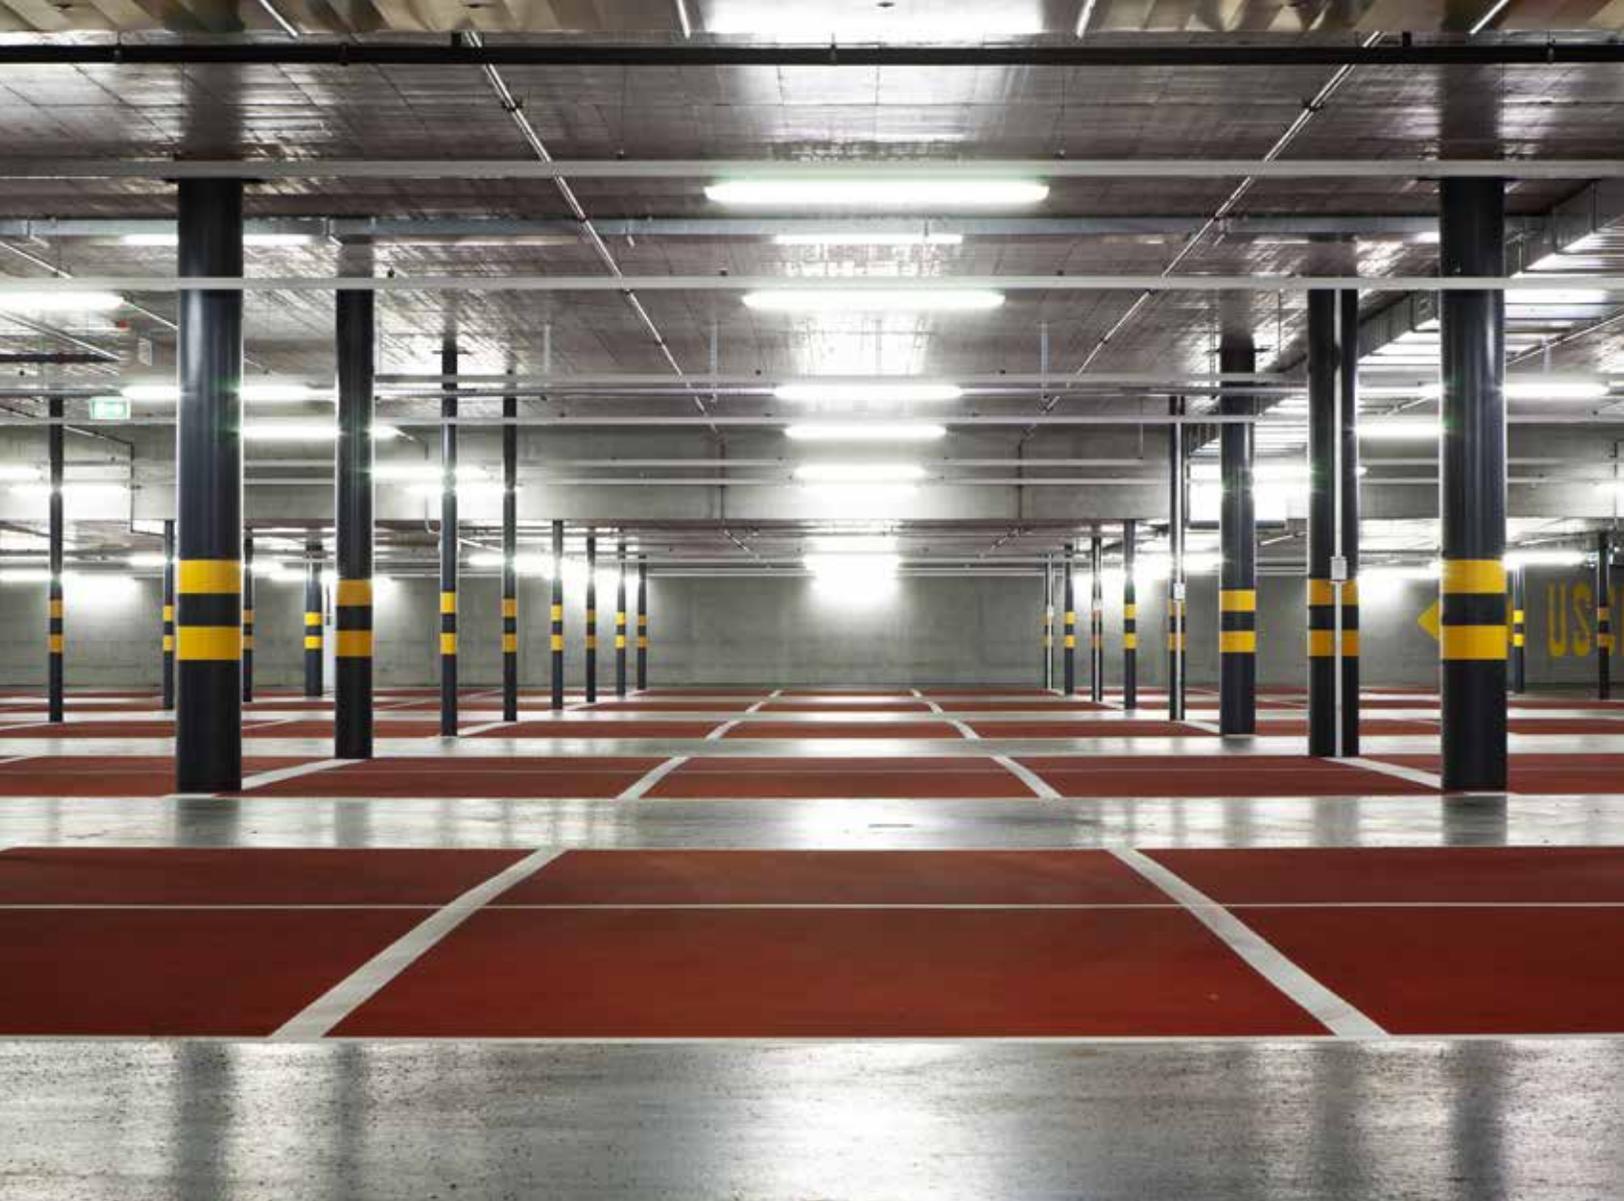


20 W

Width: 2.48 in. (63 mm)



Length: 23.62 in. (600 mm)



Height: 3.27 in. (83 mm)

40 W

Width: 2.48 in. (63 mm)



Length: 47.25 in. (1 200 mm)



Height: 3.27 in. (83 mm)

Order code	Description	Volts (V)	Watts (W)	Initial lumens (lm)	Lumens per watt (lm/w)	Average life (hrs)	CRI	Colour Temp. (K)	Beam angle (°)	Frequency (Hz)	Input current (mA)
64922	LSVS/20W/2FT/40K/2/ND/FP/L/STD	120-277	20	1 900	95	50 000	80	4 000	120	50/60	180
64923	LSVS/40W/4FT/40K/2/ND/FP/L/STD	120-277	40	3 800	95	50 000	80	4 000	120	50/60	360
64924	LSVS/40W/4FT/40K/3/ND/FP/L/STD	347	40	3 800	95	50 000	80	4 000	120	50/60	360

Mounting Accessories (Steel cables)

64175 LSVS/ACC/AIRCAB/STD

